

CHANGE 3

Page 6-5, Table 6-2, Replaceable Parts.

Change: A18 HP and Mfr Part Number to 01710-66568.

Page 6-23, Table 6-2, Replaceable Parts.

Change: A18 HP and Mfr Part Number to 01710-66568.

Delete: A18CR7 and A18CR9.

Add: A18Q10, HP and Mfr Part Number 1853-C036, TRANSISTOR NPN SI PD=310MW FT=250MHZ, Mfr Code 28480.

Add: A18Q11, HP Part Number 1854-0215, TRANSISTOR NPN SI PD=350MW FT=300MHZ, Mfr Code 04713, Mfr Part Number 2N3904.

Page 6-24, Table 6-2, Replaceable Parts.

Add: A18R67, HP Part Number 0757-0279, RESISTOR 3.16K 1% .125W FTC=0±100, Mfr Code 24546, Mfr Part Number C4-1/8-TO-3161-F.

Add: A18R68, HP Part Number 0757-0454, RESISTOR 33.2K 1% .125W FTC=0±100, Mfr Code 24546, Mfr Part Number C4-1/8-TO-3322-F.

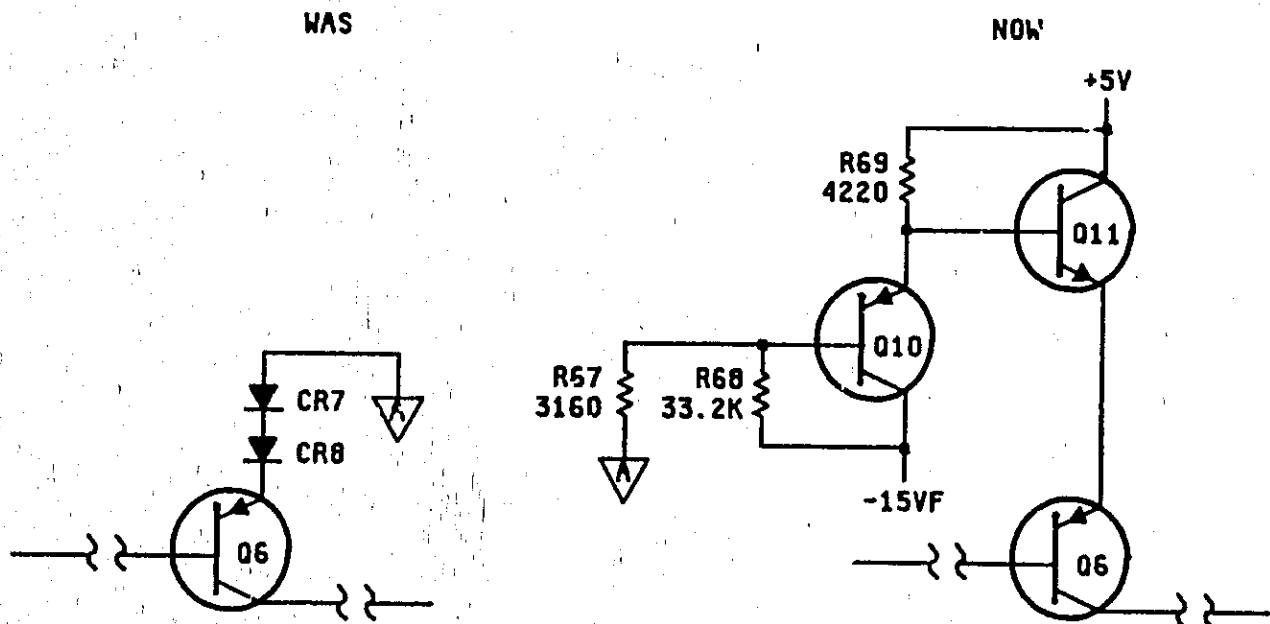
Add: A18R69, HP and Mfr Part Number 0698-3154, RESISTOR 4.22K 1% .125W FTC=0±100, Mfr Code 28480.

Page 8-34, Figure 8-14 (Sheet 1 of 2).

Replace A18 component locator with figure 7 of this manual change sheet.

Page 8-35, Figure 8-14 (Sheet 2 of 2).

Make changes to A18Q6 emitter circuitry as shown below

**CHANGE 4**

Page 6-5, Table 6-2, Replaceable Parts.

Change: J7 to HP and Mfr Part Number 1251-0463, Qty 2, CONNECTOR-BNA SINGLE BLK SLDR-EYE TERM (Attached by H47 and H48).

Add: H47, HP and Mfr Part Number 2950-0007, Qty 2, NUT-HEX-DBL CHAM 5/16-32-THD .09-IN-THK.

Add: H48, HP and Mfr Part Number 2190-0033, Qty 2, WASHER-LK INTL .314-IN-ID.

Page 6-6, Table 6-2, Replaceable Parts.

Change: MP24 HP and Mfr Part Number to 01725-00206.

Change: MP31 HP and Mfr Part Number to 01725-20501.