
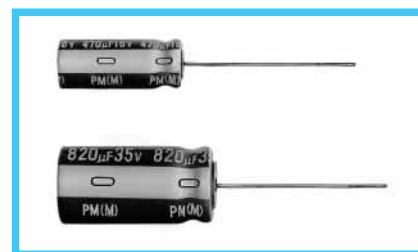



ALUMINUM ELECTROLYTIC CAPACITORS

PM series

Extremely Low Impedance, High Reliability




- High reliability withstanding 5000hour load life at +105°C (3000/2000hours for smaller case sizes as specified below).
- Capacitance ranges available based on the numerical values in E12 series under JIS.

Specifications

Item	Performance Characteristics										
Category Temperature Range	-55 ~ +105°C (6.3 ~ 100V), -40 ~ +105°C (160 ~ 400V), -25 ~ +105°C (450V)										
Rated Voltage Range	6.3 ~ 450V										
Rated Capacitance Range	0.47 ~ 15000µF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	Rated Voltage (V)	6.3 ~ 100							160 ~ 450		
	Leakage current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (µA), whichever is greater.							CV ≤ 1000 : I = 0.1CV+40 (µA) max. (1 minute's) CV > 1000 : I = 0.04CV+100 (µA) max. (1 minute's)		
tan δ	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz, Temperature : 20°C										
	Rated Voltage (V)	6.3	10	16	25	35	50	63 ~ 100	160 ~ 350	400 ~ 450	
Stability at Low Temperature	Rated voltage (V)	6.3 · 10	16	25 · 35	50 ~ 100	160 ~ 200	250	315 ~ 350	400	450	
	Impedance ratio	Z-25°C / Z+20°C	—	—	—	—	—	—	—	15	
		Z-40°C / Z+20°C	—	—	—	—	—	4	8	10	
Endurance	After an application of D.C. bias voltage plus the rated ripple current for 5000 hours (2000 hours for D = 5 and 6.3, 3000 hours for D=8) at 105°C the peak voltage shall not exceed the rated D.C. voltage, capacitors meet the characteristic requirements listed at right.										
	Capacitance change	Within ±20% of initial value									
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours, they meet the characteristic requirements listed at right.										
	Capacitance change	Within ±20% of initial value									
Marking	Printed with white color letter on dark brown sleeve.										

Radial Lead Type

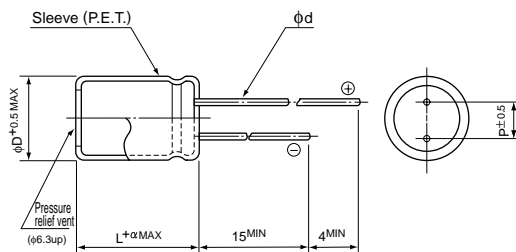


α	φD < 10	1.5
	φD ≥ 10	2.0

	(mm)						
φD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6*	0.8	0.8

*In case L > 25 for the φ12.5 dia. unit, lead dia. φd = 0.8mm.

Type numbering system (Example : 25V 470µF)

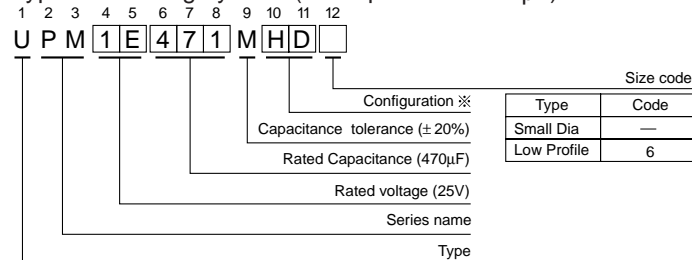


※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve	Sn-Pb finished leadwire PVC sleeve (containing Pb)
5	DD	DH
6.3	ED	EH
8 · 10	PD	PH
12.5 ~ 18	HD	HH

※ Please contact to us if other configurations are required.

Frequency coefficient of rated ripple current

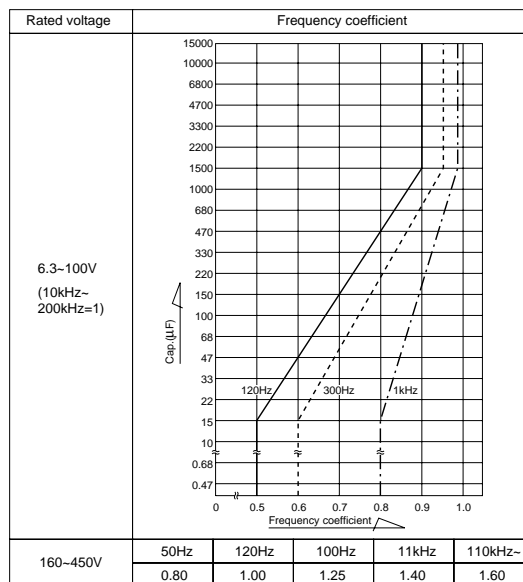

Please refer to page 19, 20, 21 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.

● Dimension table in next page.



■ Dimensions

φD×L (mm)

Cap.(μF)	Code	V(Code)	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)		35 (1V)	
		Size code	—	6	—	6	—	6	—	6	—	6
22	220										5×11	
27	270										5×11	
33	330								5×11		6.3×11	
39	390								5×11		6.3×11	
47	470						5×11		6.3×11		6.3×11	
56	560						5×11		6.3×11		6.3×11	
68	680				5×11		6.3×11		6.3×11		6.3×15	
82	820				5×11		6.3×11		6.3×11		6.3×15	
100	101	5×11			6.3×11		6.3×11		6.3×15		8×11.5	
120	121	5×11			6.3×11		6.3×11		6.3×15		8×15	10×12.5
150	151	6.3×11			6.3×11		6.3×15		8×11.5		8×15	10×12.5
180	181	6.3×11			6.3×11		6.3×15		8×15	10×12.5	8×20	10×15
220	221	6.3×11			6.3×15		8×11.5		8×15	10×12.5	8×20	10×15
270	271	6.3×15			6.3×15		8×15	10×12.5	8×20	10×15	10×20	12.5×15
330	331	6.3×15			8×11.5		8×15	10×12.5	8×20	10×15	10×20	12.5×15
390	391	8×11.5			8×15	10×12.5	8×20	10×15	10×20	12.5×15	10×25	12.5×15
470	471	8×15	10×12.5		8×15	10×12.5	8×20	10×15	10×20	12.5×15	10×31.5	16×15
560	561	8×15	10×12.5	8×20	10×15	10×20	12.5×15	10×25	12.5×15	12.5×20	12.5×20	16×15
680	681	8×20	10×15	8×20	10×15	10×20	12.5×15	10×31.5	16×15	16×15	12.5×25	18×15
820	821	8×20	10×15	10×20	12.5×15	10×25	12.5×15	12.5×20	16×15	12.5×25	18×15	
1000	102	10×20	12.5×15	10×20	12.5×15	10×31.5	16×15	12.5×25	18×15	12.5×31.5	16×20	
1200	122	10×20	12.5×15	10×25	12.5×15	12.5×20	16×15	12.5×25	18×15	12.5×35.5	16×25	
1500	152	10×25	12.5×15	10×31.5	16×15	12.5×25	18×15	12.5×31.5	16×20	12.5×40	18×20	
1800	182	10×31.5	16×15	12.5×20	16×15	12.5×31.5	16×20	12.5×35.5	16×25	16×31.5	18×25	
2200	222	10×31.5	16×15	12.5×25	18×15	12.5×31.5	16×20	12.5×40	18×20	16×35.5	18×31.5	
2700	272	12.5×25	18×15	12.5×31.5	16×20	12.5×35.5	16×25	16×31.5	18×25	16×40	18×35.5	
3300	332	12.5×25	18×15	12.5×35.5	16×20	12.5×40	18×20	16×35.5	18×31.5	18×40		
3900	392	12.5×31.5	16×20	12.5×40	18×20	16×31.5	18×25	16×40	18×35.5			
4700	472	12.5×35.5	18×20	16×31.5	18×25	16×35.5	18×25	18×31.5	18×40			
5600	562	12.5×40	18×20	16×35.5	18×25	16×40	18×35.5					
6800	682	16×31.5	18×25	16×35.5	18×31.5	18×35.5						
8200	822	16×35.5	18×31.5	16×40	18×35.5	18×40						
10000	103	16×40	18×31.5	18×40								
12000	123	18×35.5										
15000	153	18×40										

Cap.(μF)	Code	V(Code)	50 (1H)		63 (1J)		80 (1K)		100 (2A)	
		Size code	—	6	—	6	—	6	—	6
0.47	R47		5×11						5×11	
0.68	R68		5×11						5×11	
1	010		5×11						5×11	
1.5	1R5		5×11						5×11	
2.2	2R2		5×11						5×11	
3.3	3R3		5×11						5×11	
4.7	4R7		5×11				5×11		6.3×11	
6.8	6R8		5×11				5×11		6.3×11	
10	100		5×11		5×11		6.3×11		6.3×11	
12	120		5×11		5×11		6.3×11		6.3×11	
15	150		5×11		6.3×11		6.3×11		6.3×15	
18	180		5×11		6.3×11		6.3×11		6.3×15	
22	220	6.3×11			6.3×11		6.3×15		8×11.5	
27	270	6.3×11			6.3×11		6.3×15		8×15	10×12.5
33	330	6.3×11			6.3×15		8×11.5		8×15	10×12.5
39	390	6.3×11			6.3×15		8×15	10×12.5	8×20	10×15
47	470	6.3×15			8×11.5		8×15	10×12.5	10×20	12.5×15
56	560	6.3×15			8×15	10×12.5	8×20	10×15	10×20	12.5×15
68	680	8×11.5			8×15	10×12.5	10×20	12.5×15	10×25	12.5×15
82	820	8×15	10×12.5		8×20	10×15	10×20	12.5×15	10×31.5	16×15
100	101	8×20	10×15	10×20	12.5×15	10×25	12.5×15	10×31.5	10×31.5	16×15
120	121	8×20	10×15	10×20	12.5×15	10×31.5	16×15	12.5×25	12.5×25	16×15
150	151	10×20	12.5×15	10×25	12.5×15	10×31.5	16×15	12.5×25	12.5×25	18×15
180	181	10×20	12.5×15	10×31.5	16×15	12.5×25	16×15	12.5×31.5	16×20	
220	221	10×25	12.5×15	12.5×20	16×15	12.5×31.5	18×15	12.5×35.5	16×25	
270	271	10×31.5	16×15	12.5×25	18×15	12.5×31.5	16×20	12.5×40	18×20	
330	331	10×31.5	16×15	12.5×25	18×15	12.5×35.5	16×25	16×31.5	18×25	
390	391	12.5×25	16×15	12.5×31.5	16×20	12.5×40	18×20	16×35.5	18×31.5	
470	471	12.5×25	18×15	12.5×35.5	16×25	16×31.5	18×25	16×40	18×35.5	
560	561	12.5×31.5	16×20	12.5×40	18×20	16×35.5	18×31.5	18×35.5		
680	681	12.5×35.5	16×20	16×31.5	18×25	16×40	18×31.5	18×40		
820	821	12.5×40	18×20	16×35.5	18×31.5	18×35.5				
1000	102	16×31.5	18×25	16×40	18×35.5	18×40				
1200	122	16×35.5	18×31.5	18×40						
1500	152	16×40	18×31.5							
1800	182	18×35.5								
2200	222	18×40								

※In case of low profile type, [6] will be put at 12th digit of type numbering system.

Dimension table for 160 ~ 450V products are shown in 97 page.



Standard ratings

V(Code) Size code		6.3 (0J)										
		Item	Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)		Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)	
				20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz		20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz
100	101	5 × 11	0.85	1.70	150	99						
120	121	5 × 11	0.65	1.30	175	115						
150	151	6.3 × 11	0.49	0.98	225	155						
180	181	6.3 × 11	0.39	0.78	250	175						
220	221	6.3 × 11	0.30	0.60	285	205						
270	271	6.3 × 15	0.24	0.48	370	275						
330	331	6.3 × 15	0.20	0.40	405	310						
390	391	8 × 11.5	0.17	0.34	445	345						
470	471	8 × 15	0.14	0.28	550	435	10 × 12.5	0.14	0.28	635	455	
560	561	8 × 15	0.12	0.24	595	480	10 × 12.5	0.13	0.26	600	485	
680	681	8 × 20	0.10	0.20	730	605	10 × 15	0.11	0.22	825	580	
820	821	8 × 20	0.085	0.17	795	670	10 × 15	0.095	0.19	825	635	
1000	102	10 × 20	0.075	0.15	950	820	12.5 × 15	0.085	0.17	890	765	
1200	122	10 × 20	0.065	0.13	1060	895	12.5 × 15	0.075	0.15	950	835	
1500	152	10 × 25	0.055	0.11	1260	1090	12.5 × 15	0.065	0.13	1020	915	
1800	182	10 × 31.5	0.050	0.10	1370	1230	16 × 15	0.055	0.11	1270	1140	
2200	222	10 × 31.5	0.043	0.086	1470	1320	16 × 15	0.049	0.098	1340	1200	
2700	272	12.5 × 25	0.038	0.076	1700	1430	18 × 15	0.044	0.088	1500	1350	
3300	332	12.5 × 25	0.034	0.068	1710	1530	18 × 15	0.039	0.078	1600	1440	
3900	392	12.5 × 31.5	0.031	0.062	1980	1710	16 × 20	0.036	0.072	1770	1540	
4700	472	12.5 × 35.5	0.028	0.056	2230	1890	18 × 20	0.032	0.064	1920	1720	
5600	562	12.5 × 40	0.026	0.052	2460	2040	18 × 20	0.030	0.060	1980	1780	
6800	682	16 × 31.5	0.024	0.048	2510	2130	18 × 25	0.027	0.054	2350	1980	
8200	822	16 × 35.5	0.022	0.044	2770	2290	18 × 31.5	0.025	0.050	2390	2150	
10000	103	16 × 40	0.020	0.040	3110	2470	18 × 31.5	0.023	0.046	2720	2240	
12000	123	18 × 35.5	0.019	0.038	3050	2530						
15000	153	18 × 40	0.018	0.036	3300	2660						

V(Code) Size code		10 (1A)										
		Item	Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)		Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)	
				20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz		20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz
68	680	5 × 11	0.80	1.60	155	97						
82	820	5 × 11	0.65	1.30	175	110						
100	101	6.3 × 11	0.55	1.10	210	135						
120	121	6.3 × 11	0.44	0.88	235	160						
150	151	6.3 × 11	0.35	0.70	265	185						
180	181	6.3 × 11	0.29	0.58	290	205						
220	221	6.3 × 15	0.24	0.48	370	270						
270	271	6.3 × 15	0.20	0.40	405	300						
330	331	8 × 11.5	0.16	0.32	460	350						
390	391	8 × 15	0.14	0.28	550	430	10 × 12.5	0.15	0.30	625	430	
470	471	8 × 15	0.12	0.24	595	475	10 × 12.5	0.13	0.26	600	475	
560	561	8 × 20	0.10	0.20	730	590	10 × 15	0.11	0.22	700	565	
680	681	8 × 20	0.085	0.17	795	660	10 × 15	0.090	0.18	825	635	
820	821	10 × 20	0.070	0.14	985	835	12.5 × 15	0.080	0.16	920	780	
1000	102	10 × 20	0.060	0.12	1060	915	12.5 × 15	0.065	0.13	1040	895	
1200	122	10 × 25	0.050	0.10	1260	1120	12.5 × 15	0.060	0.12	1060	930	
1500	152	10 × 31.5	0.045	0.090	1450	1290	16 × 15	0.050	0.10	1330	1190	
1800	182	12.5 × 20	0.039	0.078	1470	1320	16 × 15	0.044	0.088	1420	1270	
2200	222	12.5 × 25	0.034	0.068	1710	1530	18 × 15	0.039	0.078	1600	1440	
2700	272	12.5 × 31.5	0.030	0.060	1980	1740	16 × 20	0.035	0.070	1740	1560	
3300	332	12.5 × 35.5	0.026	0.052	2230	1960	16 × 20	0.031	0.062	1850	1660	
3900	392	12.5 × 40	0.024	0.048	2460	2120	18 × 20	0.028	0.056	2050	1840	
4700	472	16 × 31.5	0.023	0.046	2420	2170	18 × 25	0.026	0.052	2350	2020	
5600	562	16 × 35.5	0.021	0.042	2610	2340	18 × 25	0.024	0.048	2340	2100	
6800	682	16 × 35.5	0.020	0.040	2770	2410	18 × 31.5	0.022	0.044	2720	2280	
8200	822	16 × 40	0.019	0.038	3110	2530	18 × 35.5	0.021	0.042	3050	2420	
10000	103	18 × 40	0.017	0.034	3300	2730						

※ In case of low profile type, 6 will be put at 12th digit of type numbering system.



Standard ratings

V(Code) Size Code Item Cap.(μF) Code		16 (1C)										
		—					6					
		Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)		Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)		
20°C / 100kHz	-10°C / 100kHz		105°C / 100kHz	105°C / 120Hz	20°C / 100kHz	-10°C / 100kHz		105°C / 100kHz	105°C / 120Hz			
47	470	5 × 11	0.80	1.60	155	92						
56	560	5 × 11	0.65	1.30	175	105						
68	680	6.3 × 11	0.50	1.00	220	135						
82	820	6.3 × 11	0.42	0.84	240	155						
100	101	6.3 × 11	0.35	0.70	265	175						
120	121	6.3 × 11	0.29	0.58	290	195						
150	151	6.3 × 15	0.23	0.46	375	260						
180	181	6.3 × 15	0.20	0.40	405	285						
220	221	8 × 11.5	0.16	0.32	460	335						
270	271	8 × 15	0.14	0.28	550	410	10 × 12.5	0.14	0.28	625	430	
330	331	8 × 15	0.12	0.24	595	455	10 × 12.5	0.12	0.24	625	480	
390	391	8 × 20	0.10	0.20	730	570	10 × 15	0.10	0.20	730	570	
470	471	8 × 20	0.090	0.18	770	615	10 × 15	0.090	0.18	825	615	
560	561	10 × 20	0.075	0.15	950	770	12.5 × 15	0.080	0.16	920	745	
680	681	10 × 20	0.065	0.13	1060	845	12.5 × 15	0.070	0.14	985	815	
820	821	10 × 25	0.055	0.11	1260	1030	12.5 × 15	0.060	0.12	1060	895	
1000	102	10 × 31.5	0.047	0.094	1410	1210	16 × 15	0.055	0.11	1270	1090	
1200	122	12.5 × 20	0.041	0.082	1430	1250	16 × 15	0.046	0.092	1390	1220	
1500	152	12.5 × 25	0.036	0.072	1700	1490	18 × 15	0.041	0.082	1560	1400	
1800	182	12.5 × 31.5	0.032	0.064	1880	1690	16 × 20	0.037	0.074	1700	1530	
2200	222	12.5 × 31.5	0.028	0.056	2010	1800	16 × 20	0.033	0.066	1800	1620	
2700	272	12.5 × 35.5	0.025	0.050	2230	1990	16 × 25	0.030	0.060	2190	1800	
3300	332	12.5 × 40	0.023	0.046	2460	2160	18 × 20	0.027	0.054	2090	1880	
3900	392	16 × 31.5	0.022	0.044	2510	2220	18 × 25	0.025	0.050	2350	2060	
4700	472	16 × 35.5	0.020	0.040	2680	2410	18 × 31.5	0.023	0.046	2720	2240	
5600	562	16 × 40	0.019	0.038	3110	2530	18 × 35.5	0.022	0.044	2620	2350	
6800	682	18 × 35.5	0.018	0.036	3050	2610						
8200	822	18 × 40	0.017	0.034	3300	2730						

V(Code) Size Code Item Cap.(μF) Code		25 (1E)										
		—					6					
		Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)		Case size φD × L (mm)	Impedance (Ω MAX)		Rated ripple (mA rms)		
20°C / 100kHz	-10°C / 100kHz		105°C / 100kHz	105°C / 120Hz	20°C / 100kHz	-10°C / 100kHz		105°C / 100kHz	105°C / 120Hz			
33	330	5 × 11	0.80	1.60	155	88						
39	390	5 × 11	0.65	1.30	175	100						
47	470	6.3 × 11	0.55	1.10	210	125						
56	560	6.3 × 11	0.44	0.88	235	140						
68	680	6.3 × 11	0.36	0.72	260	160						
82	820	6.3 × 11	0.30	0.60	285	180						
100	101	6.3 × 15	0.24	0.48	370	245						
120	121	6.3 × 15	0.20	0.40	405	275						
150	151	8 × 11.5	0.16	0.32	460	320						
180	181	8 × 15	0.14	0.28	550	390	10 × 12.5	0.15	0.30	625	395	
220	221	8 × 15	0.11	0.22	625	455	10 × 12.5	0.13	0.26	600	435	
270	271	8 × 20	0.095	0.19	750	560	10 × 15	0.11	0.22	700	525	
330	331	8 × 20	0.085	0.17	795	610	10 × 15	0.095	0.19	825	575	
390	391	10 × 20	0.070	0.14	985	770	12.5 × 15	0.080	0.16	920	720	
470	471	10 × 20	0.065	0.13	1060	810	12.5 × 15	0.070	0.14	985	785	
560	561	10 × 25	0.055	0.11	1260	990	12.5 × 15	0.060	0.12	1060	860	
680	681	10 × 31.5	0.046	0.092	1420	1180	16 × 15	0.055	0.11	1270	1050	
820	821	12.5 × 20	0.041	0.082	1440	1210	16 × 15	0.049	0.098	1340	1130	
1000	102	12.5 × 25	0.036	0.072	1700	1430	18 × 15	0.043	0.086	1520	1310	
1200	122	12.5 × 25	0.032	0.064	1760	1550	18 × 15	0.039	0.078	1600	1400	
1500	152	12.5 × 31.5	0.029	0.058	1980	1780	16 × 20	0.034	0.068	1770	1590	
1800	182	12.5 × 35.5	0.026	0.052	2230	1960	16 × 25	0.031	0.062	2190	1780	
2200	222	12.5 × 40	0.024	0.048	2460	2120	18 × 20	0.028	0.056	2050	1840	
2700	272	16 × 31.5	0.022	0.044	2510	2220	18 × 25	0.025	0.050	2350	2060	
3300	332	16 × 35.5	0.020	0.040	2770	2410	18 × 31.5	0.023	0.046	2720	2240	
3900	392	16 × 40	0.019	0.038	3110	2530	18 × 35.5	0.021	0.042	3050	2420	
4700	472	18 × 40	0.018	0.036	3300	2660						

※ In case of low profile type, [6] will be put at 12th digit of type numbering system.



Standard ratings

Cap. (μF)		V(Code) Size code Item Code		35 (1V)									
				—				6					
				Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms)		Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms)	
20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz		20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz					
22	220	5 × 11	0.75	1.50	160	85							
27	270	5 × 11	0.60	1.20	180	99							
33	330	6.3 × 11	0.49	0.98	225	125							
39	390	6.3 × 11	0.41	0.82	245	140							
47	470	6.3 × 11	0.34	0.68	270	160							
56	560	6.3 × 11	0.28	0.56	295	180							
68	680	6.3 × 15	0.24	0.48	370	230							
82	820	6.3 × 15	0.19	0.38	415	265							
100	101	8 × 11.5	0.16	0.32	460	305							
120	121	8 × 15	0.14	0.28	550	370	10 × 12.5	0.15	0.30	625	375		
150	151	8 × 15	0.12	0.24	595	415	10 × 12.5	0.12	0.24	625	435		
180	181	8 × 20	0.10	0.20	730	520	10 × 15	0.11	0.22	700	500		
220	221	8 × 20	0.085	0.17	795	580	10 × 15	0.090	0.18	825	560		
270	271	10 × 20	0.070	0.14	985	735	12.5 × 15	0.080	0.16	920	690		
330	331	10 × 20	0.060	0.12	1060	810	12.5 × 15	0.065	0.13	1020	780		
390	391	10 × 25	0.055	0.11	1260	955	12.5 × 15	0.060	0.12	1060	825		
470	471	10 × 31.5	0.046	0.092	1450	1130	16 × 15	0.055	0.11	1270	1010		
560	561	12.5 × 20	0.041	0.082	1430	1160	16 × 15	0.048	0.096	1360	1100		
680	681	12.5 × 25	0.036	0.072	1700	1370	18 × 15	0.042	0.084	1540	1270		
820	821	12.5 × 25	0.032	0.064	1760	1490	18 × 15	0.038	0.076	1620	1370		
1000	102	12.5 × 31.5	0.029	0.058	1980	1710	16 × 20	0.034	0.068	1770	1530		
1200	122	12.5 × 35.5	0.026	0.052	2230	1920	16 × 25	0.031	0.062	2190	1740		
1500	152	12.5 × 40	0.024	0.048	2460	2120	18 × 20	0.028	0.056	2050	1840		
1800	182	16 × 31.5	0.022	0.044	2510	2220	18 × 25	0.025	0.050	2350	2060		
2200	222	16 × 35.5	0.020	0.040	2770	2410	18 × 31.5	0.023	0.046	2720	2240		
2700	272	16 × 40	0.018	0.036	3110	2610	18 × 35.5	0.021	0.042	3050	2420		
3300	332	18 × 40	0.017	0.034	3300	2730							

Cap. (μF)		V(Code) Size code Item Code		50 (1H)									
				—				6					
				Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms)		Case size φD × L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms)	
20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz		20°C / 100kHz	-10°C / 100kHz	105°C / $\frac{10kHz}{200kHz}$	105°C / 120Hz					
0.47	R47	5 × 11	23.0	46.0	22	11							
0.68	R68	5 × 11	16.0	32.0	28	14							
1	010	5 × 11	11.0	22.0	36	18							
1.5	1R5	5 × 11	7.50	15.0	45	22							
2.2	2R2	5 × 11	5.00	10.0	54	27							
3.3	3R3	5 × 11	3.30	6.60	66	33							
4.7	4R7	5 × 11	2.20	4.40	81	40							
6.8	6R8	5 × 11	1.80	3.60	91	45							
10	100	5 × 11	1.40	2.80	115	57							
12	120	5 × 11	1.20	2.40	125	62							
15	150	5 × 11	0.93	1.86	145	72							
18	180	5 × 11	0.80	1.60	165	79							
22	220	6.3 × 11	0.65	1.30	195	100							
27	270	6.3 × 11	0.53	1.06	215	115							
33	330	6.3 × 11	0.43	0.86	240	135							
39	390	6.3 × 11	0.36	0.72	260	150							
47	470	6.3 × 15	0.30	0.60	330	195							
56	560	6.3 × 15	0.25	0.50	360	220							
68	680	8 × 11.5	0.20	0.40	415	255							
82	820	8 × 15	0.17	0.34	505	320	10 × 12.5	0.18	0.36	510	330		
100	101	8 × 20	0.14	0.28	620	410	10 × 15	0.16	0.32	580	385		
120	121	8 × 20	0.12	0.24	755	455	10 × 15	0.13	0.26	755	435		
150	151	10 × 20	0.10	0.20	820	570	12.5 × 15	0.11	0.22	785	545		
180	181	10 × 20	0.085	0.17	945	635	12.5 × 15	0.095	0.19	845	605		
220	221	10 × 25	0.075	0.15	1150	760	12.5 × 15	0.080	0.16	920	670		
270	271	10 × 31.5	0.065	0.13	1200	900	16 × 15	0.070	0.14	1120	840		
330	331	10 × 31.5	0.055	0.11	1300	995	16 × 15	0.060	0.12	1210	925		
390	391	12.5 × 25	0.048	0.096	1440	1120	16 × 15	0.055	0.11	1270	990		
470	471	12.5 × 25	0.044	0.088	1500	1190	18 × 15	0.046	0.092	1470	1170		
560	561	12.5 × 31.5	0.040	0.080	1720	1360	16 × 20	0.044	0.088	1550	1260		
680	681	12.5 × 35.5	0.036	0.072	1890	1530	16 × 20	0.040	0.080	1630	1350		
820	821	12.5 × 40	0.033	0.066	2120	1700	18 × 20	0.036	0.072	1810	1530		
1000	102	16 × 31.5	0.030	0.060	2120	1830	18 × 25	0.033	0.066	2020	1730		
1200	122	16 × 35.5	0.028	0.056	2320	1990	18 × 31.5	0.031	0.062	2140	1880		
1500	152	16 × 40	0.026	0.052	2650	2170	18 × 31.5	0.029	0.058	2340	1990		
1800	182	18 × 35.5	0.025	0.050	2620	2210							
2200	222	18 × 40	0.024	0.048	2790	2300							

※ In case of low profile type, 6 will be put at 12th digit of type numbering system.

Standard ratings

Cap. (μF)		V(Code) Size code Item Code		63 (1J)											
				—				6							
				Case size φD × L (mm)		Impedance (Ω MAX.)		Rated ripple (mA rms)		Case size φD × L (mm)		Impedance (Ω MAX.)		Rated ripple (mA rms)	
						20°C / 100kHz	-10°C / 100kHz	105°C / 10kHz ~ 200kHz	105°C / 120Hz			20°C / 100kHz	-10°C / 100kHz	105°C / 10kHz ~ 200kHz	105°C / 120Hz
10	100	5 × 11	1.06	2.12	135	67									
12	120	5 × 11	0.93	1.86	145	72									
15	150	6.3 × 11	0.73	1.46	185	92									
18	180	6.3 × 11	0.63	1.26	195	100									
22	220	6.3 × 11	0.52	1.04	215	110									
27	270	6.3 × 11	0.43	0.86	240	130									
33	330	6.3 × 15	0.35	0.70	305	170									
39	390	6.3 × 15	0.30	0.60	330	190									
47	470	8 × 11.5	0.25	0.50	365	215									
56	560	8 × 15	0.21	0.42	450	275	10 × 12.5	0.23	0.46	450	275				
68	680	8 × 15	0.17	0.34	500	315	10 × 12.5	0.19	0.38	495	310				
82	820	8 × 20	0.15	0.30	600	385	10 × 15	0.16	0.32	580	375				
100	101	10 × 20	0.12	0.24	750	495	12.5 × 15	0.14	0.28	695	460				
120	121	10 × 20	0.10	0.20	820	555	12.5 × 15	0.12	0.24	750	510				
150	151	10 × 25	0.090	0.18	950	665	12.5 × 15	0.095	0.19	845	590				
180	181	10 × 31.5	0.075	0.15	1110	790	16 × 15	0.080	0.16	1050	750				
220	221	12.5 × 20	0.065	0.13	1140	835	16 × 15	0.070	0.14	1120	820				
270	271	12.5 × 25	0.055	0.11	1340	1000	18 × 15	0.060	0.12	1290	965				
330	331	12.5 × 25	0.049	0.098	1420	1090	18 × 15	0.050	0.10	1410	1080				
390	391	12.5 × 31.5	0.043	0.086	1620	1260	16 × 20	0.047	0.094	1500	1170				
470	471	12.5 × 35.5	0.039	0.078	1780	1420	16 × 25	0.042	0.084	1700	1350				
560	561	12.5 × 40	0.035	0.070	1950	1580	18 × 20	0.039	0.078	1730	1400				
680	681	16 × 31.5	0.032	0.064	2050	1700	18 × 25	0.035	0.070	1940	1610				
820	821	16 × 35.5	0.029	0.058	2220	1880	18 × 31.5	0.032	0.064	2110	1780				
1000	102	16 × 40	0.027	0.054	2370	2050	18 × 35.5	0.029	0.058	2280	1970				
1200	122	18 × 40	0.025	0.050	2510	2210									

Cap. (μF)		V(Code) Size code Item Code		80 (1K)											
				—				6							
				Case size φD × L (mm)		Impedance (Ω MAX.)		Rated ripple (mA rms)		Case size φD × L (mm)		Impedance (Ω MAX.)		Rated ripple (mA rms)	
						20°C / 100kHz	-10°C / 100kHz	105°C / 10kHz ~ 200kHz	105°C / 120Hz			20°C / 100kHz	-10°C / 100kHz	105°C / 10kHz ~ 200kHz	105°C / 120Hz
4.7	4R7	5 × 11	4.20	11.00	53	26									
6.8	6R8	5 × 11	2.60	7.00	68	34									
10	100	6.3 × 11	1.70	4.60	87	43									
12	120	6.3 × 11	1.40	3.80	96	48									
15	150	6.3 × 11	1.20	3.20	104	52									
18	180	6.3 × 11	1.00	2.70	150	58									
22	220	6.3 × 15	0.77	2.10	135	71									
27	270	6.3 × 15	0.63	1.70	220	80									
33	330	8 × 11.5	0.53	1.40	275	132									
39	390	8 × 15	0.46	1.20	272	156	10 × 12.5	0.49	1.30	280	155				
47	470	8 × 15	0.39	1.10	295	175	10 × 12.5	0.42	1.10	293	174				
56	560	8 × 20	0.34	0.92	490	208	10 × 15	0.36	0.97	337	202				
68	680	10 × 20	0.28	0.76	426	264	12.5 × 15	0.31	0.84	402	249				
82	820	10 × 20	0.25	0.68	620	284	12.5 × 15	0.27	0.73	430	273				
100	101	10 × 25	0.21	0.57	795	347	12.5 × 15	0.23	0.62	466	308				
120	121	10 × 31.5	0.18	0.49	606	406	16 × 15	0.20	0.54	663	444				
150	151	10 × 31.5	0.15	0.41	955	459	16 × 15	0.18	0.47	699	484				
180	181	12.5 × 25	0.13	0.35	1040	520	16 × 15	0.15	0.41	766	543				
220	221	12.5 × 31.5	0.12	0.32	816	595	18 × 15	0.13	0.35	881	643				
270	271	12.5 × 31.5	0.10	0.27	1270	667	16 × 20	0.11	0.30	1240	742				
330	331	12.5 × 35.5	0.088	0.24	1450	767	16 × 25	0.099	0.27	1440	874				
390	391	12.5 × 40	0.078	0.21	1610	822	18 × 20	0.089	0.24	1450	908				
470	471	16 × 31.5	0.069	0.19	1790	1150	18 × 25	0.080	0.22	1650	1060				
560	561	16 × 35.5	0.062	0.17	2000	1300	18 × 31.5	0.072	0.19	1750	1210				
680	681	16 × 40	0.055	0.15	2200	1470	18 × 31.5	0.065	0.18	1850	1300				
820	821	18 × 35.5	0.049	0.13	2250	1590									
1000	102	18 × 40	0.044	0.12	2370	1790									

※ In case of low profile type, [6] will be put at 12th digit of type numbering system.



Standard ratings

Cap.(μ F)	V(Code) Size code Item Code	100 (2A)										
		Case size ϕ D \times L (mm)	—				6					
			Impedance (Ω MAX.)		Rated ripple (mA rms)		Case size ϕ D \times L (mm)	Impedance (Ω MAX.)		Rated ripple (mA rms)		
			20°C / 100kHz	-10°C / 100kHz	105°C / 10kHz ~ 200kHz	105°C / 120Hz		20°C / 100kHz	-10°C / 100kHz	105°C / 10kHz ~ 200kHz	105°C / 120Hz	
0.47	R47	5 \times 11	43.0	116.0	17	8						
0.68	R68	5 \times 11	23.0	62.0	23	11						
1	010	5 \times 11	17.0	46.0	27	13						
1.5	1R5	5 \times 11	10.0	27.0	35	17						
2.2	2R2	5 \times 11	6.60	18.0	43	21						
3.3	3R3	5 \times 11	4.10	11.0	54	27						
4.7	4R7	6.3 \times 11	2.80	7.60	68	34						
6.8	6R8	6.3 \times 11	1.90	5.10	83	41						
10	100	6.3 \times 11	1.20	3.20	104	52						
12	120	6.3 \times 11	1.00	2.70	150	57						
15	150	6.3 \times 15	0.81	2.20	131	65						
18	180	6.3 \times 15	0.67	1.80	220	73						
22	220	8 \times 11.5	0.55	1.50	275	122						
27	270	8 \times 15	0.47	1.30	269	146	10 \times 12.5	0.50	1.40	380	145	
33	330	8 \times 15	0.38	1.00	360	169	10 \times 12.5	0.42	1.10	293	166	
39	390	8 \times 20	0.33	0.89	490	202	10 \times 15	0.36	0.97	337	193	
47	470	10 \times 20	0.28	0.76	423	252	12.5 \times 15	0.31	0.84	402	239	
56	560	10 \times 20	0.24	0.65	620	274	12.5 \times 15	0.27	0.73	430	258	
68	680	10 \times 25	0.21	0.57	795	326	12.5 \times 15	0.23	0.62	466	289	
82	820	10 \times 31.5	0.18	0.49	606	386	16 \times 15	0.19	0.51	681	433	
100	101	10 \times 31.5	0.15	0.41	955	438	16 \times 15	0.17	0.46	719	475	
120	121	12.5 \times 25	0.13	0.35	1040	519	16 \times 15	0.14	0.38	793	531	
150	151	12.5 \times 25	0.11	0.30	798	553	18 \times 15	0.12	0.32	917	635	
180	181	12.5 \times 31.5	0.098	0.26	1270	641	16 \times 20	0.11	0.30	1240	706	
220	221	12.5 \times 35.5	0.087	0.23	1450	730	16 \times 25	0.093	0.25	1440	854	
270	271	12.5 \times 40	0.072	0.19	1610	843	18 \times 20	0.080	0.22	1450	918	
330	331	16 \times 31.5	0.062	0.17	1790	1160	18 \times 25	0.070	0.19	1650	1080	
390	391	16 \times 35.5	0.053	0.14	2000	1340	18 \times 31.5	0.062	0.17	1850	1240	
470	471	16 \times 40	0.047	0.13	2200	1530	18 \times 35.5	0.056	0.15	1970	1410	
560	561	18 \times 35.5	0.041	0.11	2250	1680						
680	681	18 \times 40	0.036	0.097	2300	1910						

※ In case of low profile type, [6] will be put at 12th digit of type numbering system.

ϕ D \times L (mm)

Cap.(μ F)	V(Code) Code	160		200		250		315		350		400		450	
		2C		2D		2E		2F		2V		2G		2W	
1	010	8 \times 11.5	19	8 \times 11.5	19	8 \times 11.5	19	8 \times 11.5	19	10 \times 12.5	21	10 \times 12.5	17	10 \times 15	17
2.2	2R2	8 \times 11.5	30	8 \times 11.5	30	10 \times 12.5	32	10 \times 12.5	32	10 \times 15	34	10 \times 15	28	10 \times 20	28
3.3	3R3	10 \times 12.5	50	10 \times 12.5	50	10 \times 15	52	10 \times 15	52	10 \times 20	54	10 \times 20	47	12.5 \times 20	48
4.7	4R7	10 \times 12.5	57	10 \times 15	60	10 \times 15	60	10 \times 20	65	10 \times 20	65	12.5 \times 20	55	12.5 \times 25	55
10	100	10 \times 15	90	10 \times 20	95	12.5 \times 20	98	12.5 \times 20	98	12.5 \times 25	100	12.5 \times 25	85	16 \times 25	90
22	220	12.5 \times 20	140	12.5 \times 25	145	16 \times 25	150	16 \times 25	150	16 \times 25	150	16 \times 31.5	130	16 \times 35.5	135
33	330	12.5 \times 25	175	16 \times 25	180	16 \times 25	180	16 \times 31.5	185	16 \times 35.5	190	18 \times 35.5	170	18 \times 40	170
47	470	16 \times 25	220	16 \times 25	220	16 \times 31.5	225	18 \times 35.5	235	18 \times 40	240				
100	101	16 \times 35.5	330	18 \times 40	345	18 \times 40	345							Case size	※

※ Rated Ripple (mA rms) at 105°C 120Hz