


4-8 Connector and Cable

The connector and the cable can be selected among the following two combinations as a standard.

(1) D-SUB25P, 2000 mm(78.8 in.) straight cable in entire length

- Connector : D-SUB25P(JST JBC-25P)
- Locking screw : M2.6
- Cable : 2000 mm(78.8 in.) straight cable in entire length
- Pin assignment :

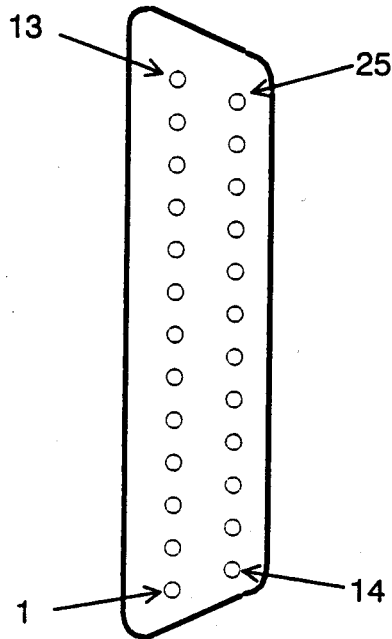


Pin No.	Terminal
1	No connection
2	$\overline{\text{TxD}}$ YELLOW
3	$\overline{\text{RxD}}$ BLUE
4	RTS ORANGE
5	CTS BROWN
6	No connection
7	SG(Signal GND) GREEN
8-15	No connection
16	5VDC RED
17-25	No connection

(Connector viewed from the pin side)

(2) D-SUB9S, 2500 mm(98.4 in.) straight cable in entire length

- Connector : D-SUB9S(JST JEC-9S)
- Locking screw : #4-40UNC
- Cable : 2500 mm(98.4 in.) straight cable in entire length
- Pin assignment :

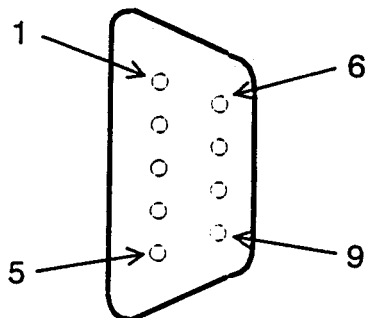

Pin No.	Terminal
1	No connection
2	$\overline{\text{TxD}}$
3	$\overline{\text{RxD}}$
4	CTS
5	SG(Signal GND)
6	RTS
7,8	Short circuit
9	5VDC
Housing	FG(Flame GND)

(Connector viewed from the pin side)