




Take power

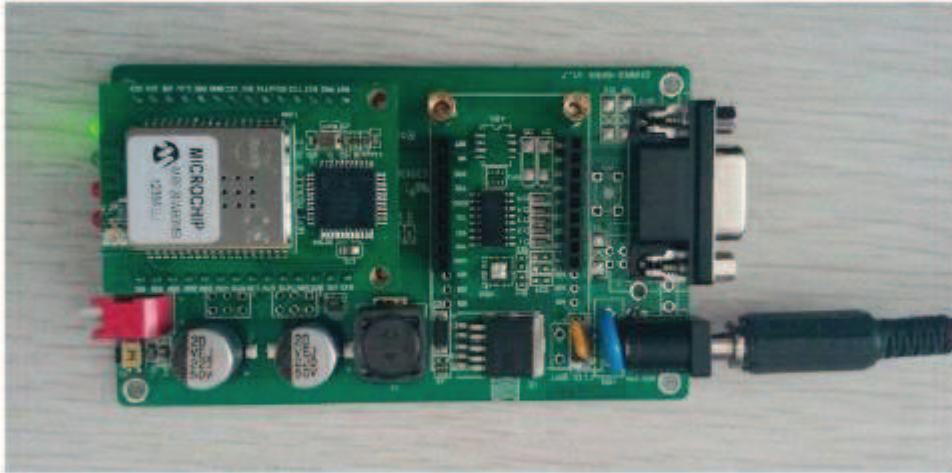

Connect the RS232 data wire

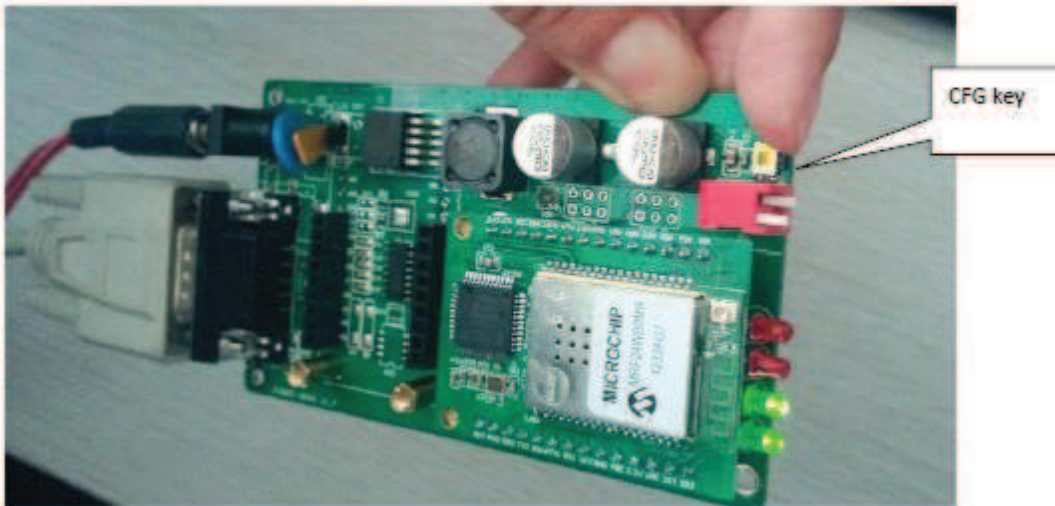

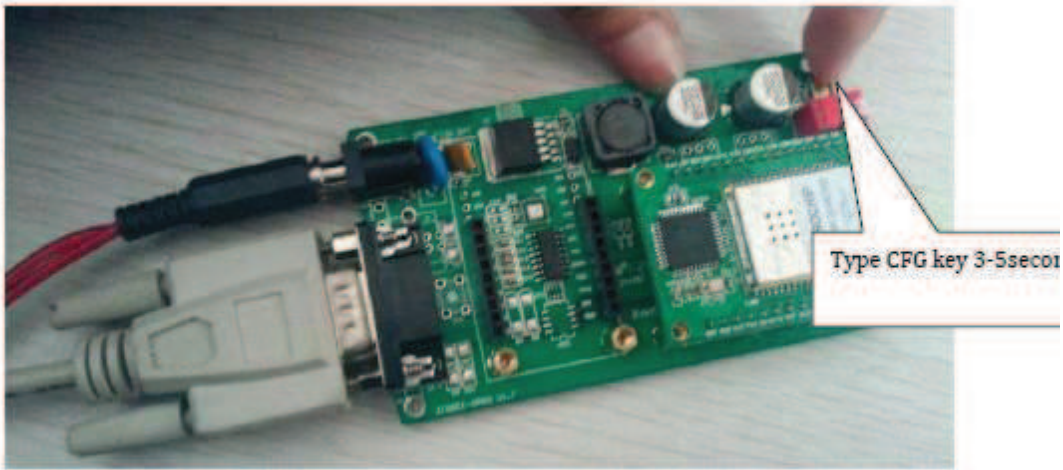

If you don't have the WIFI evaluation board, you can make the CFG pin connect the GND pin 3 Seconds (CFG pin active low)