


Feature

1. Built-in controller Samsung-(KS0107 · KS0108 or equivalent)
2. +5V power supply
3. 1/64 duty cycle
4. N.V Built-in

Pin NO.	Symbol	Function
1	Vdd	Power Supply(+5V)
2	GND	Power Supply(GND)
3	Vo	Contrast Adjustment
4	DB0	Data bus line
5	DB1	Data bus line
6	DB2	Data bus line
7	DB3	Data bus line
8	DB4	Data bus line
9	DB5	Data bus line
10	DB6	Data bus line
11	DB7	Data bus line
12	CS1	Chip select IC1
13	CS2	Chip select IC2
14	$\overline{\text{RST}}$	Reset signal
15	$\overline{\text{R/W}}$	Data read/write
16	D/I	Data /instruction
17	E	Enable signal
18	Vee	Negative Voltage output (+4.2V)
19	A	Power supply for LED
20	K	Power supply for LED (0V)

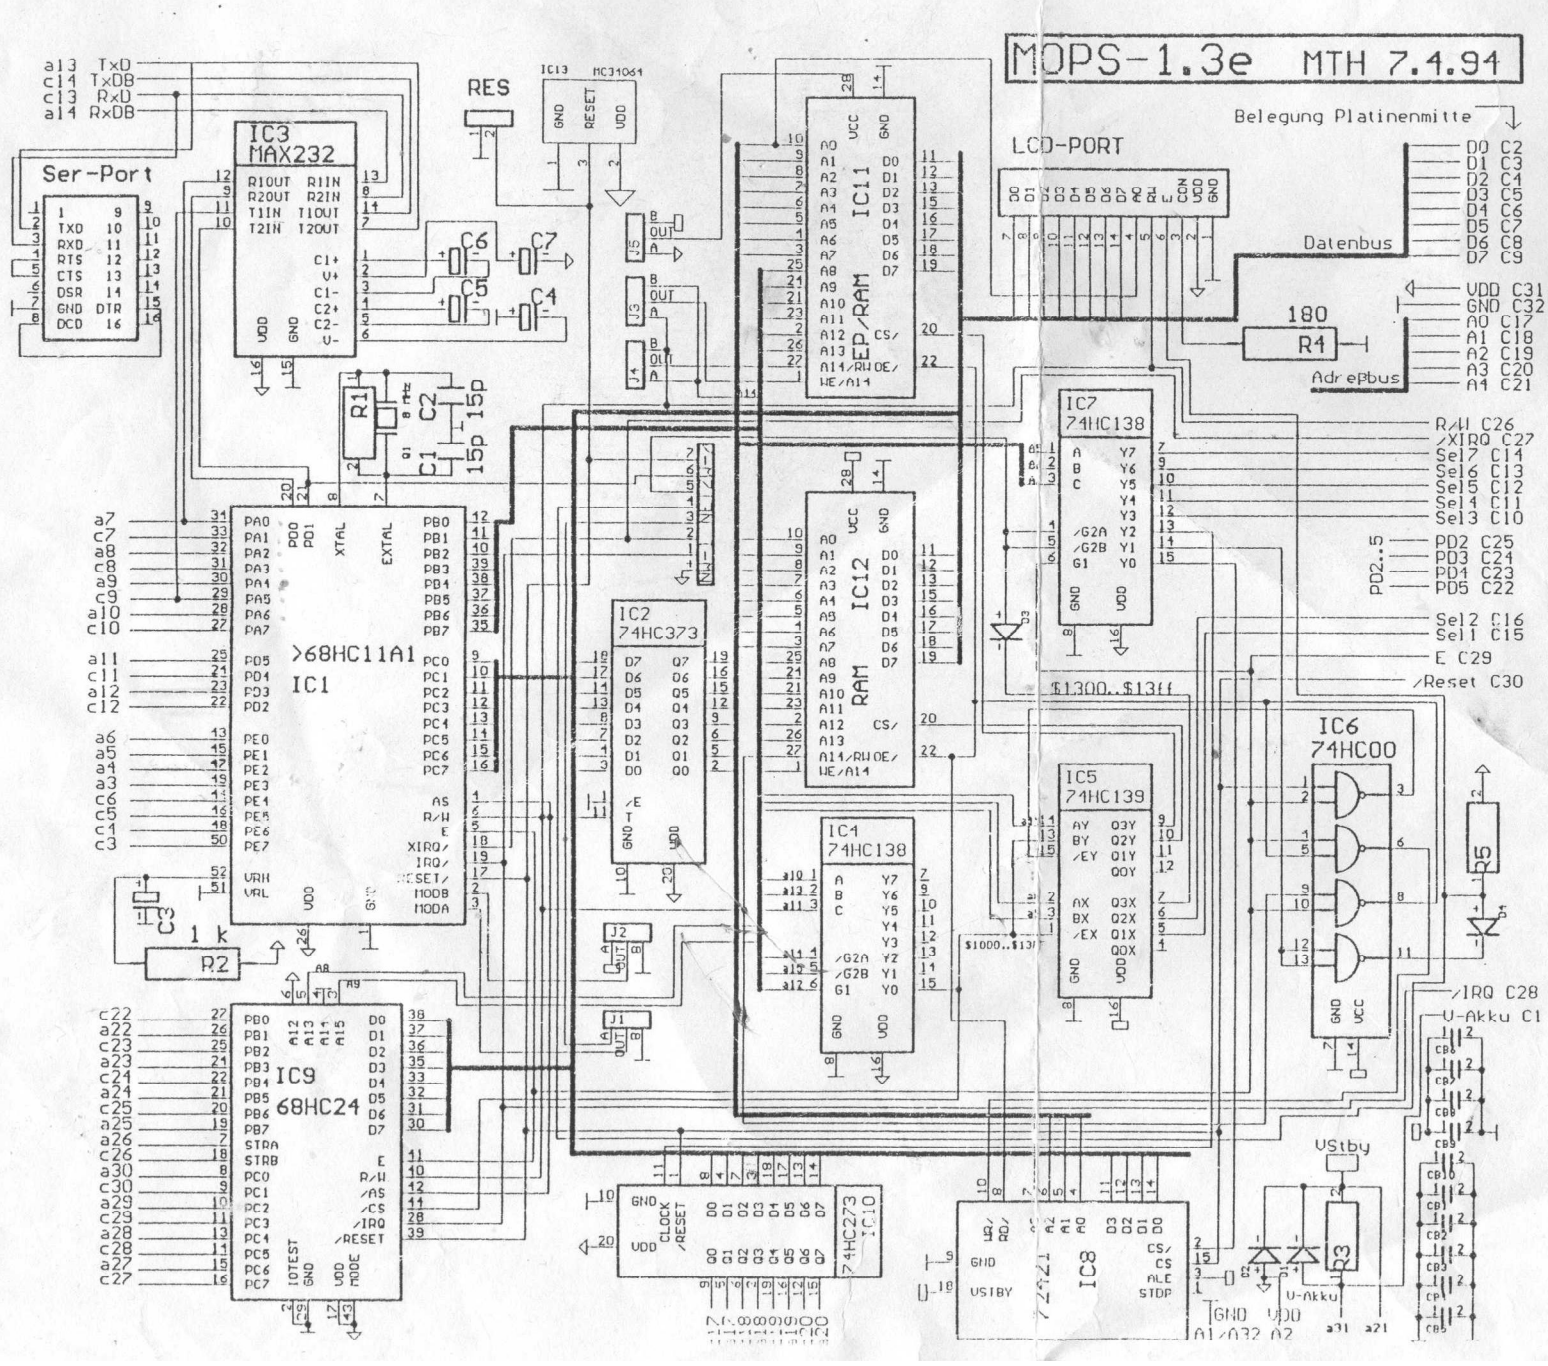

MOPS-1.3e MTH 7.4.94

Belegung Platinenmitte

- a13 TxD
- c14 TxDB
- c13 RxU
- a14 RxDB

