


Siemens TK9072288 LCD

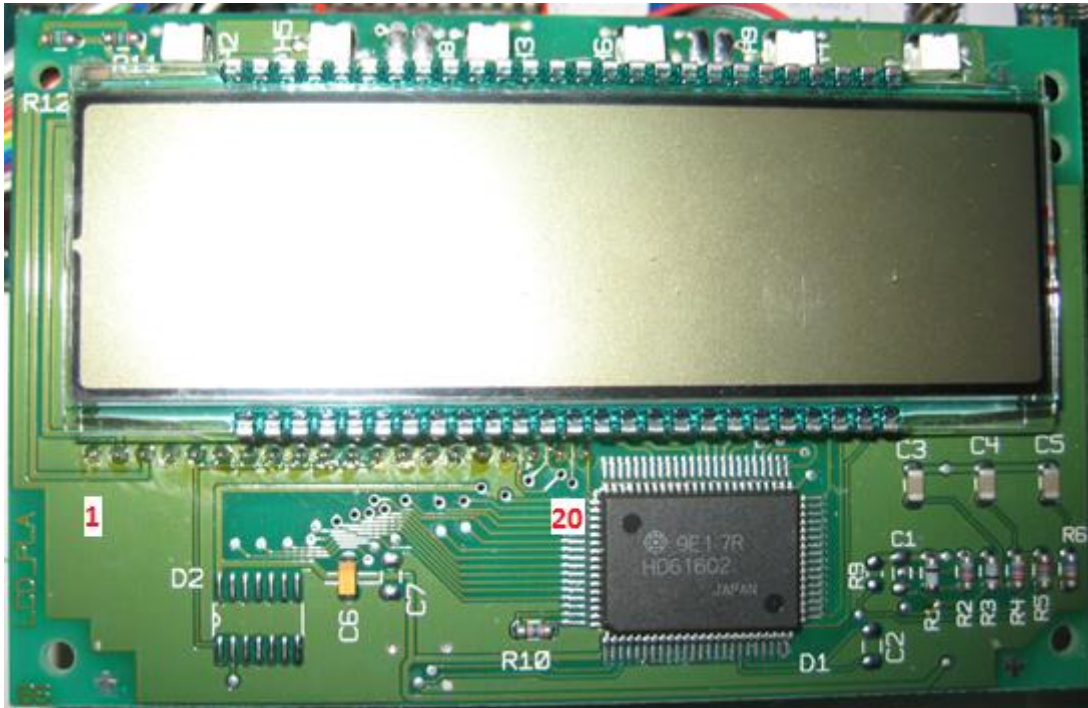

Pinheader at bottom, Pin numbering from top: see picture left (1) to right (20)

Hitachi HD61602R controller, LED BG Illumination (green)

Pin	Signal	Description
1	READY	HD61602 ready
2	BG LED -	≈ 15 V, 100 mA
3	BG LED +	
4	D7	HD61602 data bit 7
5	D6	HD61602 data bit 6
6	D5	HD61602 data bit 5
7	D4	HD61602 data bit 4
8	D3	HD61602 data bit 3
9	D2	HD61602 data bit 2
10	D1	HD61602 data bit 1
11	D0	HD61602 data bit 0
12		n.c.
13	/RE	HD61602 transfer reset
14	/WE	HD61602 write enable
15		n.c.
16	Vdd	+5 V
17	Vss	Gnd
18		n.c.
19		n.c.
20	/CS	HD61602 chip select