


## 9.2 Display connector

The display is provided with 2,65V from the ASIC (D361). The communication with the EGOLD+ by the LCD-Signals, directly connected to the EGOLD+

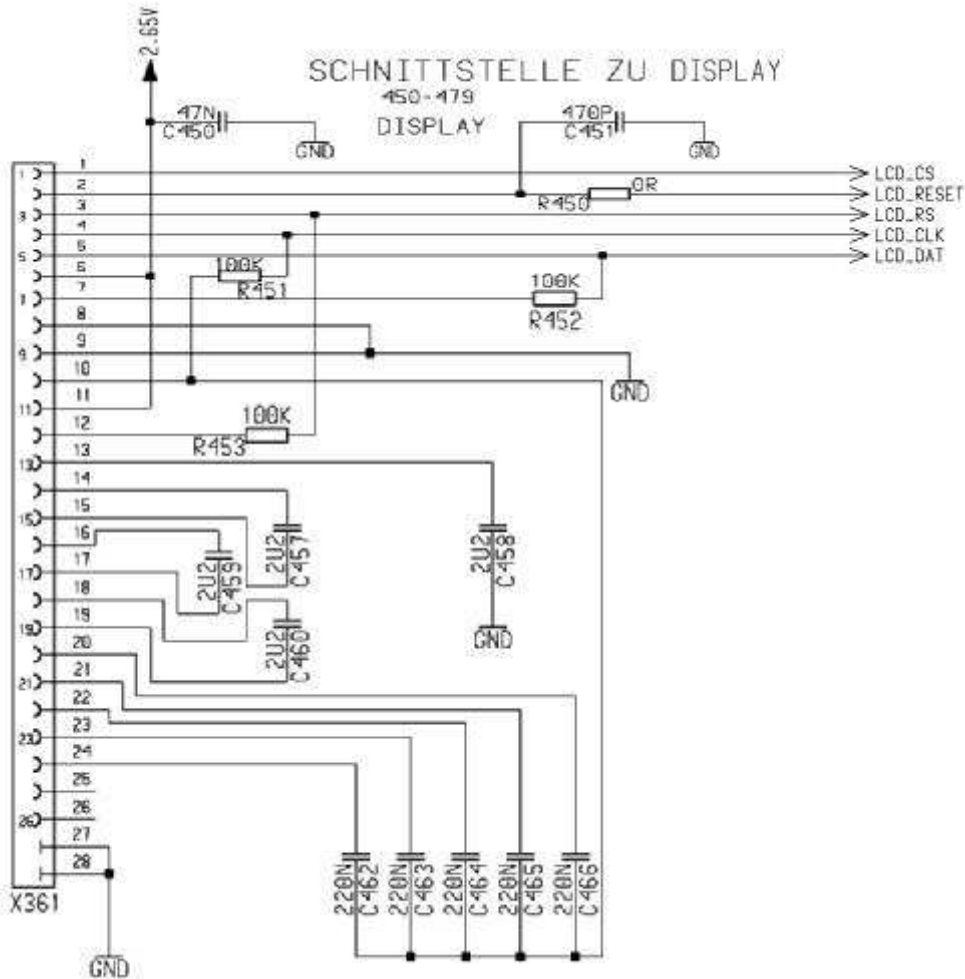

LCD_CS	SIM L9
LCD_RESET	Miscellaneous N7
LCD_RS	Serial-Interface R14
LCD_CLK	Serial-Interface P11
LCD_DAT	Serial-Interface N11