


TEQNA

7-May-09

10:12:53

- A: 2  
2  $\mu$ s  
5.0 V
- B: 3  
2  $\mu$ s  
5.0 V
- 2  
.1 ms  
5.0 V
- 3  
.1 ms  
5.0 V
- 1  
.1 ms  
10.0 V

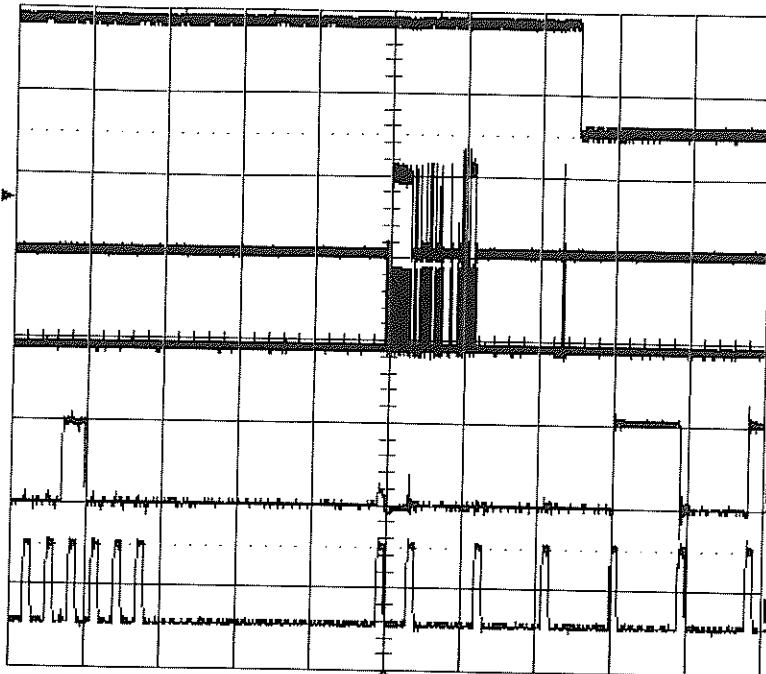

TRIGGER SETUP

Edge SMART

trigger on  
1 2 3 4 Ext  
Ext10 Line

coupling 2  
DC AC LFREJ  
HFREJ HF

slope 2  
Pos Neg

- 1 1 V DC X10
- 2 .5 V DC X10
- 3 .5 V DC X10
- 4 .2 V DC X10

2 DC 3.1 V

500 MS/s

holdoff

Time Evts

STOPPED