


One-dimensional PSD

S3979, S3931, S3932, S3270

3 to 37 mm resistance length PSD for precision distance measurement

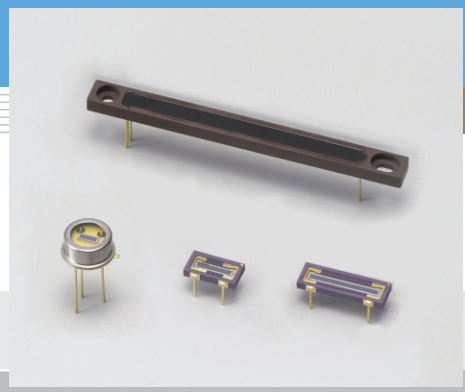

Hamamatsu provides various types of one-dimensional PSD (Position Sensitive Detector) designed for precision distance measurement such as displacement meters. S3979 has a 1 × 3 mm active area sealed in a TO-5 package.

S3931 and S3932 have an active area of 1 × 6 mm and 1 × 12 mm respectively, and are mounted on a compact ceramic package with a transparent resin window. Variant types (S3931-01, S3932-01) with a visible-cut resin window are also available.

S3270 offers an active area longer than 30 mm, allowing position detection at a long distance. S3270 has a visible-cut resin window, and S3270-01 with a transparent resin window is also available.

Features

- Superior position detection ability
- High reliability
- S3931, S3932: Easy to use 4-pin small ceramic package
- Long and narrow active area
S3270: 1 × 37 mm

Applications

- Displacement sensing
- Distance measurement
- Proximity switching

General ratings / Absolute maximum ratings

General ratings / Absolute maximum ratings						
Type No.	Package	Window material *1	Active area size (mm)	Absolute maximum ratings		
				Reverse voltage VR Max. (V)	Operating temperature Topr (°C)	Storage temperature Tstg (°C)
S3979	TO-5	K	1 × 3	20	-10 to +60	-20 to +80
S3931	Ceramic	R	1 × 6			
S3932		R	1 × 12			
S3270 *2		R (B)	1 × 37		-10 to +75	

Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)

Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λ_p (nm)	Photo sensitivity S $\lambda = \lambda_p$ (A/W)	Interelectrode resistance Rie Vb=0.1 V			Position detection error *3 E VR=5 V light spot ϕ 200 μ m		Saturation photocurrent *4 VR=5 V RL=1 k Ω (μ A)	Dark current ID VR=5 V		Temp. coefficient of ID TCID (times/°C)	Rise time tr VR=5 V RL=1 k Ω (μ s)	Terminal capacitance Ct VR=5 V f=10 kHz (pF)	Position resolution *5 (μ m)
				Min. (k Ω)	Typ. (k Ω)	Max. (k Ω)	Typ. (μ m)	Max. (μ m)		Typ. (nA)	Max. (nA)				
S3979	320 to 1100	920	0.55	100	140	180	±15	±60	40	0.1	5	1.15	2.5	20	0.1
S3931				30	50	80	±30	±120	100	0.15	10		1.5	40	0.2
S3932							±60	±240		0.2	20		3.0	80	0.3
S3270	700 to 1100	960	0.55	10	15	20	±100	±400	300	0.5	20		1.0	100	2.8

*1: K: borosilicate glass, R: clear resin coating, R (B): visible-cut resin coating.

*2: Works with microscopic spot light detection.

*3: A range of 75 % of that from the center of the photosensitive surface to the edge.

*4: The upper limit of linearity of photocurrent in response to the quantity of light is defined as the point where the linearity deviates by 10 %.

*5: Position resolution

This is the minimum detectable light spot displacement. The detection limit is indicated by the distance on the photosensitive surface. The numerical value of the resolution of a position sensor using a PSD is proportional to both the length of the PSD and the noise of the measuring system (resolution deteriorates) and inversely proportional to the photocurrent (incident energy) of the PSD (resolution improves).

Light source: LED (900 nm)

Spot light size: ϕ 200 μ m

Frequency range: 1 kHz

Photocurrent: 1 μ A

Circuit system input noise: 1 μ V (1 kHz)

Interelectrode resistance: Typical value (refer to the specification table)

SOLID STATE DIVISION

Spectral response



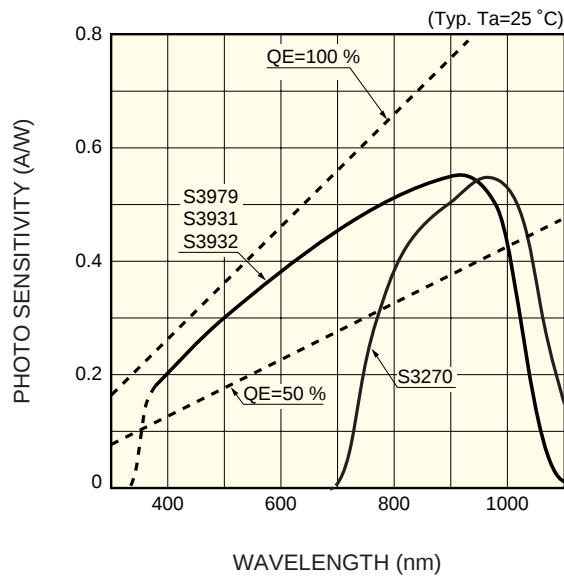



Photo sensitivity temperature characteristics

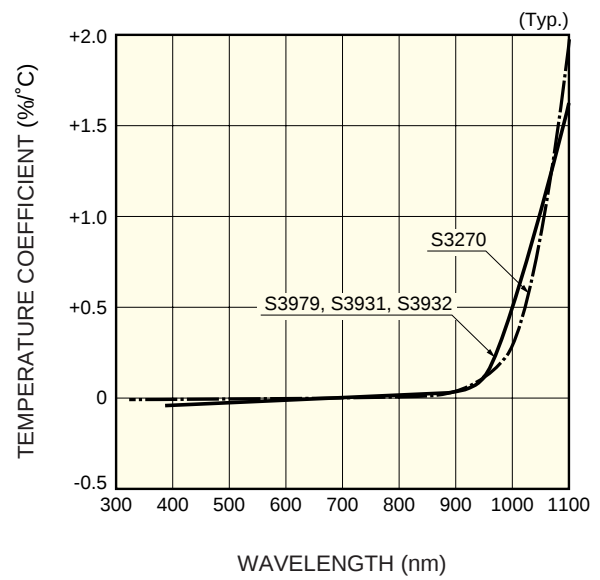





Dark current vs. reverse voltage

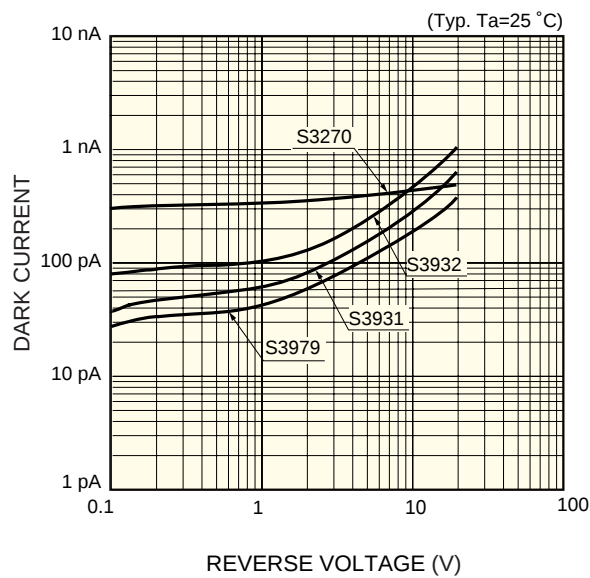

Terminal capacitance vs. reverse voltage

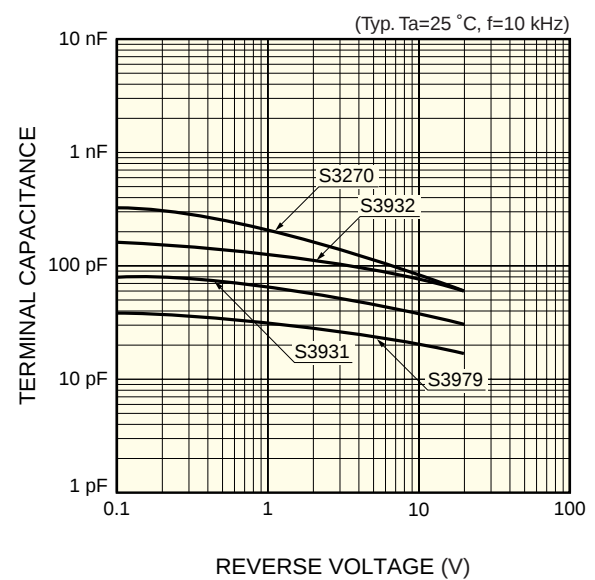


■ Example of position detectability ($T_a=25\text{ }^{\circ}\text{C}$, $\lambda=900\text{ nm}$, spot light size: $\phi 0.2\text{ mm}$)

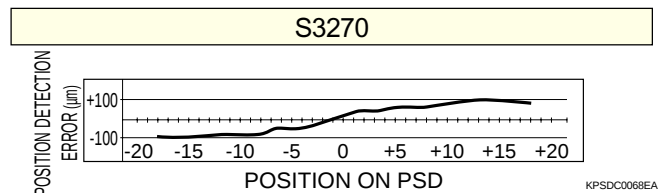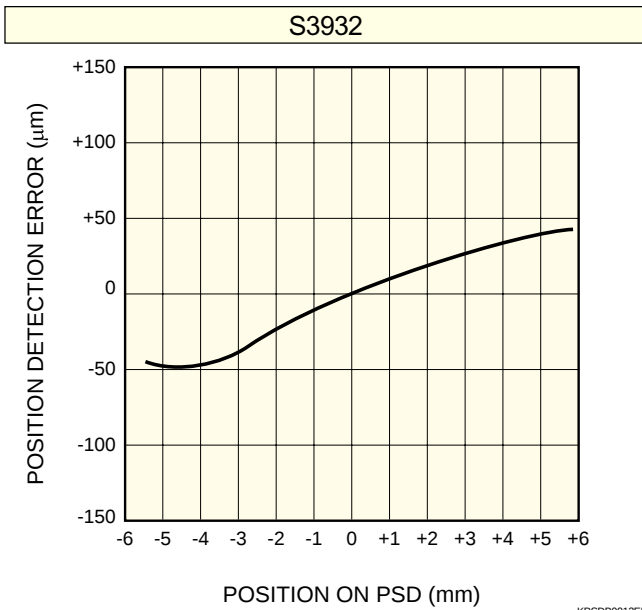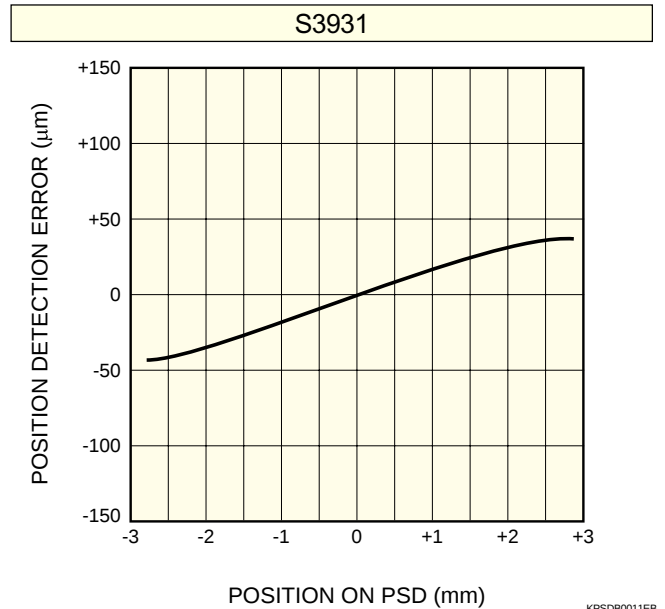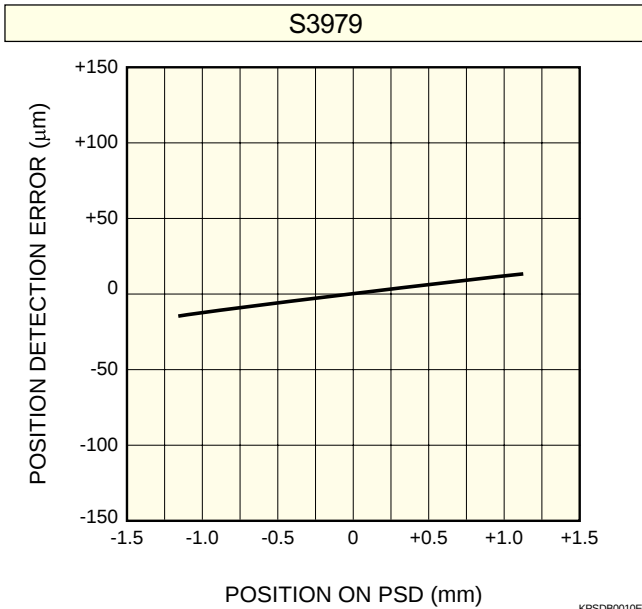

■ Conversion formula of spot light position on the PSD

If output signals (photocurrent) I_1 and I_2 are obtained from electrodes X_1 and X_2 , then the light spot position (x) on the PSD can be found by the following formula.

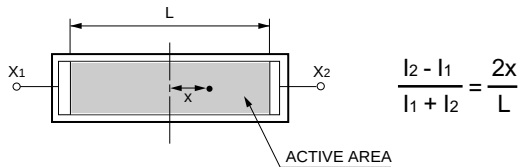


■ Correction for position detection error

Position detection characteristics obtained by the above formula can be corrected to reduce position detection errors. For example, the maximum position detection error ($\pm 120\text{ }\mu\text{m}$) of S3931 can be significantly reduced to $\pm 9\text{ }\mu\text{m}$ by using the least square method.


■ Dimensional outlines (unit: mm)

S3979

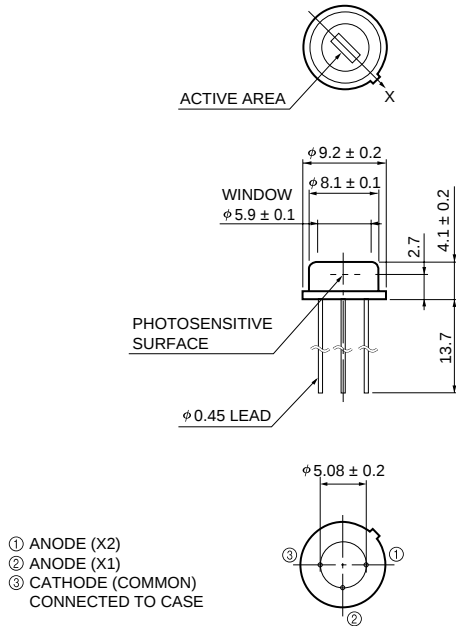


KPSDA0007EC

S3931

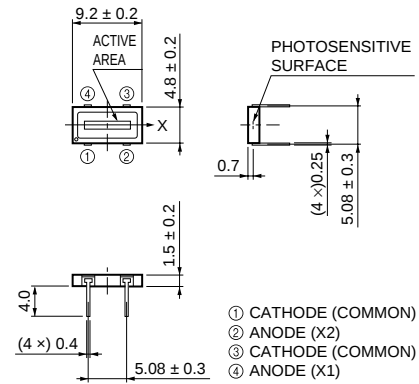


KPSDA0048EA

S3932

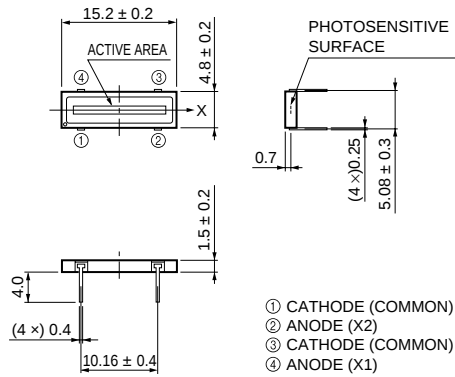

KPSDA0049EA

S3270

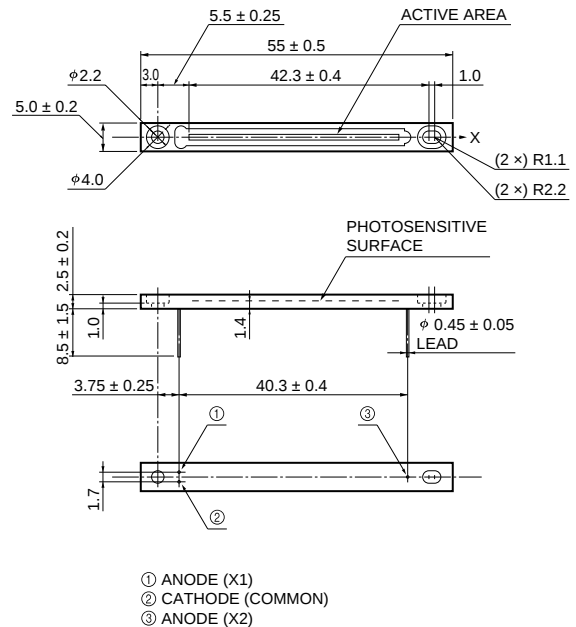

KPSDA0050EA

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH, Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trappu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited, 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB, Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2007 Hamamatsu Photonics K.K.