

Ceramic Capacitors


HF Feed Through Radial

HFC Series HFC-2L-3 Type

FEATURES

- Effectively suppresses noise radiation over a wide frequency range.
- Excellent high-frequency characteristics.
- Compact and lightweight.
- Flame retardant (equivalent to UL94V-1).

SHAPES AND DIMENSIONS

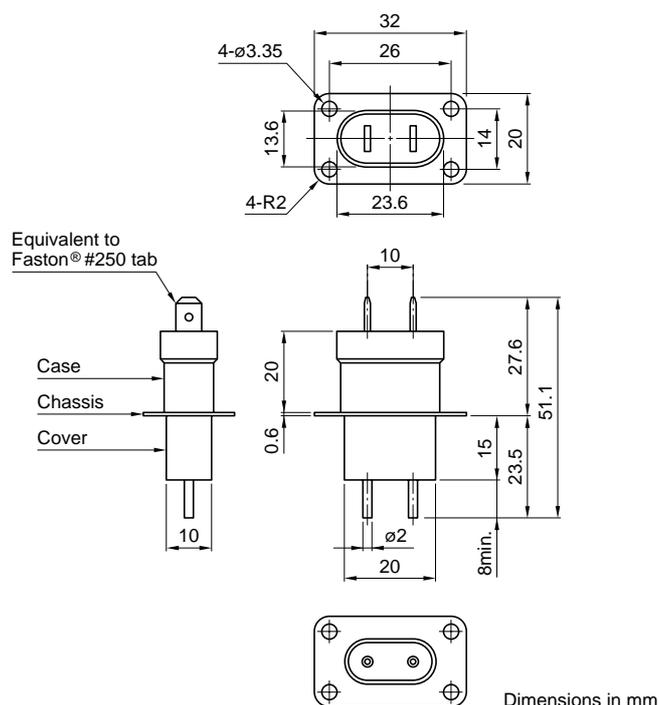


•Faston® is a registered trademark of AMP Incorporated.



CHARACTERISTICS

Rated voltage E _{dc}	10kV
Withstand voltage E _{rms}	10kV[50Hz, 1min]
Initial insulation resistance	10000M Ω min.
Rated capacitance and tolerance	500pF \pm 35%[1V, 1kHz]
tan δ	1% max.
Capacitance temperature characteristics	E(+20, -55%)
Operating temperature range	-30 to +120°C

FREQUENCY CHARACTERISTICS

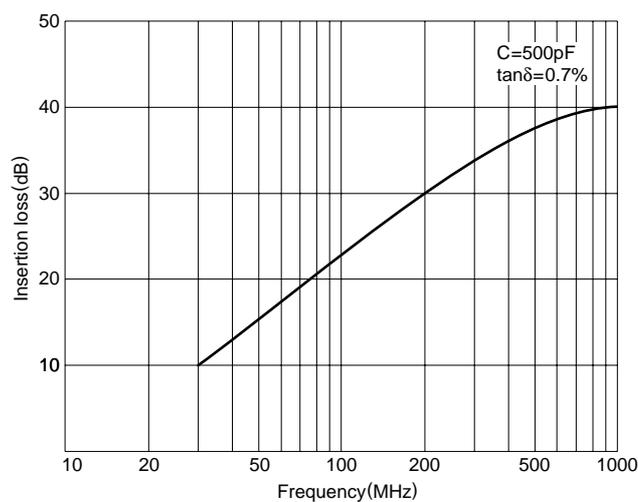

- For more information about products with other capacitance or other data, please contact us.

Specifications which provide more details for the proper and safe use of the described product are available upon request. All specifications are subject to change without notice.