


## Thin Film Microwave Resistors




### FEATURES

- Small size, down to 20 by 16 mils
- Edged trimmed block resistors
- Pure alumina substrate (99.5 %)
- Various terminations:
  - Pre-tinned over Nickel Barrier (wraparound or flip chip) for solder reflow
  - Gold pad for wire (or ribbon) bonding
- Ohmic range: 10R to 500R
- Small internal reactance (LC down to  $1 \times 10^{-24}$ )
- Tolerance 1 %, 5 %, 10 %
- TCR: 100 ppm/°C in (- 55 °C, + 155 °C) temperature range

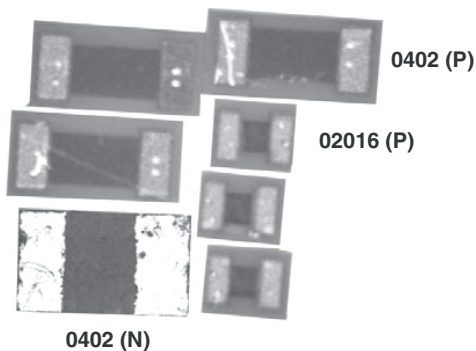

Those miniaturized components are designed in such a way that their internal reactance is very small. When correctly mounted and utilized, they function as almost pure resistors on a very large range of frequency, up to 20 GHz.


### DIMENSIONS in millimeters [inches]

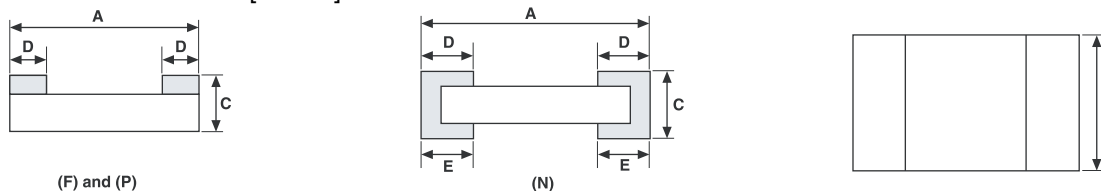


CASE SIZE MAX. TOL. + 0.1 (0.004) MIN. TOL. - 0.1 (0.004)	DIMENSIONS				POWER RATING Pn mW	LIMITING ELEMENT VOLTAGE V
	A	B	C	D/E		
	MAX. TOL. + 0.1 (0.004) MIN. TOL. - 0.1 (- 0.004)	MAX. TOL. + 0.1 (0.004) MIN. TOL. - 0.1 (- 0.004)	MAX. TOL. + 0.127 (0.005) MIN. TOL. - 0.127 (- 0.005)	MAX. TOL. + 0.13 (0.005) MIN. TOL. - 0.13 (- 0.005)		
02016	0.5 (0.020)	0.4 (0.016)	0.5 (0.02)	0.15 (0.006)	30	30
0402	1.00 (0.040)	0.6 (0.023)	0.5 (0.02)	0.38 (0.015)	50	37
0505	1.27 (0.050)	1.27 (0.050)	0.5 (0.02)	0.38 (0.015)	125	50
0603	1.52 (0.060)	0.75 (0.030)	0.5 (0.02)	0.38 (0.015)	125	50
0705/0805	1.91 (0.075)	1.27 (0.050)	0.5 (0.02)	0.38 (0.015)	200	50
1005	2.54 (0.100)	1.27 (0.050)	0.5 (0.02)	0.38 (0.015)	250	75
1206	3.00 (0.126)	1.60 (0.063)	0.5 (0.02)	0.38 (0.015)	330	75

### GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: CH0402-50RJP\* (preferred part number format)

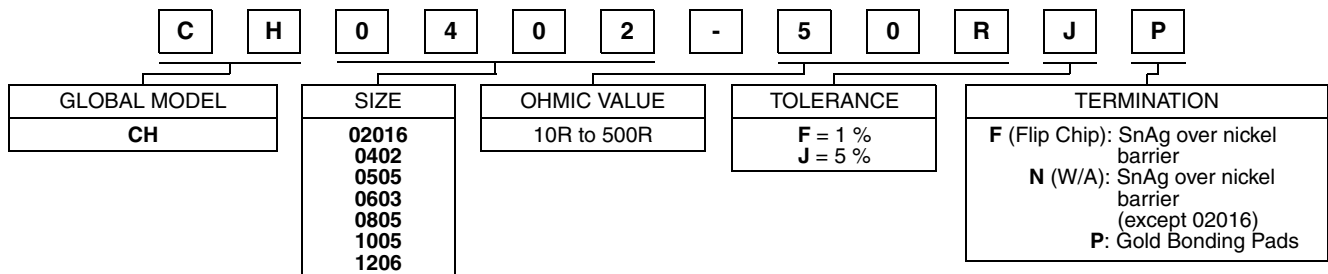


Historical Part Number example: CH 0402 50R 5% P (will continue to be accepted)



\* 02016 Not available with N termination - Tape option: Except P termination

**TYPICAL HIGH FREQUENCY PERFORMANCE ELECTRICAL MODEL**

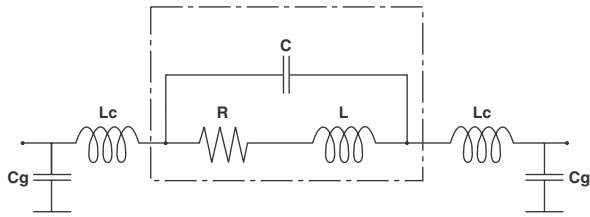

- C:** Internal shunt capacitance
- L:** Internal inductance
- R:** Resistance
- Lc:** External connection inductance
- Cg:** External capacitance to ground

The complex impedance of the chip resistor is given by the following equations:

$$Z = R \frac{1 + j X_L/R}{1 + j R/X_C} \quad \text{with } X_L = 2\pi fL: \text{ Reactance of the internal inductance}$$

$$\theta = \text{Arc tg} \frac{X_L (X_C + X_L) + R^2}{R X_C} \quad \text{with } X_C = 1/2\pi fC: \text{ Reactance of the internal capacitance}$$


$$|Z| = R \left[ \frac{1 + (X_L/R)^2}{1 + (R/X_C)^2} \right]^{1/2} \quad f = \text{frequency}$$

The resistor is purely resistive when  $R = (L/C)^{1/2} = Z_0$ . The smaller the LC product the greater the frequency range over which the resistor looks approximately resistive.


This can be seen on the graphs relevant to 02016 ( $R = 100 \Omega$ ,  $LC = 1 \times 10^{-24}$ ), 0402 ( $R = 129 \Omega$ ,  $LC = 15 \times 10^{-24}$ ) and 1206 ( $R = 200 \Omega$ ,  $LC = 100 \times 10^{-24}$ ).

**Note:** The external reactance ( $L_c$  and  $C_g$ ) depends on the PCB material, the layout and assembly technology. It does affect the HF performance and needs to be estimated. The external reactance can be utilized to compensate the internal one.


**INTERNAL IMPEDANCE CURVE FOR 02016 SIZE (R017 BARE CHIPS)**

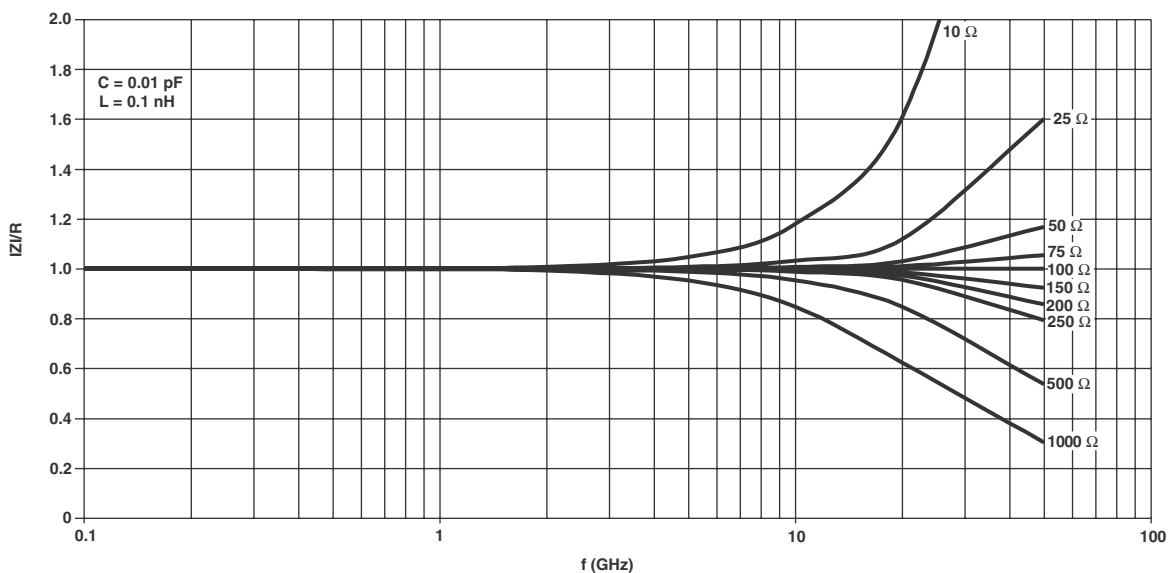

**INTERNAL IMPEDANCE CURVE FOR 0402 SIZE (R017 W/A)**

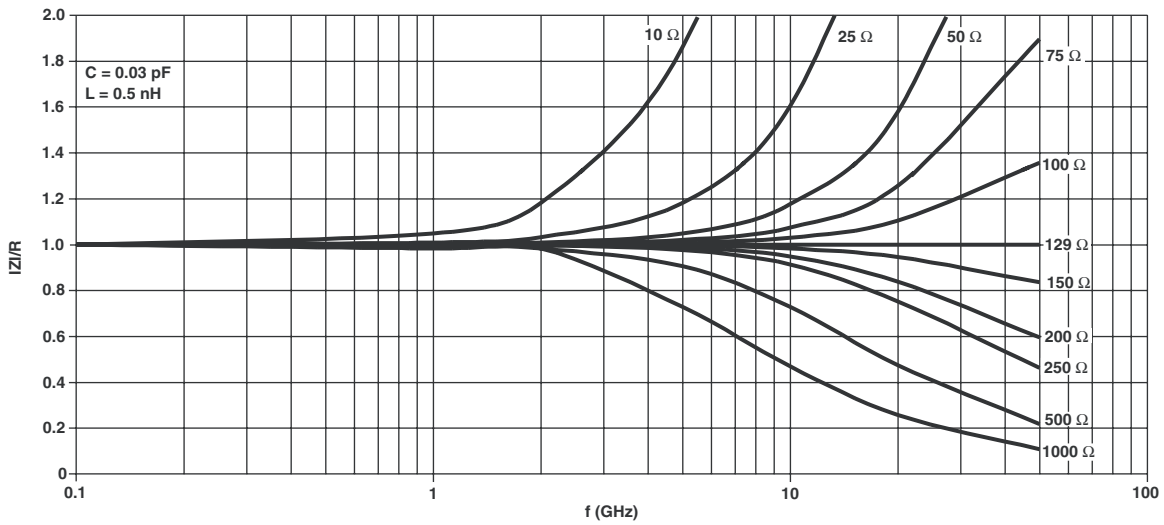

**INTERNAL IMPEDANCE CURVE FOR 1206 SIZE (R017 W/A)**

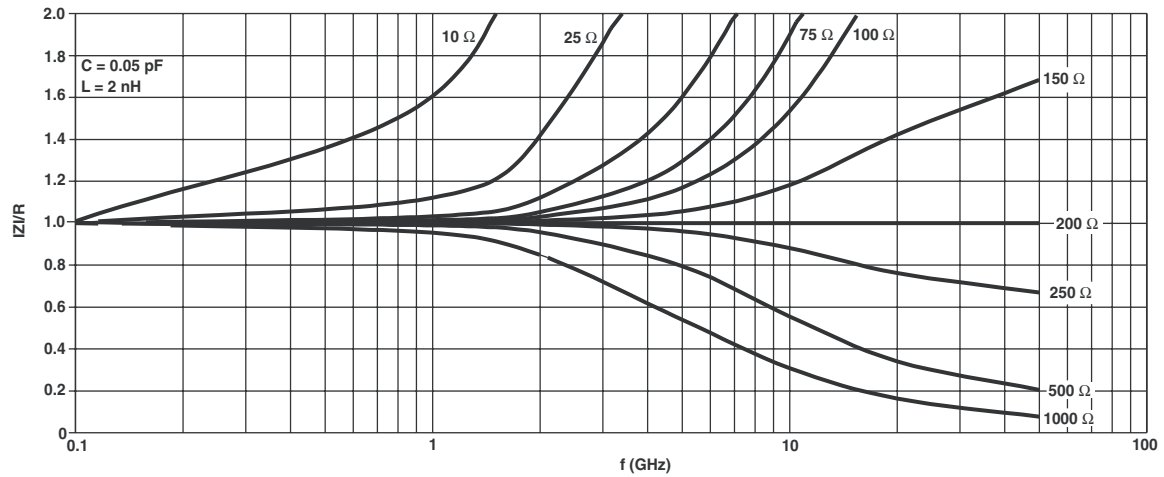



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.