

Specification	AXIOM75	Issue: 03	Date: 2009-08-28
----------------------	----------------	-----------	------------------

Oscillator type : OCXO with Sine Wave Output, Low Phase Noise

Parameter	min.	typ.	max.	Unit	Condition
Frequency Range	10		125		
Standard frequencies	10.000 / 12.800 / 100.000			MHz	
Frequency stability					
Initial tolerance at delivery			± 500	ppb	@+25°C @ V _C = 2.5 V
vs. temperature in operating temperature range			± 200 ± 100 ± 50 ± 25 ± 10	ppb ppb ppb ppb ppb	Option II = "200" Option II = "100" Option II = "50" Option II = "25" Option II = "10"
operating temperature range	-10		+60	°C	Note 2
vs. supply voltage variation			± 10	ppb	V _S ± 5%
vs. load change			± 5	ppb	R _L ± 5%
Long term (aging) per day, after 30 days operation		± 5 ± 1	± 10 ± 2	ppb ppb	Option II="200", "100" Option II="50", "25", "10"
long term (aging) 1 st year, after 30 days operation			± 200 ± 100	ppb ppb	Option II="200", "100" Option II="50", "25", "10"
Frequency adjustment range					
Electronic Frequency Control (EFC) range	± 3 ± 0.8	± 1		ppm ppm	Option II = "200", "100" Option II="50", "25", "10"
EFC voltage V _C	0.25		4.75	V	
EFC slope (Δf / ΔV _C)	positive				
EFC input impedance	100			kΩ	
RF output					
Signal waveform	Sine wave				R _L = 50 Ω
Output level	+ 7			dBm	
Harmonics			-30	dBc	
Spurious			-90	dBc	
Warm-up time			5	min	Δf _{final} /f ₀ < ±0.1 ppm
Phase noise @ 10.000 MHz		-140 -150 -155 -160		dBc/Hz dBc/Hz dBc/Hz dBc/Hz	@ 100 Hz @ 1kHz @ 10 kHz @ 100 kHz
Reference voltage VREF output (Note 3)		3.0 5.0		V V	Option I = "50" Option I = "12"
Supply voltage V_S	4.75 11.4	5.0 12	5.25 12.6	V V	Option I = "50" Option I = "12"
Current consumption (steady state) @ +25°C			250 100	mA mA	Option I = "50" Option I = "12"
Current consumption (warm-up)			600 250	mA mA	Option I = "50" Option I = "12"
Operable temperature range	-20		+70	°C	
Storage temperature range	-40		+85	°C	
Enclosure (see drawing) (LxWxH)	25.8x25.8x12.7max.			mm	
Weight			10	gram	
Handling and Testing	In accordance with AXAN-011				www.axtal.com
Processing	In accordance with AXAN-012				www.axtal.com


Notes:

1. Terminology and test conditions are according to IEC standard IEC60679-1, unless otherwise stated
2. Other operating temperature range on request
3. Other reference voltage on request

Ordering Code:

Model (Specification)	Option I	Option II	Frequency [MHz]
AXIOM75	12	25	10.000

Enclosure drawing

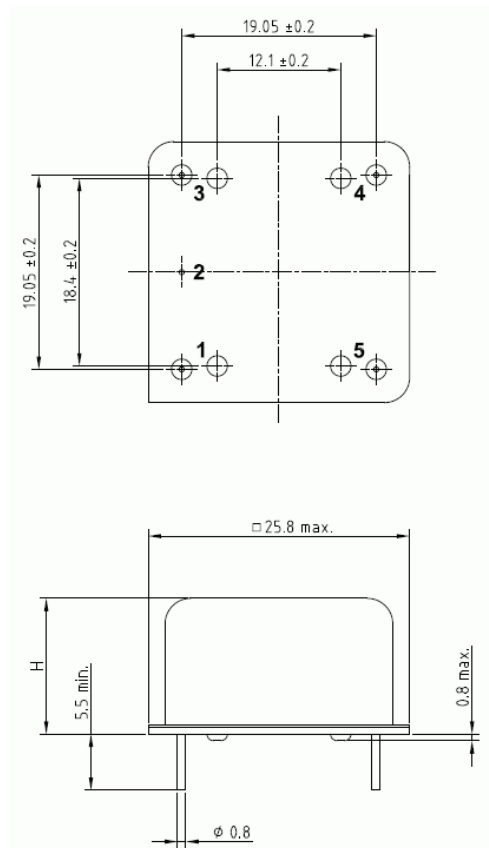

Pin connections

Pin #	Symbol	Function
1	RF OUT	RF Output
2	GND	Ground, case
3	V _C	Control Voltage (EFC)
4	VREF	Reference Voltage
5	V _S	Supply Voltage

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions
Sealing tests (if applicable)	2-17	4.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability Resistance to soldering heat	2-20 2-58	4.6.3	Test Ta (235 ± 5)°C Method 1 Test Tb Method 1A, 5s
Shock*	2-27	4.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Vibration, sinusoidal*	2-6	4.6.7	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Endurance tests - ageing - extended aging		4.7.1 4.7.2	30 days @ 85°C, OCXO @ 25°C 1000h, 2000h, 8000h @ 85°C