


- High-Resolution Conversion of Light Intensity to Frequency With No External Components
- Programmable Sensitivity and Full-Scale Output Frequency
- Communicates Directly With a Microcontroller
- Single-Supply Operation Down to 2.7 V, With Power-Down Feature
- Absolute Output Frequency Tolerance of  $\pm 5\%$  (TSL230B)
- Nonlinearity Error Typically 0.2% at 100 kHz
- Stable 100 ppm/°C Temperature Coefficient



## Description

The TSL230, TSL230A, and TSL230B programmable light-to-frequency converters combine a configurable silicon photodiode and a current-to-frequency converter on single monolithic CMOS integrated circuits. The output can be either a pulse train or a square wave (50% duty cycle) with frequency directly proportional to light intensity. Device sensitivity is selectable in three ranges, providing two decades of adjustment. The full-scale output frequency can be scaled by one of four preset values. All inputs and the output are TTL compatible, allowing direct two-way communication with a microcontroller for programming and output interface. An output enable ( $\overline{OE}$ ) is provided that places the output in the high-impedance state for multiple-unit sharing of a microcontroller input line. The devices are available with absolute-output-frequency tolerances of  $\pm 5\%$  (TSL230B),  $\pm 10\%$  (TSL230A), or  $\pm 20\%$  (TSL230). Each circuit has been temperature compensated for the ultraviolet-to-visible-light range of 300 nm to 700 nm and are characterized for operation over the temperature range of  $-25^\circ\text{C}$  to  $70^\circ\text{C}$ .

### Terminal Functions

TERMINAL NAME	NO.	I/O	DESCRIPTION
GND	4		Ground
$\overline{OE}$	3	I	Enable for $f_O$ (active low)
OUT	6	O	Scaled-frequency ( $f_O$ ) output
S0, S1	1, 2	I	Sensitivity-select inputs
S2, S3	7, 8	I	$f_O$ scaling-select inputs
$V_{DD}$	5		Supply voltage


### Selectable Options

S1	S0	SENSITIVITY	S3	S2	$f_O$ SCALING (divide-by)
L	L	Power Down	L	L	1
L	H	1x	L	H	2
H	L	10x	H	L	10
H	H	100x	H	H	100

# TSL230, TSL230A, TSL230B PROGRAMMABLE LIGHT-TO-FREQUENCY CONVERTERS

TAOS004 – MAY 1999

## Functional Block Diagram

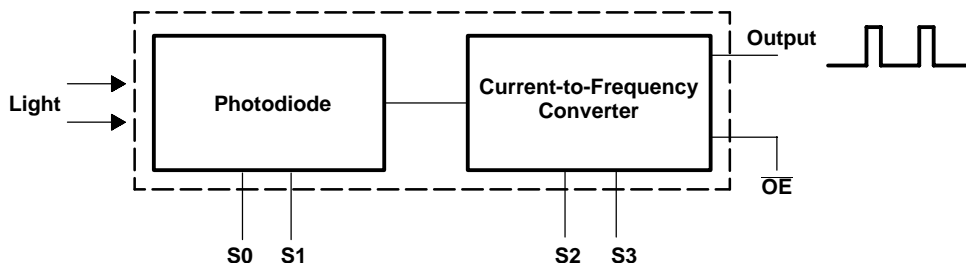

## Absolute Maximum Ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, $V_{DD}$ (see Note 1)	6.5 V
Input voltage range, all inputs, $V_I$	-0.3 V to $V_{DD} + 0.3$ V
Operating free-air temperature range, $T_A$	-25°C to 70°C
Storage temperature range	-25°C to 85°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to GND.

## Recommended Operating Conditions

		MIN	NOM	MAX	UNIT
Supply voltage, $V_{DD}$		2.7	5	6	V
High-level input voltage, $V_{IH}$	$V_{DD} = 4.5$ V to 5.5 V	2		$V_{DD}$	V
Low-level input voltage, $V_{IL}$	$V_{DD} = 4.5$ V to 5.5 V	0		0.8	V
Operating free-air temperature range, $T_A$		-25		70	°C

# TSL230, TSL230A, TSL230B PROGRAMMABLE LIGHT-TO-FREQUENCY CONVERTERS

TAOS004 – MAY 1999

## Electrical Characteristics at $T_A = 25^\circ\text{C}$ , $V_{DD} = 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{OH}$	High-level output voltage	$I_{OH} = -4\text{ mA}$	4	4.3		V
$V_{OL}$	Low-level output voltage	$I_{OL} = 4\text{ mA}$		0.17	0.26	V
$I_{IH}$	High-level input current				1	$\mu\text{A}$
$I_{IL}$	Low-level input current				1	$\mu\text{A}$
$I_{DD}$	Supply current	Power-on mode		2	3	mA
		Power-down mode			10	$\mu\text{A}$
	Full-scale frequency <sup>†</sup>		1.1			MHz
	Temperature coefficient of output frequency	$\lambda \leq 700\text{ nm}$ , $-25^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$		$\pm 100$		ppm/ $^\circ\text{C}$
$k_{SVS}$	Supply voltage sensitivity	$V_{DD} = 5\text{ V} \pm 10\%$		0.5		%/V

## Operating Characteristics at $V_{DD} = 5\text{ V}$ , $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TSL230			TSL230A			TSL230B			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
$f_O$ Output frequency	$S0 = H$ , $S1 = S2 = S3 = L$ , $E_e = 130\text{ mW/cm}^2$ , $\lambda_p = 670\text{ nm}$	0.8	1	1.2	0.9	1	1.1	0.95	1	1.05	MHz
	$E_e = 0$ , $S0 = H$ , $S1 = S2 = S3 = L$		0.1	10		0.1	10		0.1	10	Hz
	$S1 = H$ , $S0 = S2 = S3 = L$ , $E_e = 13\text{ mW/cm}^2$ , $\lambda_p = 670\text{ nm}$	0.8	1	1.2	0.9	1	1.1	0.95	1	1.05	MHz
	$E_e = 0$ $S1 = H$ , $S0 = S2 = S3 = L$		0.13	10		0.13	10		0.13	10	Hz
	$S0 = S1 = H$ , $S2 = S3 = L$ , $E_e = 1.3\text{ mW/cm}^2$ , $\lambda_p = 670\text{ nm}$	0.8	1	1.2	0.9	1	1.1	0.95	1	1.05	MHz
	$E_e = 0$ , $S0 = S1 = H$ , $S2 = S3 = L$		0.5	10		0.5	10		0.5	10	Hz
$t_w$ Output pulse duration	$S2 = S3 = L$	125		550	125		550	125		550	ns
	$S2$ or $S3 = H$		$1/2f_O$			$1/2f_O$			$1/2f_O$		s
Nonlinearity <sup>‡</sup>	$f_O = 0\text{ MHz to }10\text{ kHz}$	$\pm 0.1\%$			$\pm 0.1\%$			$\pm 0.1\%$			%F.S.
	$f_O = 0\text{ MHz to }100\text{ kHz}$	$\pm 0.2\%$			$\pm 0.2\%$			$\pm 0.2\%$			%F.S.
	$f_O = 0\text{ MHz to }1\text{ MHz}$	$\pm 0.5\%$			$\pm 0.5\%$			$\pm 0.5\%$			%F.S.
Recovery from power down			100			100			100	$\mu\text{s}$	
Step response to full-scale step input		1 pulse of new frequency plus $1\text{ }\mu\text{s}$									
Response time to programming change		2 periods of new principal frequency plus $1\text{ }\mu\text{s}^{\S}$									
Response time to output enable ( $\overline{OE}$ )			50	150		50	150		50	150	ns

<sup>†</sup> Full-scale frequency is the maximum operating frequency of the device without saturation.

<sup>‡</sup> Nonlinearity is defined as the deviation of  $f_O$  from a straight line between zero and full scale, expressed as a percent of full scale.

<sup>§</sup> Principal frequency is the internal oscillator frequency, equivalent to divide-by-1 output selection.

# TSL230, TSL230A, TSL230B PROGRAMMABLE LIGHT-TO-FREQUENCY CONVERTERS

TAOS004 – MAY 1999

## TYPICAL CHARACTERISTICS

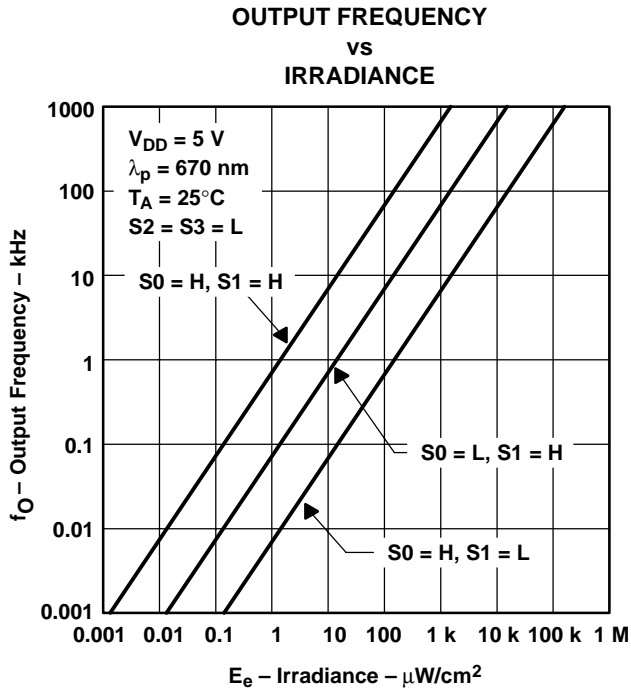


Figure 1

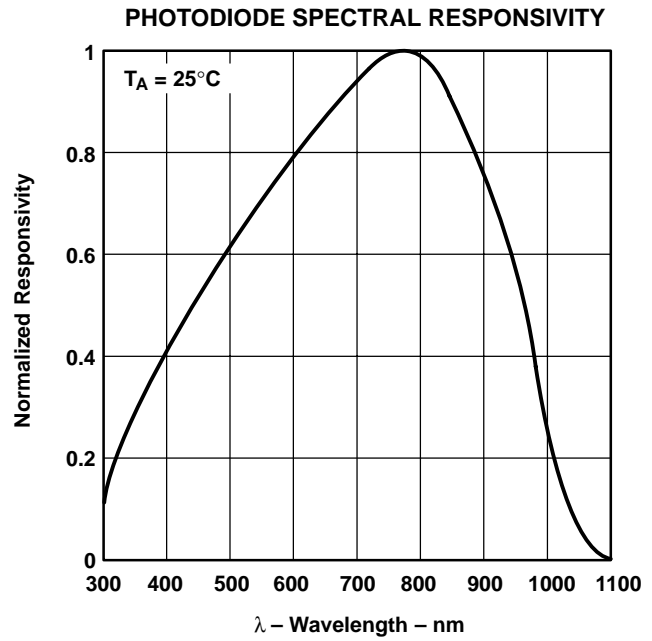


Figure 2

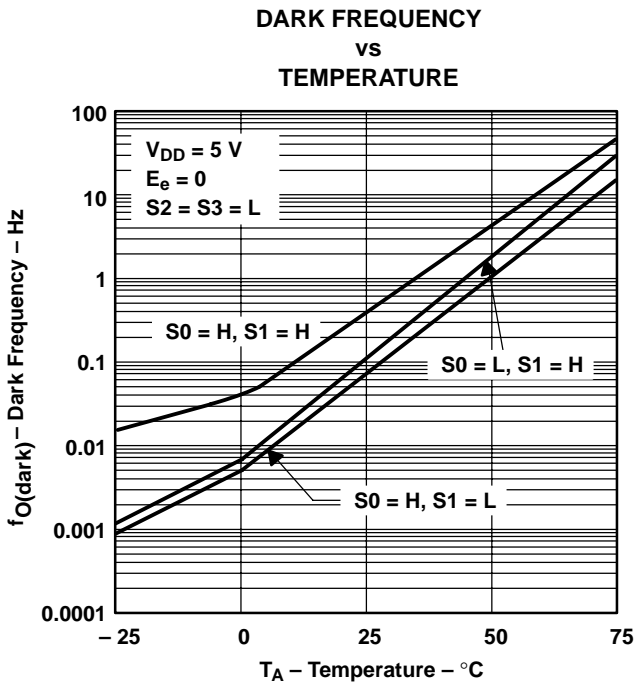


Figure 3

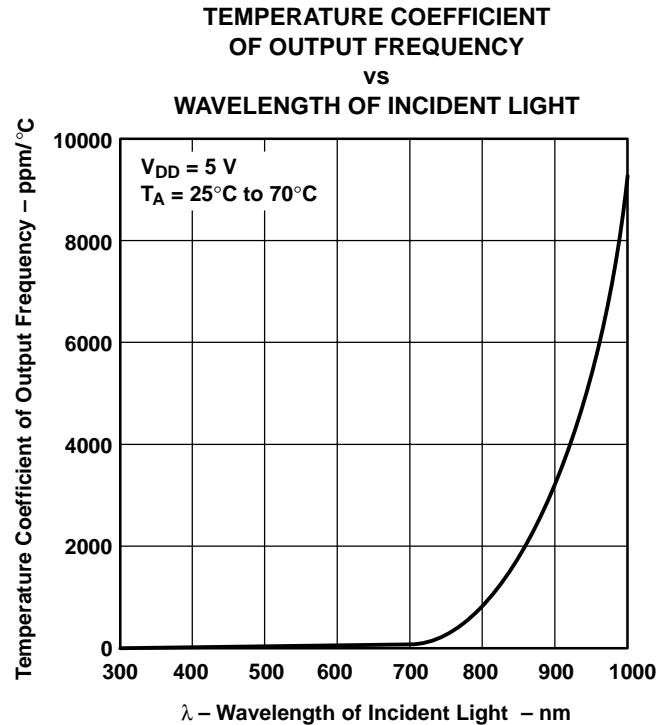


Figure 4

www.taosinc.com



TYPICAL CHARACTERISTICS

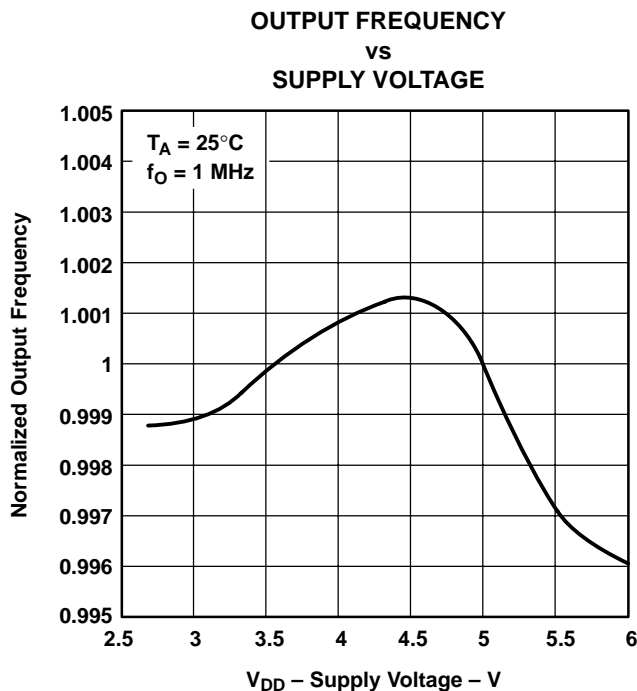


Figure 5

APPLICATION INFORMATION

**Power-supply considerations**

For optimum device performance, power-supply lines should be decoupled by a 0.01- $\mu$ F to 0.1- $\mu$ F capacitor with short leads.

**Output interface**

The output of the device is designed to drive a standard TTL or CMOS logic input over short distances. If lines greater than 12 inches are used on the output, a buffer or line driver is recommended.

**Sensitivity adjustment**

Sensitivity is controlled by two logic inputs, S0 and S1. Sensitivity is adjusted using an electronic iris technique — effectively an aperture control — to change the response of the device to a given amount of light. The sensitivity can be set to one of three levels: 1 $\times$ , 10 $\times$  or 100 $\times$ , providing two decades of adjustment. This allows the responsivity of the device to be optimized to a given light level while preserving the full-scale output-frequency range. Changing of sensitivity also changes the effective photodiode area by the same factor.

# TSL230, TSL230A, TSL230B PROGRAMMABLE LIGHT-TO-FREQUENCY CONVERTERS

TAOS004 – MAY 1999

---

## APPLICATION INFORMATION

### Output-frequency scaling

Output-frequency scaling is controlled by two logic inputs, S2 and S3. Scaling is accomplished on chip by internally connecting the pulse-train output of the converter to a series of frequency dividers. Divided outputs available are divide-by 2, 10, 100, and 1 (no division). Divided outputs are 50 percent-duty-cycle square waves while the direct output (divide-by 1) is a fixed-pulse-width pulse train. Because division of the output frequency is accomplished by counting pulses of the principal (divide-by 1) frequency, the final-output period represents an average of  $n$  (where  $n$  is 2, 10, or 100) periods of the principal frequency. The output-scaling-counter registers are cleared upon the next pulse of the principal frequency after any transition of the S0, S1, S2, S3, or OE lines. The output goes high upon the next subsequent pulse of the principal frequency, beginning a new valid period. This minimizes the time delay between a change on the input lines and the resulting new output period in the divided output modes. In contrast with the sensitivity adjust, use of the divided outputs lowers both the full-scale frequency and the dark frequency by the selected scale factor.

The frequency-scaling function allows the output range to be optimized for a variety of measurement techniques. The divide-by-1 or straight-through output can be used with a frequency counter, pulse accumulator, or high-speed timer (period measurement). The divided-down outputs may be used where only a slower frequency counter is available, such as a low-cost microcontroller, or where period measurement techniques are used. The divide-by-10 and divide-by-100 outputs provide lower frequency ranges for high resolution-period measurement.

### Measuring the frequency

The choice of interface and measurement technique depends on the desired resolution and data acquisition rate. For maximum data-acquisition rate, period-measurement techniques are used.

Using the divide-by-2 output, data can be collected at a rate of twice the output frequency or one data point every microsecond for full-scale output. Period measurement requires the use of a fast reference clock with available resolution directly related to reference-clock rate. Output scaling can be used to increase the resolution for a given clock rate or to maximize resolution as the light input changes. Period measurement is used to measure rapidly varying light levels or to make a very fast measurement of a constant light source.


Maximum resolution and accuracy may be obtained using frequency-measurement, pulse-accumulation, or integration techniques. Frequency measurements provide the added benefit of averaging out random- or high-frequency variations (jitter) resulting from noise in the light signal. Resolution is limited mainly by available counter registers and allowable measurement time. Frequency measurement is well suited for slowly varying or constant light levels and for reading average light levels over short periods of time. Integration (the accumulation of pulses over a very long period of time) can be used to measure exposure, the amount of light present in an area over a given time period.

# TSL230, TSL230A, TSL230B PROGRAMMABLE LIGHT-TO-FREQUENCY CONVERTERS

TAOS004 – MAY 1999

## MECHANICAL INFORMATION

This dual-in-line package consists of an integrated circuit mounted on a lead frame and encapsulated with an electrically nonconductive clear plastic compound. The photodiode area is typically 1.36 mm<sup>2</sup> (0.0029 in<sup>2</sup>) (S0 = S1 = H).

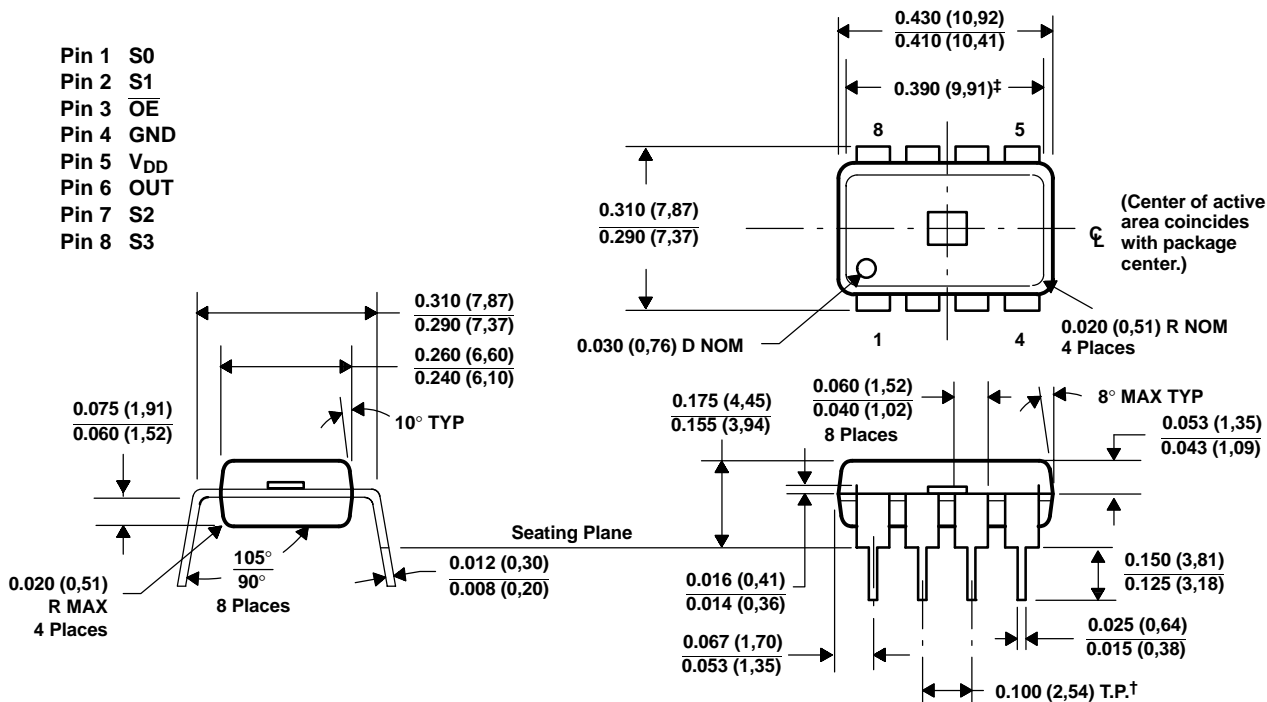

# TSL230, TSL230A, TSL230B PROGRAMMABLE LIGHT-TO-FREQUENCY CONVERTERS

TAOS004 – MAY 1999

---

**PRODUCTION DATA** — information in this document is current at publication date. Products conform to specifications in accordance with the terms of Texas Advanced Optoelectronic Solutions, Inc. standard warranty. Production processing does not necessarily include testing of all parameters.

## ***NOTICE***

Texas Advanced Optoelectronic Solutions, Inc. (TAOS) reserves the right to make changes to the products contained in this document to improve performance or for any other purpose, or to discontinue them without notice. Customers are advised to contact TAOS to obtain the latest product information before placing orders or designing TAOS products into systems.

TAOS assumes no responsibility for the use of any products or circuits described in this document or customer product design, conveys no license, either expressed or implied, under any patent or other right, and makes no representation that the circuits are free of patent infringement. TAOS further makes no claim as to the suitability of its products for any particular purpose, nor does TAOS assume any liability arising out of the use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages.

TEXAS ADVANCED OPTOELECTRONIC SOLUTIONS, INC. PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN CRITICAL APPLICATIONS IN WHICH THE FAILURE OR MALFUNCTION OF THE TAOS PRODUCT MAY RESULT IN PERSONAL INJURY OR DEATH. USE OF TAOS PRODUCTS IN LIFE SUPPORT SYSTEMS IS EXPRESSLY UNAUTHORIZED AND ANY SUCH USE BY A CUSTOMER IS COMPLETELY AT THE CUSTOMER'S RISK.

---

[www.taosinc.com](http://www.taosinc.com)

