



Video Intercom System
Katalog 2014

SCHICK [®]
HANDEL
Effective Security Solutions



INDEX

Company Profile

Wir verstehen uns nicht nur als Onlinehandelsunternehmen, sondern vielmehr als kompetenter Partner für die Planung, Beratung und Einrichtung ihrer Sprechanlage beziehungsweise Videoüberwachungsanlage. Wir beraten vor dem Verkauf der Video Sprechanlage, umfassend, sprechen bauliche Besonderheiten des potentiellen Videosprechanlagen Kunden ab, damit die dann bestellte Türsprechanlage auch problemlos installiert werden kann und sofort erwartungsgemäß funktioniert.

Bei Eventuellen Fragen zur Sprechanlage vor und nach dem Kauf sind wir auch im Türsprechanlagen Online Support, telefonisch oder per Mail erreichbar und helfen direkt.

Wir sind stets bemüht unsere Kunden so zu beraten und bei der Planung und Einrichtung der Sprechanlage zu unterstützen als wären wir selbst der Sprechanlagen-Kunde.

Eine Kombination der Videosprechanlage mit zusätzlichen Überwachungskameras und oder in Kombination mit einem DVR Langzeit-Überwachungs-Recorder ist problemlos möglich und wird im Shop ebenso angeboten und beraten wie Funk-Alarmanlagen.

Wir haben als Importeur jedes System vorab auf einfache Handhabung und Installation getestet, sind umfassend geschult und arbeiten seit vielen Jahren auch aufgrund auch der Komplexität des Themas mit ausschließlich dem gleichen zuverlässigen Produzenten unserer Geräte zusammen.

Somit sind wir in der Lage eine gute Qualität unsere Video Türsprechanlagen, Alarmanlagen und DVR-Überwachungssysteme zu gewährleisten und umfassend und zuverlässig zu beraten. Wir empfehlen jeden Sprechanlagen Kunden der noch unschlüssig ist was wie wo verbaut Sinn macht und möglich ist, unser Anfrageformular Türsprechanlagen Anlagenplanung zu benutzen oder im Live-Support mit uns zu chatten um Klarheit zu schaffen



T39 Series 3.9 inch Indoor Monitor



3.9 inch digital color TFT hand-free monitor

This is an indoor monitor comes with 3.9 inch color TFT with high resolution display (800*480). It represents a new concept of user-system that emphasizes simplicity and easy access to the various functions.

Features

- 3.9 inch TFT with high resolution (800*480 pixel)
- Touch sensor button and mechanical button
- Soft LED backlight
- Navigation keyboard
- 12pcs 8-chord melodies for choose freely
- Language customized



High Resolution Display

- 800x480 pixel
- Equals 7" digital TFT
- Perfect image quantity



Better user experience

- Easy operation unlock button
- Convenient talk button
- Multi indicators



Rich functionality

- True color menu
- Navigation keyboard



T16 Series 3.5 inch Indoor Monitor



Super-slim design



The most special feature for T16 series monitors is the slim and super thin design. The panel dimension is just 207x155mm and the thin is only 20mm. It is the better solution for your better life. Furthermore, the operation is more convenient with the E-structure button.

Wall/desktop installation



High resolution display



T24 Series 4 inch Indoor Monitor



Optional Handset

Optional handset device gives you one more choice for handset or hands free answering.



Touch sensor button

Touch sensor button with white backlight LED makes the indoor monitor more fashionable and beautiful.

Color loon interface



The color interface offers end user a friendly operation platform.

Other features

Built-in power supply (optional)
External memory (optional)

T27 Series 7 inch Indoor monitor



7 inch digital color TFT hand-free monitor

This hands-free indoor monitor comes with 7 inch color monitor. The LCD TFT monitor ensures quality chromatic performance under the color UI icon menu and the high-fidelity audio guarantees great acoustic performance in hand-free.

Features

- 7 inch digital TFT screen
- Slim design with touch sensor button
- Touch screen operation
- 12pcs 8-chord melodies for choosing freely
- Three color styles of housing for choice
- *1 Picture sharing
- *1 Album display (digital photo frame)
- *1 Text menu or color icon menu (SD card upgrade)
- *1 Inner 128MB flash memory plus extended
- Max.16G SD card external picture recording (optional)
- *1 Support VT-QSW Video quad splitter
- (*1 means that it depends on the model)



High Resolution Display

- 7 inch digital TFT
- 800x480 pixel
- Color icon/text menu



Touch Operation

- Touch screen
- Touch sensor button
- Working status illuminator



Slim design

- 125x225x28mm
- White or black housing
- Surface wall mounting



T37 Series 7 inch Indoor Monitor



7 inch digital color TFT hand-free monitor

It comes with 7 inch color LCD TFT monitor ensures quality chromatic performance under the color simple UI icon menu and much easier to operate under this UI icon, the high-fidelity audio guarantees great acoustic performance.

Features

- 7 inch digital TFT
- Super thin pad design 15mm thickness with touch sensor button
- Touch screen operation
- Soft LED backlight
- Video memory share via SCART
- Color icon menu
- 22pin 8 channel interfaces for connecting freely
- Magnetic bracket for installation
- Language & icon customizable



High Resolution Display

- 7 inch digital TFT
- 800x480 pixel
- Touch screen operation



Colorful LED Indicator

- Working status illuminator
- Colorful backlight
- Touch sensor button



Super Thin Pad-design

- 15mm thickness only
- White finishing with pad style
- Surface wall mounting

T47 Series

7 inch Indigo Monitor



7 inch digital color TFT hand-free monitor

Welcome to this kingdom of innovation and safety. It makes it easier for residents and visitors to gain safe access through comfort and functional design, which is reduced to the essentials by means of intuitive operability and style which can be integrated into all surroundings.

Features

- 7 inch digital TFT
- Color icon menu
- Shocking full black housing with touch sensor button
- Ultra-flat surface & super thin design
- Capacitive touch screen with high resolution
- 12 pcs 8-chord modules for choosing freely
- *1 Language & Icon replacement
- *1 Memory share via SCAM
- *1 *1 means that it depends on the model



High Resolution Display

- 7 inch digital TFT
- 800x480 pixel
- Color icon menu display



Capacitive Touch Screen

- Tempered glass panel
- Multi-touch operation
- Touch sensor button



Super Thin Design

- 18mm thickness only
- Shocking black housing
- Surface well-insulating



T601 Series Door Station



Surface mounted entry panel

This is the updated monolithic roller video entry panel with wide visual angle camera. Much better for the waterproof. And With high protection against unauthorised access.

Features

- Full stainless steel design with vandal proof latches
- 4mm plexiglass cover for protecting keypad password or proximity access control.
- Surface mounting
- Intra-eye lid for night view
- IP65 protection rate



Wide angle and dynamic camera

- 105° dynamic range
- Clearly to see the visitor under the backlight



Excellent water proof

- Perfectly water proof design(IP65)



Colorful backlit

- No different backlits to point out the state of door



T597 Series Door Station



Surface&flush mounted entry panel

Wide visual angle camera panel and safety for installation, based on its soft lens and elegant brushed stainless steel finish. What's more, it can be fitted for the soft surroundings with anti-rust medical 316L panel.

Features

- Anti-rust medical 316L stainless steel design
- High resolution wide-angle 4KS-108° camera
- Adjustable visual angle to show larger area
- Hidden high-white led light for night view
- Flame plate display with colorful light
- Excellent water proof performance(IP67)



High Resolution Camera

- 420TVL image quality
- 105° wide-angle visual
- Optical glass lens



Ingenious LED Illumination

- Nameplate with backlight
- Metal call button
- Conversation indicator



Safety & Elegance

- Stainless steel panel
- IP55 waterproof
- Flush mounting or surface mounting



T595 Series Door Station



Surface&flush mounted entry panel

If you want audio entry panel, only the panel could offer a choice for you, certainly. Of course, it also has wide angle camera, and its high quality resolution will satisfy your video requirements.

Features

- Zinc alloy elegant housing with compact design
- Surface mounting with rain cover
- Outstanding audio performance
- Comfortable call button
- Angle bracket installation if needed
- Excellent water proof performance(IP22)
- *1 Color ABS Camera with high resolution
- *1 Wide angle camera with 105 degree
- (*1 means that it depends on the model)



Full Zinc Alloy Casting

- Compact zinc alloy design
- Windstorm and vandalization



Waterproof & Dustproof

- IP55 rate design
- Excellent performance



Security & Protection

- Anti-theft screw mounting
- 30° angle bracket for option



T594 Series Door Station



Surface mounted entry panel

It is the new monolithic color video entry panel with wide visual angle camera. It will blend perfectly into any setting, thanks to its soft lines and plextalon panel. It can be fitted with single or double touch sensor buttons for single-family or two-family systems.

Features

- Plexiglass housing
- High resolution 116 degrees camera
- Adjustable visual angle
- Touch sensor call button
- Anti-heat & anti-corrosion
- Compatible with two families mode
- Strong wear proof performance
- Large name plate display



High Resolution Camera

- Curved design
- 102° wide angle for view
- Night view LED indicator



2 Call Buttons Optional

- Touch sensor button
- Control 2 locks available
- Large name plate display



PMMA Housing Design

- Smooth black panel
- Anti-frost & anti-corrosion
- Surface well insulating



591

Door Station



Surface mounted entry panel

The classic zinc alloy die-casting panel with high performance, more convenient for you to control, 2 doors, more securing you get at your life.

2 locks controlled

The 1991 model allows two locks to control the gate and the door is convenient for you to control. 2 outdoor. 2 makes your life more secure and more comfortable.

Two family modes

2 call button style for a common entry design.

Night vision LED

With night vision LEDs, the image can be seen clearly even at night or in dark environment.

Camera adjusted

The module allows you to adjust the angle flexible by yourself in order that you can surveillance different angle view condition.

Surface mounted


Its flat design makes it possible to install without cutting into the wall. The main advantages of the unit include easy installation, stable of art functions and a modern design.



**R12 Series
Door Station**



Selective Styles

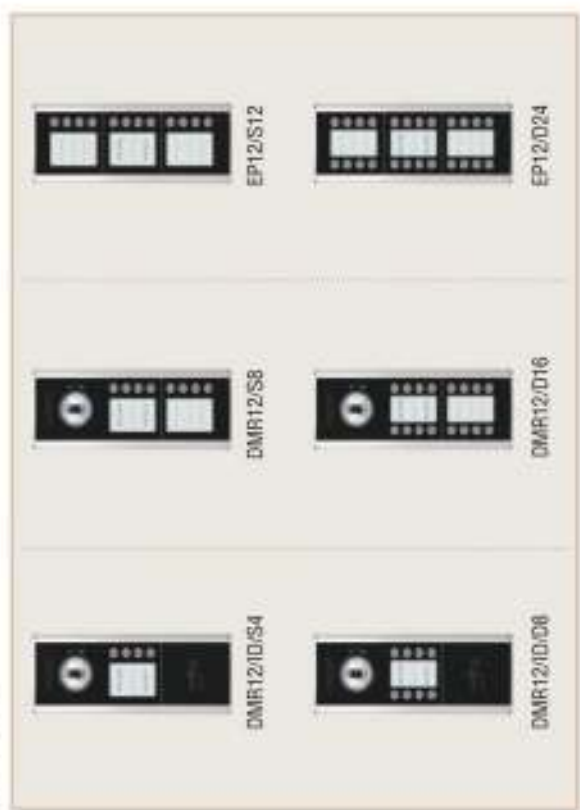

R11 Series

Door Station



Selective Styles



R18 Series

Door Station



Simple to Use

Just use your finger to input dial number you want by digital keypad. The calling will be activated immediately.



Access Card Reader

Built-in access controller works independently with highly reliable FRAM memory.

Three types of cards are supported: User card, Master card and manage card. Card management through local keypad or remote IP-800 software, and easily synchronized.

Easy Setup

With the LCD screen programming will be guided by means of wizard, texts guide for each step.

Advanced Debug Tools

The debug tools will greatly helps in system installation and maintaining. By running the On-line Search function, you can get the status of every single monitor of the system.

IP Communication

Communication over IP is provided by the TCP/IP protocol. Video and voice is transmitted via LAN/WAN.





Türsprechanlage 2 Draht BUS

Serie DT601



2 Wire System Description

The 2 WIRE SYSTEM is the best technology for those cases when TIME SAVING and EASY INSTALLATION are crucial. Thanks to the non polarized 2 wire system, it is in fact possible to install, with the same ease, all kinds of systems, from those for single villas to those for apartment complexes.

- Max. 32 Monitors in a system
- Max. 4 Door Stations
- Max. 6 CCTV cameras



System Application



System Advantage

Easy to Update Interface

Use simulator to edit and export Config data to SD card, insert SD card to the monitor to update UI data (depends on model).

Advanced Data Managing

The data such as screen logo, user name list, can be uploaded from PC to doorstation, and doorstation will send data to monitor automatically.



DIP Switches Setting

Use DIP switches to set the monitor address, other settings will be finished easily on the screen.



Plug-in Connector

With the Plug-in connector, you can set up the system fast and funny!



2 Easy Integrated Functions

INTERCOM

- Up to four monitors per apartment with enter call
- Prompt to print for users with name list playing
- Shared video recording memory to get high value in minimum cost

VIDEO SURVEILLANCE

- Analog cameras can be connect into system by means of DT-DCU
- 2-wire cameras DT-CAM1 can be connected to DT-DCU directly
- Camera views can be recorded as well as Door Stations

ACCESS CONTROL

- Keycard or RFID card access is available
- Most Door Stations support 2nd Lock directly
- Support timed unlock using timer powered or Dry-contact
- Additional relay actuator for heavy load locks

GSM/TELEPHONE GATEWAY

- Answer the call and open the door from remote telephone or mobile phone
- Gateway for analogue telephonic line by means of DT-TPC or DT-TPS
- Work with the mobile GSM network by means of DT-GSM


IP NETWORK

- IP network makes standalone 2-wire systems working together, for complex residential blocks
- Users can call Guard Station at any time

INTRUSION ALARM INTEGRATED

- Available by DT-AD2
- Alarm system can be integrated in the video door phone service
 - 4 wired zones and 14 wireless zones supported
 - Siren or strobe light activation
 - Alarm signal is transferred to Monitor, GSM or Guard Station

2 Wire System Application

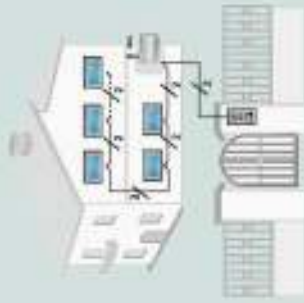


Cable end Distance


Cable	A(m)	B(m)	B(m)
CA15 Cable (Combined)	40	80	≤ 16 IM
Pair Cable (Parallel) 2x0.75 mm ²	30	50	≤ 16 IM
Twisted Cable 2x0.75 mm ²	60	100	40
Twisted Cable 2x1.0 mm ²	80	120	50

Extending Monitoring to 10)



In-Out topology

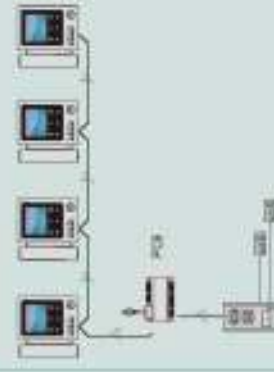


Star topology

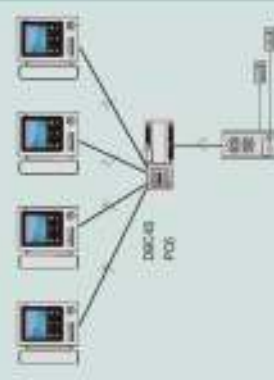

Extending Door/CCTV Cameras

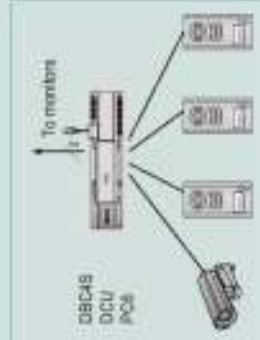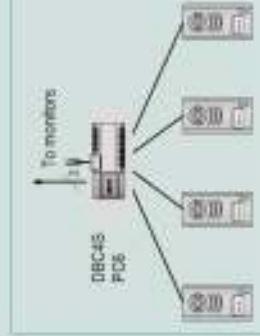

Connection Diagram

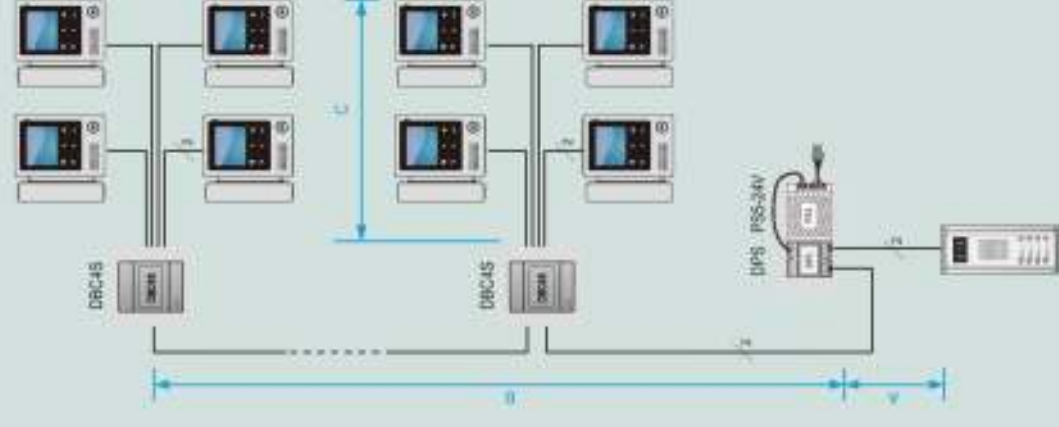

Cable and Distance

The maximum distance of the wiring is limited in the DT system. Using different cables may also affect the maximum distance of the system can reach.

When Monitor Quantity < 20

Cable Usage	A	B	C
Twisted cable 2x0.75mm ²	60	60	30
Twisted cable 2x1.0mm ²	80	80	40

When Monitor Quantity > 20

Cable Usage	A	B	C
Twisted cable 2x1.0mm ²	70	30	20
Twisted cable 2x1.5mm ²	70	30	30

Cables should be non-shielded! And the twisted cables are recommended, if non-twisted cable is used, the total distance will remain only to half!















































































2 Wire System Product List

Description
Monitor DT225TD7RWH101 7 inch digital color TFT screen monitor with touch screen operation & white housing, OSD menu
Monitor DT225D7001WH101 7 inch digital color TFT screen monitor with touch screen operation & picture memory & white housing, color test menu
Monitor DT225TD7RBL101 7 inch digital color TFT screen monitor with touch screen operation & black housing, OSD menu
Monitor DT225D7001BL101 7 inch digital color TFT screen monitor with touch screen operation & picture memory & black housing, color test menu
Monitor DT225TD7 7 inch digital color TFT screen monitor with capacitive touch screen operation & black housing, color test menu
Monitor DT225TD0 7 inch digital color TFT screen monitor with touch screen operation,color test menu
Monitor DT225D7010 10 inch digital color TFT screen monitor with touch screen operation,picture memory,color test menu
Monitor DT145D03 3.5 inch digital color TFT screen monitor with white housing, test menu
Monitor DT145D04K 3.5 inch digital color TFT screen monitor with aluminum front panel, test menu
Monitor DT250P4 4 inch digital color TFT screen monitor, test menu
Monitor DT260H4 4 inch digital color TFT screen handheld monitor, touch sensor button operation, test menu
Monitor DT3M01 3.9 inch digital color TFT screen handheld monitor, touch sensor button operation, test menu



Already nowadays 2-wire indoor monitor has been easier to use and flexible for installation solutions. As standardized, they are compatible for all outdoor systems in 2-wire system. As advanced, they fulfill the desire for extending the function concepts, such as telephone divert, CCTV camera connection, picture sharing, alarm function etc.

2 Wire System Product List

Description						
01 Sharp color CCD outdoor station with rainy cover, zinc alloy panel, white led light	DT501F/FP	DT603F	DT601S/FP	DT601S/FP	DT601S/FP	DT601S/FP
02 Sharp color CCD outdoor station with rainy cover/light buttons, zinc alloy panel, white led light						
03 Sharp color CCD outdoor station with rainy cover/light buttons, zinc alloy panel, white led light						
04 Audio outdoor station, zinc alloy housing						
05 Color CCD outdoor station by flush mounting (keypad access version), stainless steel panel						
06 Color CCD outdoor station by flush mounting (proximity access version)						
07 Color outdoor station, medical S316 stainless steel panel, high resolution AHS-105° camera, adjustable visual angle						
08 Color APS outdoor station with rain other keypad access version, stainless steel panel						
09 Color APS outdoor station with rain other proximity access version, stainless steel panel						
10 Color CCD outdoor station with proximity access camera (4 buttons), high resolution AHS-105° camera						
11 Color CCD outdoor station (4 buttons), high resolution AHS-105° camera						
12 Color CCD outdoor station (4 buttons), high resolution AHS-105° camera, aluminum panel						
13 Color CCD outdoor station with proximity access camera, aluminum panel						

2 Wire System Product List

						Description
01						Power Combo PCB Power combo unit, 3W 2A DC outputs
02						Power Supply 9GS-33V Power supply with general, 2W DC outputs
03						IF Gateway DT-IPC IF gateway converter(DT)
04						Telephone Interface DT-IPC Telephone interface converter(DT)
05						Camera Controller DT-SCK 2 wire camera controller, 2 inputs(DT)
06						Power Supply RSK-3W5STD1 Power supply, 2W 1A DC output, fire-rated mounting
07						Distributor DT-DBC Branch controller
08						Distributor DT-DBCS 4 output/inputs branch controller
09						Power Separator DT-DPS Power separator
10						2-wire Camera DT-CAM Sery 13 with CCD camera with bracket, infrared led, 20 meters
11						Camera Interface DT-DCU CCTV camera control unit, 2 inputs
12						Desk Bracket DT-DBBlack Desktop Bracket Whole desktop bracket optional.
13						Handset Audio-Pipeline DT-ID4S Handset audio phone with touch sensor button
14						Video Recorder DT-SCAV Public video recorder with mini SD card(DT)
15						GSM Interface DT-TPS GSM & telephone interface converter(DT)
16						DT-BOU DT SCU Kamera interface 2 x Kamera CCD / 2x BUS Kamera
17						DT-BOU DT SCU Kamera interface 2 x Kamera CCD / 2x BUS Kamera

More and more accessories are designed for stronger extending solutions. Like telephone GSM function,DVR output picture memory sharing, CCTV camera connecting and so on.

Appendix. Technical Information

Picture			
Applied System	2-Wire	CAT-5	CAT-5
Model	DT16	AT16	AT24
Dimension	220(H)x105(W)x20(D)mm	200(H)x155(W)x23(D)mm	188(H)x190(W)x38(D)mm
Package	249(H)x113(W)x37(D)mm	163(H)x240(W)x40(D)mm	163(H)x225(W)x45(D)mm
Screen	3.5" color TFT	4" color TFT	4" color TFT
Resolution	320 x 240 pixels	320 x 240 pixels	320 x 240 pixels
Memory	—	—	—
SD Card	—	—	—
Installation	Surface mounting	Surface mounting	Surface mounting
Two Views			
Mounting			

Indoor Monitors

Picture			
Applied System	2-Wire	4-Wire	CAT-5
Model	DT27	VT27	AT27
Dimension	125(H)x225(W)x23(D)mm	131(H)x212(W)x15(D)mm	131(H)x225(W)x18(D)mm
Package	163(H)x242(W)x38(D)mm	163(H)x242(W)x38(D)mm	163(H)x242(W)x38(D)mm
Screen	7" color TFT	7" color TFT	7" color TFT
Resolution	800 x 480 pixels	800 x 480 pixels	800 x 480 pixels
Memory	128MB	—	—
SD Card	2G, 4G, 8G, 16G	—	—
Installation	Surface mounting	Surface mounting	Surface mounting
Two Views			
Mounting			

Door Stations










Picture					
	Applied System	2-Wire	4-Wire	2-Wire	4-Wire
Model	DT581/2	DT581/2	DT594	DT595A	VT595
Dimension	178(H)×90(W)×24(D)mm	178(H)×92(W)×22(D)mm	138(H)×49(W)×28(D)mm	138(H)×49(W)×28(D)mm	155 (H)×100(W)×55(D)mm
Package	202(H)×100(W)×60(D)mm	202(H)×100(W)×60(D)mm	202(H)×100(W)×60(D)mm	202(H)×100(W)×60(D)mm	202(H)×100(W)×60(D)mm
Camera	Color CCD	Color ARS	Color ARS	Color ARS	Color ARS
Resolution	420 TV Lines	420 TV Lines	420 TV Lines	420 TV Lines	420 TV Lines
Panel	Zinc alloy	PMMC/Stainless steel	Zinc alloy	Zinc alloy	Zinc alloy
Waterproof	IP45	IP44	IP55	IP55	IP55
Installation	Surface mounting	Surface mounting	Surface mounting	Surface mounting	Surface mounting
Two Views					
	Mounting				

Door Stations

Picture				
	Applied System	2-Wire	2-Wire	4-Wire
Model	DT601KP	DT601ID	DT606SF	VT606F
Dimension	182(H)×93(W)×44(D)mm	220(H)×119(W)×52(D)mm	220(H)×119(W)×52(D)mm	188(H)×110(W)×34(D)mm
Package	202(H)×100(W)×50(D)mm	163(H)×124(W)×38(D)mm	163(H)×124(W)×38(D)mm	163(H)×124(W)×38(D)mm
Camera	Color ARS	Color ARS	Color CCD	Color ARS
Resolution	420 TV Lines	420 TV Lines	420 TV Lines	420 TV Lines
Panel	Stainless steel	Stainless steel	Stainless steel	Stainless steel(S316)
Waterproof	IP65	IP65	IP45	IP45
Installation	Surface mounting	Flush mounting	Flush mounting	Flush or Surface mounting
Two Views				
	Mounting			

Notes

Door Stations

Return			
Applied System	2-Wire	CAT-5	2-Wire
Model	DMR11	MR11	DMR1B
Dimension	313(H) x 128(W) x 63(D)mm	303(H) x 128(W) x 25(D)mm	350(H) x 128(W) x 46(D)mm
Package	365(H) x 145(W) x 75(D)mm	365(H) x 145(W) x 75(D)mm	365(H) x 145(W) x 75(D)mm
Camera	Color ARS	Color ARS	Color ARS
Resolution	430 TV Lines	430 TV Lines	430 TV Lines
Panel	Aluminum alloy	Aluminum alloy	Aluminum alloy
Waterproof	IP45	IP44	IP55
Installation	Flush or Surface mounting	Flush or Surface mounting	Flush or Surface mounting
Two Views			
Mounting			

GSM Alarm-System SHG-70 Ultimate



- Funkalarm-Überwachungssystem im kompletten Gehäuse
- LCD-Display mit Sensortypen und moderner Menüführung
- Sprachfunktion in sechs weitere Sprachen erweiterbar
- ADREX, STAY ALIVE (Ab- und Absenken) / Mod für den Einsatz im Wohnbereich
- 30 Funktionen, 8 Konzentration Bereiche
- geeignet für maximal 8 drahtlose Schließzylinder oder 2-schlüssler
- bis zu 5 Telefonnummern für automatische Anrufe und SMS programmierbar
- achtst. Tastenschichten von bis zu 9 Sekunden Länge auf
- Alarm- und Betriebsstör
- wiederaufladbare Akkubatterie
- ADEMCO Remote ID

Der Schutz vor unbefugtem Einbringen und Einbruch haben bei der Absicherung Ihres Heimes das höchste Priorität. Unsere Sicherheitüberwachungsanlagen sind mit hochmodernen Bewegungsmeldern, Regenwassersensoren und Überwachungskameras ausgestattet, um so die bösten Kräfte fernzuhalten.

Brand
Verhindern Sie das Ausbreiten einer Brandkatastrophe. Das frühzeitige Melden von Bränden, noch ehe diese sich in Ihrem Haus ausbreiten können, gibt es auch zu den wesentlichen Aufgaben unserer Sicherheitsüberwachungsanlagen. Schützen Sie Ihr Zuhause vor Brandkatastrophen.

Überschmutzungen
So nützlich reichzeitig hersehnd wässert, wenn Wasser in Ihrem Keller an/oder Ihr Haus einfließt? Wassermeldegewissen gehen bei Wasserkontakt unsernichtig Alarmmeldungen aus.

Kohlenmonoxid
Moderne Alarmanlagen schützen nicht nur vor Erdtrogungen und Bränden. Mit Kohlenmonoxidmeldern ausgestattet, kann das Überwachungsgeräten Sie und Ihre Lieben auch gegen giftige Gase schützen.

	GSM zgl. Telefonleitung kompatibel		Teilzeiger Funktion
	Quad Band GSM-Kommunikationsmodul		Smart-Zonen funktionslernen
	Smart-Touch-Keypad Plus LCD-Duplay		Eingebaute Sirene
	30-drahtlose Zonen, unterstützt 116-Einzelnen Funkdetektoren		Stütztelefonos / vertriehten Indoor / Outdoor-Sirene
	8 fest verbundene Zonen (optisch)		Sirene einstellbar
	Minimale Unterverzögerung 8-Einheiten Fernbedienkung		Power off SMS
	Shop 5-Telefonnummern und 1-zentrale Überwachungsstation		100 Alarmprotokolle, 100 Kontakte logs
	Alarmmeldung via Audio Telefonruf und SMS (SMS)		Kompatibel mit ADEMCO Contact ID
	Startsalle scharf [Teil scharf]		Hochklare Status zentrale Überwachungsstation
	Ein-/Eingangsverzögerungsgruppe, einstellbar		Arbeiten mit CCTV-System, IP-Kamera
	Sprachmemo beschreibbare (10 Sekunden)		
	Erweiterbare Zonenfunktion, voll programmierbar		
	Bypass-Zone-Unterstützung		



DVR - Videoüberwachung



8CH DVR mit 960H/D1 Aufnahme & Wiedergabe

Beschreibung

DVR-9108D1 ist ein 8-Kanal, voll integriertes Echtzeit digitales Video DVR Gerät.

Das SHDVR-9104D1 8-Kanal-DVR verfügt über ein Linux Betriebssystem und setzt neueste H.264-Video-Komprimierung ein, dies ist ein Garant für qualitativ hochwertige Bilder und reduzierten den Speicherplatz.

Es unterstützt RS485 PTZ-Steuerung, Alarm Ein- und Ausgang. Dieser DVR Recorder kann die 8-Kanal-Video Signale in Echtzeit in 960H (976px x 582px) 200fps/240fps anzeigen .

Darüber hinaus unterstützt der digitale Video-Recorder HDMI (1080p) Video-Ausgang, sehr hohe Qualität in Aufzeichnung und Wiedergabe von Videomaterial . Dieser DVR unterstützt verschiedene Aufnahme-Modi (einschließlich geplante Aufnahme, Bewegung ermittelte Aufnahme, ununterbrochene Aufnahme), voll unterstützt Remote-Überwachung und die Kontrolle über das Internet und 3G mobile Geräte.



960H/D1 Recording

Die High-Definition-Aufzeichnung bei 960H (5x von CIF), mit 700 TV-Linien hochwertige Live-Anzeige und Aufzeichnung mit 34% Steigerung gegenüber Standard-D1-Auflösung



HDMI 1080p-Display

mit HDMI-Anschluss für High-Definition-Video-Ausgang mit 1080p-Auflösung. Hochauflösende Video-Stream-Anzeige auf Ihrem HD-Monitor.



Kalender Suche

Flexibler Suchmodus mit Zeit und Kalender.



Netzwerk-Funktion

Standard-RJ54-Port, Unterstützung DHCP / PPPoE / FTP / DNS / DDNS / NTP / Email Alarm / IP rechte / IP Suche / network Alarm-Center-Funktionen, Unterstützung WEB Client Standalone-Client und SDK.



E-Mail-Alarm

Wenn das DVR System eine Bewegung erfasst wird das DVR System Bilder aufnehmen und auf der optionalen externen oder fest verbauten Festplatte bis 2 TB abspeichern ferner erhalten sie eine Alarmmeldung per Mail.



USB-Maus

-Unterstützung Plug-and-Play-USB-Maus für den Betrieb (im Lieferumfang enthalten)
H.264-Komprimierung
H.264 Main Profile Videokompression, erhöht um das 2,2-fache der Bildqualität und reduziert 40% Speicher.