

LC-R123R4PU



Specifications

Nominal voltage		12V
Rated capacity (20 hour rate)		3.4Ah
Dimensions	Length	134 mm
	Width	67 mm
	Height	60 mm
	Total Height	66 mm
Approx. mass		1.2 kg
Country of origin		Japan


Characteristics

Capacity ^(note) (25°C)		20 hour rate (170mA)	3.4Ah
		10 hour rate (300mA)	3.0Ah
		5 hour rate (540mA)	2.7Ah
		1 hour rate (2100mA)	2.1Ah
		1.5 hour rate discharge Cut-off voltage 10.5 V	1.5A
Internal resistance		Fully charged battery (25°C)	Approx. 60mΩ
Temperature dependency of capacity (20 hour rate)		40°C	102 %
		25°C	100 %
		0°C	85 %
		-15°C	65 %
Self discharge (25°C)		Residual capacity after standing 3 months	91%
		Residual capacity after standing 6 months	82%
		Residual capacity after standing 12 months	64%
Charge Method (Constant Voltage)	Cycle use (Repeating use)	Initial current	1.36 A or smaller
		Control voltage	Constant voltage; 14.5 to 14.9 V (per 12V cell 25°C)
	Trickle use	Control voltage	13.6 to 13.8 V (per 12V cell 25°C)


(Note) The above characteristics data are average values obtained within three charge/discharge Cycles not the minimum values.

For main and standby power supplies.
Expected trickle life: 3-5 years at 25°C, 5 years at 20°C.

Dimensions (mm)

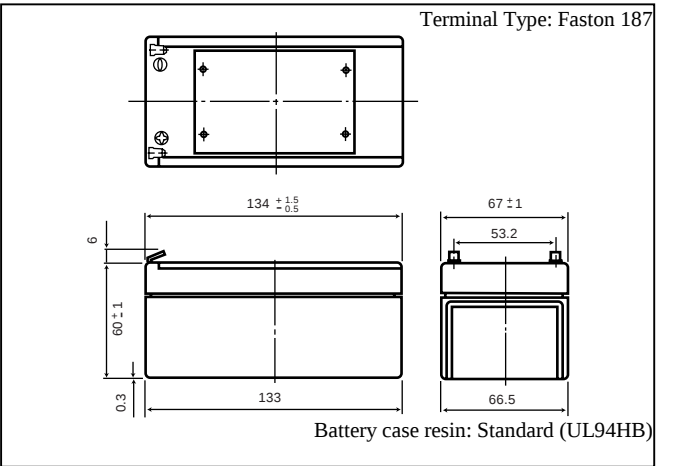

Discharge characteristics (25°C) ^(note)

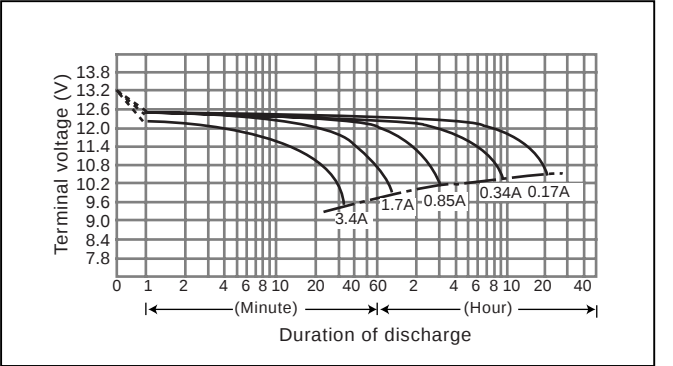

Duration of discharge vs. Discharge current ^(note)

