


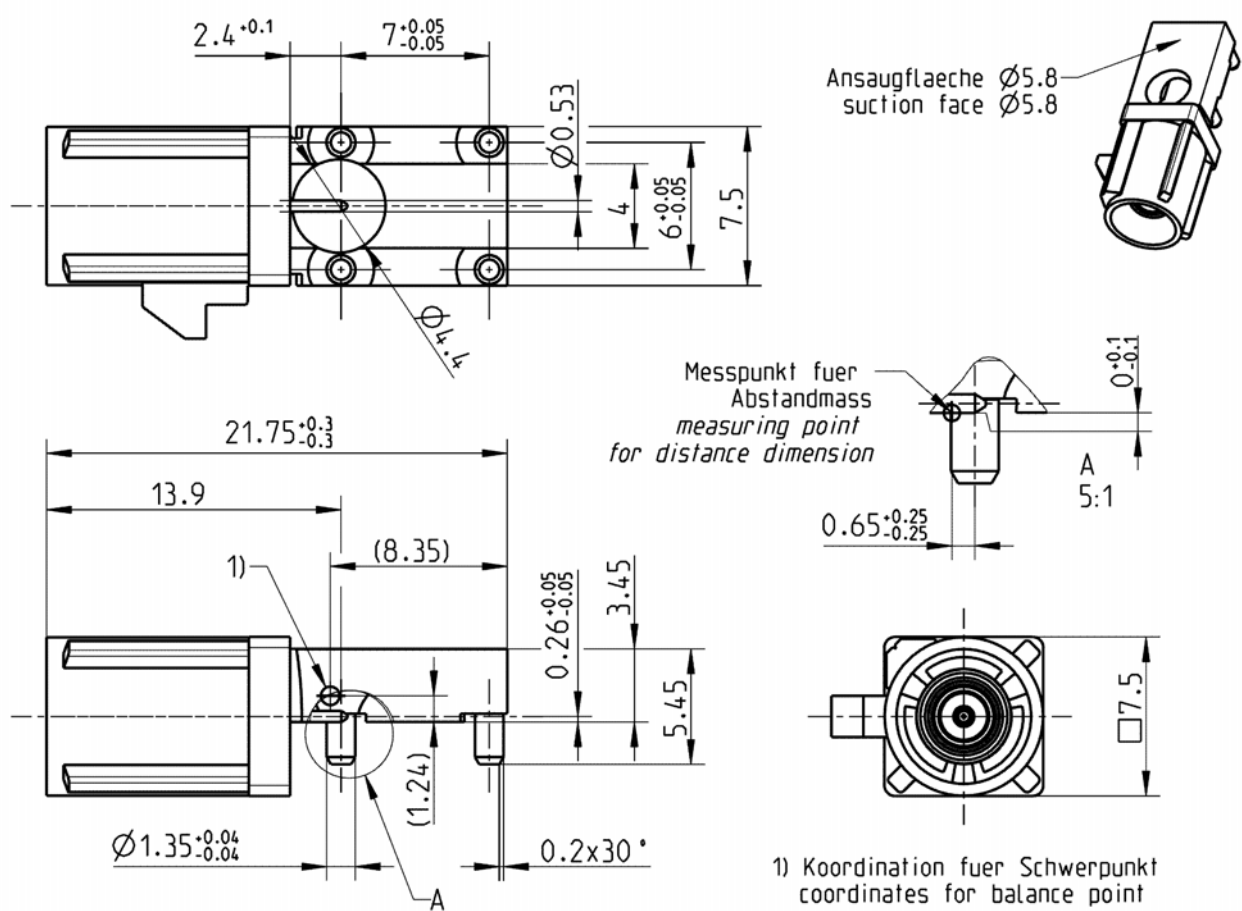

Y = Part number has to be accomplished by codification

Interface

According to

DIN 72594-1

Documents

Assembly instruction

MA_59V032

PCB layout

MB_172

Tape & reel packaging

VG67.50000

Material and plating

Connector parts

Center contact
Outer contact
Dielectric
Housing

Material

Brass
Brass
PTFE
PA 6T/66

Plating

AuroDur®, gold plated
AuroDur®, gold plated

Electrical data

Impedance	50 Ω
Frequency	DC to 6 GHz
Return loss measured on 50 Ω footprint	≥ 24 dB
Insertion loss	≤ 0.1 x dB
Insulation resistance	$\geq 1 \times 10^3$ M Ω
Center contact resistance	≤ 5 m Ω
Outer contact resistance	≤ 5 m Ω
Test voltage	750 V rms
Working voltage	335 V rms
Power current	≤ 1 A DC

-Connector only, VSWR in application depends decisive on PCB layout-

Mechanical data

Mating cycles	≥ 25
Engagement force	≤ 25 N
Disengagement force	≥ 2 N
Retention force latch	≥ 110 N
Coding efficiency	≥ 40 N

Environmental data

Temperature range	-40°C to +105°C
Thermal shock	DIN 72594-2 clause 6.2
Temperature and humidity	DIN 72594-2 clause 6.3
Vibration and mechanical shock	DIN 72594-2 clause 6.1
Dry heat	DIN 72594-2 clause 6.4
Soldering profile	acc. IEC 60068-2-58 group 3&4
2002/95/EC (RoHS)	compliant

Tooling

N/A

Packing

Standard	500 pcs in tape & reel
Weight	2.42 g/pce

Coding

Part Number has to be accomplished by codification

Coding	Color	RAL	Part-Number
 A	black	sim. 9005	59S2RR-40ML5-A
 B	white	sim. 9001	59S2RR-40ML5-B
 C	blue	sim. 5005	59S2RR-40ML5-C
 D	bordeauxviolet	sim. 4004	59S2RR-40ML5-D
 E	green	sim. 6002	59S2RR-40ML5-E
 F	brown	sim. 8011	59S2RR-40ML5-F
 G	grey	sim. 7031	59S2RR-40ML5-G
 H	violet	sim. 4003	59S2RR-40ML5-H
 I	beige	sim. 1001	59S2RR-40ML5-I
 K	curry	sim. 1027	59S2RR-40ML5-K
 L	Carmine red	sim. 3002	59S2RR-40ML5-L
 M	pastel orange	sim. 2003	59S2RR-40ML5-M
 N	pastel green	sim. 6019	59S2RR-40ML5-N
 Z	waterblue	sim. 5021	59S2RR-40ML5-Z

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Thomas Höfling	14/02/07	Thomas Höfling	17/11/09	h00	09-0830	Inge Mühlauer	03/12/09
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de			Page 3 / 3