


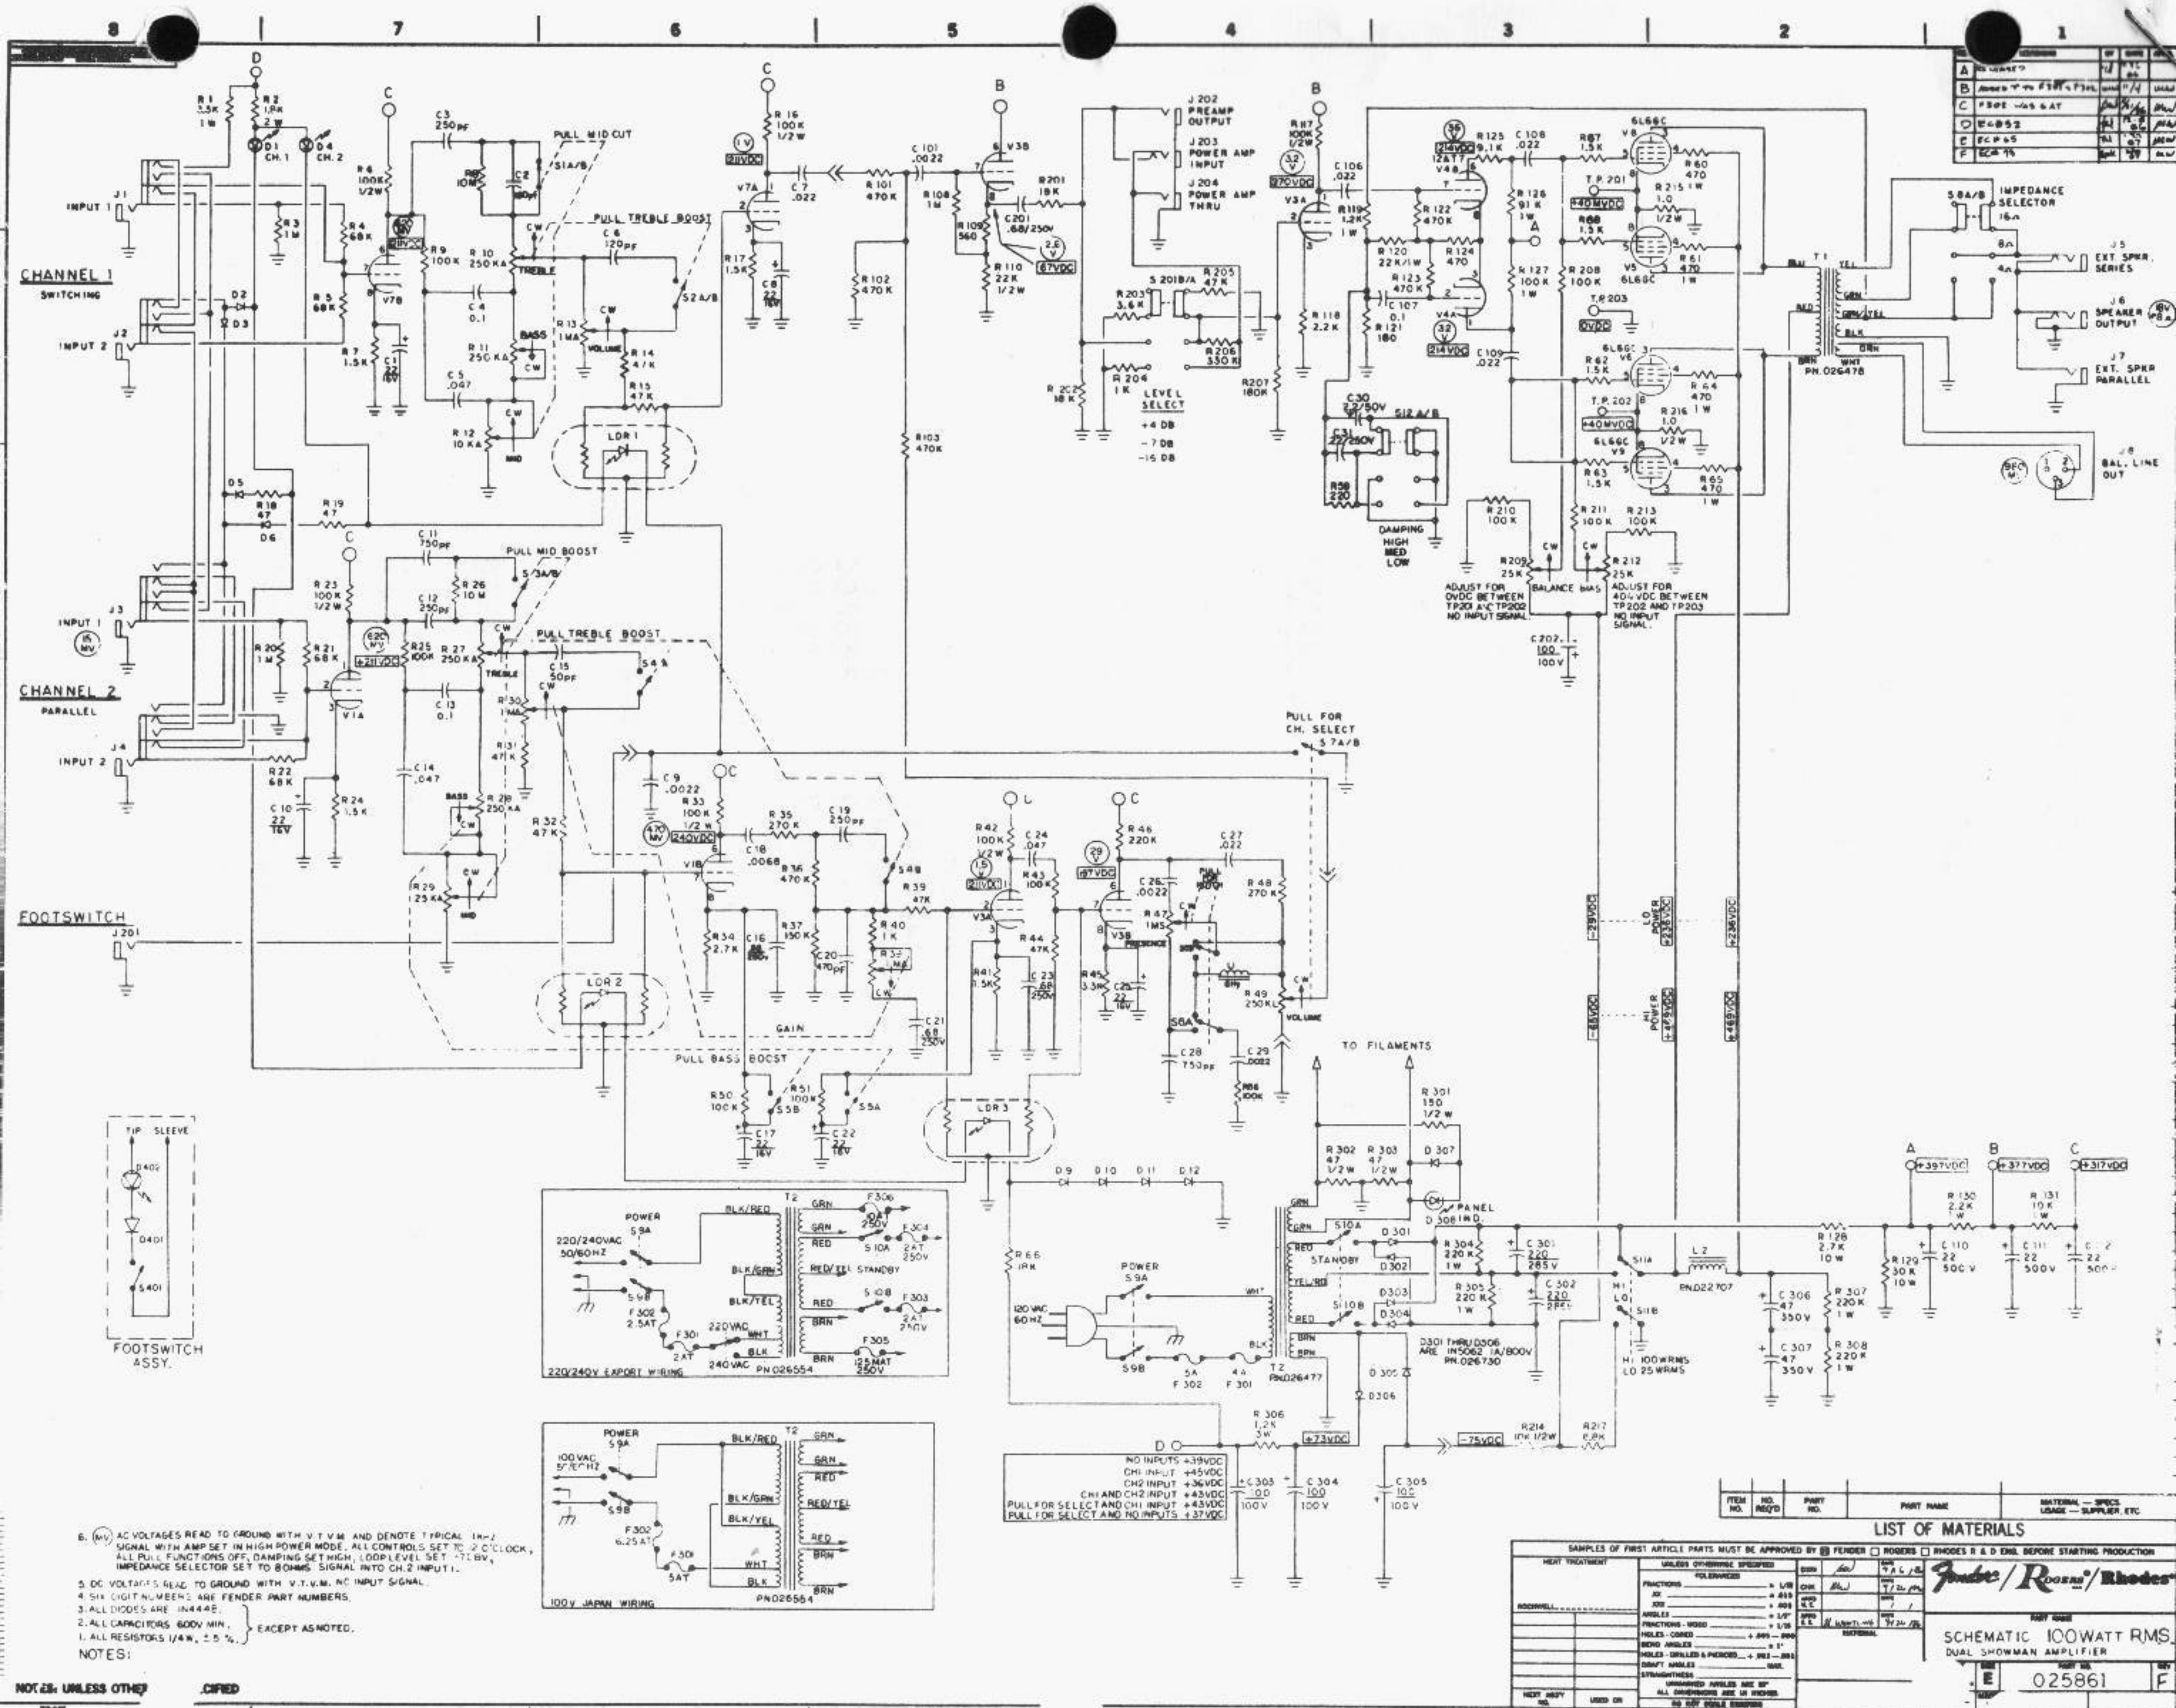

6. (V) AC VOLTAGES READ TO GROUND WITH V.T.V.M. AND DENOTE TYPICAL 1W/2 SIGNAL WITH AMP SET IN HIGH POWER MODE. ALL CONTROLS SET TO 2 O'CLOCK, ALL PULL FUNCTIONS OFF, DAMPING SET HIGH, LOOP LEVEL SET -7LBY, IMPEDANCE SELECTOR SET TO 80MM. SIGNAL INTO CH.2 INPUT.

5. DC VOLTAGES READ TO GROUND WITH V.T.V.M. NO INPUT SIGNAL.
4. SIX DIGIT NUMBERS ARE FENDER PART NUMBERS.
3. ALL DIODES ARE IN444E.
2. ALL CAPACITORS 600V MIN.
1. ALL RESISTORS 1/4W, ±5%.

NOTES:

NOTES: UNLESS OTHER

CIFIED

SCHEMATIC 100WATT RMS DUAL SHOWMAN AMPLIFIER

025861

F