

# EVAL-M1-05F804

## iMOTION™ Modular Application Design Kit

### About this document

#### Scope and purpose

This application note provides an overview of the evaluation board EVAL-M1-05F804 including its main features, key data, pin assignments and mechanical dimensions.

EVAL-M1-05F804 is a complete power evaluation board including three CIPOS™ Nano 40V half-bridge modules for motor drive application. In combination with either EVAL-M1-1302 or EVAL-M1-099M it features and demonstrates Infineon's CIPOS™ technology for motor drive.

The evaluation board EVAL-M1-05F804 was developed to support customers during their first steps designing applications with IRSM005-800MH CIPOS™ Nano power modules.

#### Intended audience

This application note is intended for all technical specialists working with the EVAL-M1-05F804 board.

### Table of Contents

|                                                    |           |
|----------------------------------------------------|-----------|
| <b>About this document</b> .....                   | <b>1</b>  |
| <b>Table of Contents</b> .....                     | <b>1</b>  |
| <b>1 Safety precautions</b> .....                  | <b>2</b>  |
| <b>2 Introduction</b> .....                        | <b>4</b>  |
| <b>3 Main features</b> .....                       | <b>5</b>  |
| 3.1 Key data .....                                 | 6         |
| <b>4 Pin assignments</b> .....                     | <b>10</b> |
| <b>5 Schematics and Layout</b> .....               | <b>11</b> |
| 5.1 DC-Link Voltage Measurement .....              | 11        |
| 5.2 Inverter section using CIPOS™ Nano .....       | 12        |
| 5.3 Power supply .....                             | 14        |
| 5.4 Over current protection circuitry.....         | 14        |
| 5.5 PCB Layout .....                               | 15        |
| <b>6 Bill of Materials of EVAL-M1-05F804</b> ..... | <b>17</b> |
| <b>7 Reference</b> .....                           | <b>20</b> |
| <b>Revision History</b> .....                      | <b>21</b> |

# 1 Safety precautions

In addition to the precautions listed throughout this manual, please read and understand the following statements regarding hazards associated with development systems.

**Table 1** Precautions

|                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <p><b>Attention:</b> <i>The ground potential of the EVAL-M1-05F804 system is biased to a negative DC bus voltage potential. When measuring voltage waveform by oscilloscope, the scope’s ground needs to be isolated. Failure to do so may result in personal injury or death. Darkened display LEDs are not an indication that capacitors have discharged to safe voltage levels.</i></p>                                                         |
|    | <p><b>Attention:</b> <i>EVAL-M1-05F804 system contains DC bus capacitors which take time to discharge after removal of the main supply. Before working on the drive system, wait three minutes for capacitors to discharge to safe voltage levels. Failure to do so may result in personal injury or death. Darkened display LEDs are not an indication that capacitors have discharged to safe voltage levels.</i></p>                            |
|  | <p><b>Attention:</b> <i>Only personnel familiar with the drive and associated machinery should plan or implement the installation, start-up and subsequent maintenance of the system. Failure to comply may result in personal injury and/or equipment damage.</i></p>                                                                                                                                                                             |
|  | <p><b>Attention:</b> <i>The surfaces of the drive may become hot, which may cause injury.</i></p>                                                                                                                                                                                                                                                                                                                                                  |
|  | <p><b>Attention:</b> <i>EVAL-M1-05F804 system contains parts and assemblies sensitive to Electrostatic Discharge (ESD). Electrostatic control precautions are required when installing, testing, servicing or repairing this assembly. Component damage may result if ESD control procedures are not followed. If you are not familiar with electrostatic control procedures, refer to applicable ESD protection handbooks and guidelines.</i></p> |
|  | <p><b>Attention:</b> <i>A drive, incorrectly applied or installed, can result in component damage or reduction in product lifetime. Wiring or application errors such as under sizing the motor, supplying an incorrect or inadequate AC supply or excessive ambient temperatures may result in system malfunction.</i></p>                                                                                                                        |

**Safety precautions**

|                                                                                   |                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><b><i>Attention: Remove and lock out power from the drive before you disconnect or reconnect wires or perform service. Wait three minutes after removing power to discharge the bus capacitors. Do not attempt to service the drive until the bus capacitors have discharged to zero. Failure to do so may result in personal injury or death.</i></b></p> |
|  | <p><b><i>Attention: EVAL-M1-05F804 system is shipped with packing materials that need to be Removed prior to installation. Failure to remove all packing materials which are unnecessary for system installation may result in overheating or abnormal operating condition.</i></b></p>                                                                       |

## 2 Introduction

The EVAL-M1-05F804 evaluation board is a part of the iMOTION™ Modular Application Design Kit for motor control (iMOTION™ MADK).


The MADK platform is intended to use various power stages with different control boards. These boards can easily be interfaced through the 20 pin iMOTION™ MADK-M1 interface connector.

This evaluation board is designed to give comprehensible solutions of a power stage featuring CIPOS™. It provides a DC input and 3-phase output for power. It contains three emitter-shunts for current sensing and a voltage divider for DC-link voltage measurement.

The EVAL-M1-05F804 evaluation board is available from Infineon. The features of this board are described in the design feature chapter of this document, whereas the remaining paragraphs provide information to enable the customers to copy, modify and qualify the design for production according to their own specific requirements.

Environmental conditions were considered in the design of the EVAL-M1-05F804. The design was tested as described in this document but not qualified regarding safety requirements or manufacturing and operation over the whole operating temperature range or lifetime. The boards provided by Infineon are subject to functional testing only.

Evaluation boards are not subject to the same procedures as regular products regarding Returned Material Analysis (RMA), Process Change Notification (PCN) and Product Discontinuation (PD). Evaluation boards are intended to be used under laboratory conditions by specialists only.

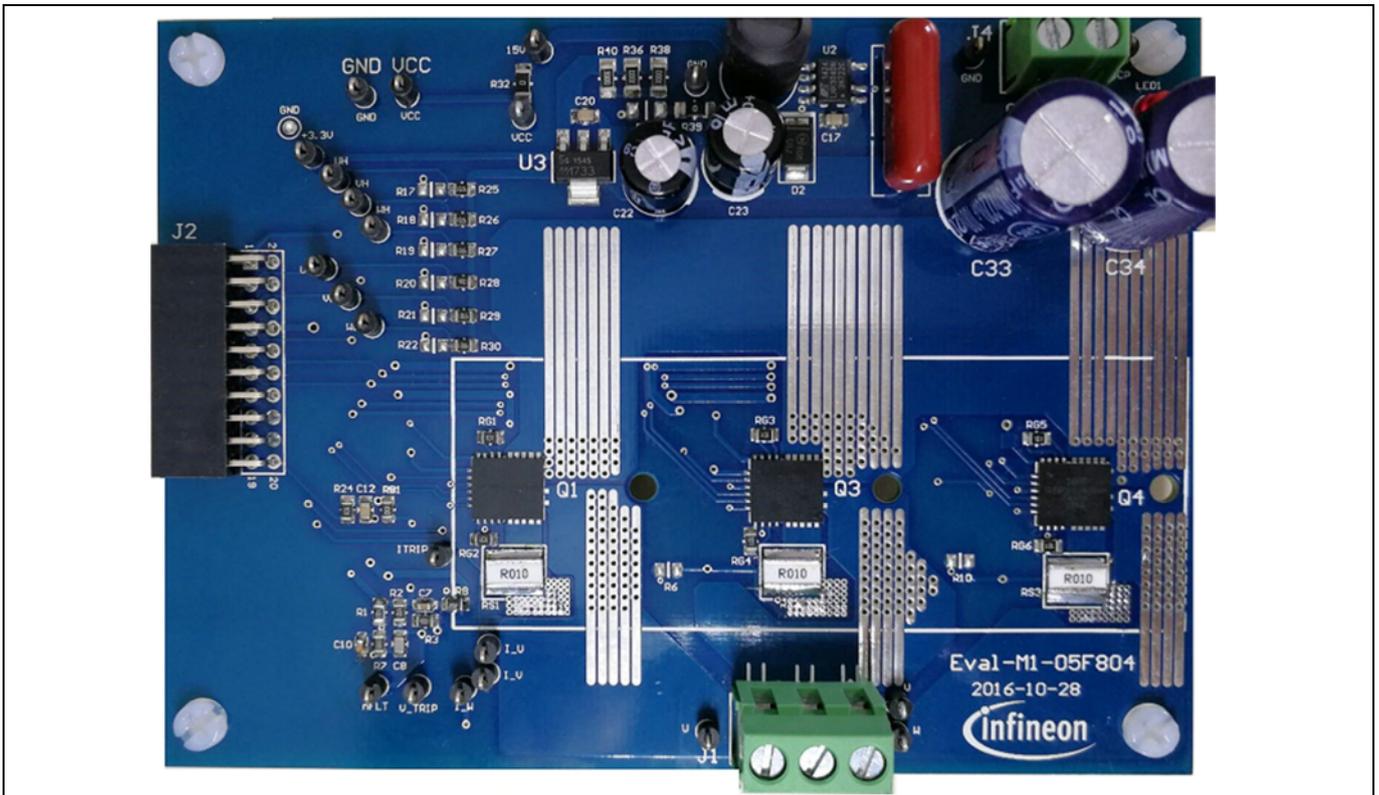

**Figure 1 Evaluation board EVAL-M1-05F804**

Figure 1 shows the picture of evaluation board EVAL-M1-05F804. This board is compatible with surface mount CIPOS™ modules. This document explains the features and details of this board in combination with CIPOS™ Nano IRSM005-800MH. The difference between these modules is current and voltage. Ratings and other details of the board are explained in the subsequent sections.

**Main features**

### 3 Main features

EVAL-M1-05F804 is a complete power evaluation board including a 3-phase IPM for motor drive application. The kit demonstrates Infineon's IPM technology for motor drives.

Main features of CIPOS™ Nano Intelligent Power Module IRSM005-800MH are:

- MOSFET Drain-to-Source Voltage 40V
- Maximum DC current at 25°C case temperature  $I_c = 80A$
- Up to 165W power output at 10 kHz PWM frequency.
- Package with low thermal resistance and minimal parasitics
- Independent gate driver in phase with logic input
- Gate drive supply range from 10V to 20V
- Propagation delay matched to defined spec
- 3V, 5V and 15V logic input compatible
- Integrated gate drivers
- Under-voltage lockout protection inside the driver
- On board overcurrent protection
- Exposed driver outputs and HEXFET gate terminals for  $dV/dt$  setting through a resistor

The evaluation board characteristics are:

- Up to 165W motor power range
- Possibility to easy change between 3 Leg shunt to single shunt configuration
- Compatible with the following CIPOS™ Nano module:  
IRSM005-800MH                      80A / 2.7mΩ, 40V
- RoHS complaint
- PCB is 118 x 85 mm and has two layers with 35 μm copper each

Main features

3.1 Key data

Figure 2 provides the overview of the IRSM005-800MH internal electrical schematics. For further information regarding these CIPOS™ like static and dynamic electrical behavior, as well as thermal and mechanical characteristics please refer to the datasheet of the IRSM005-800MH.

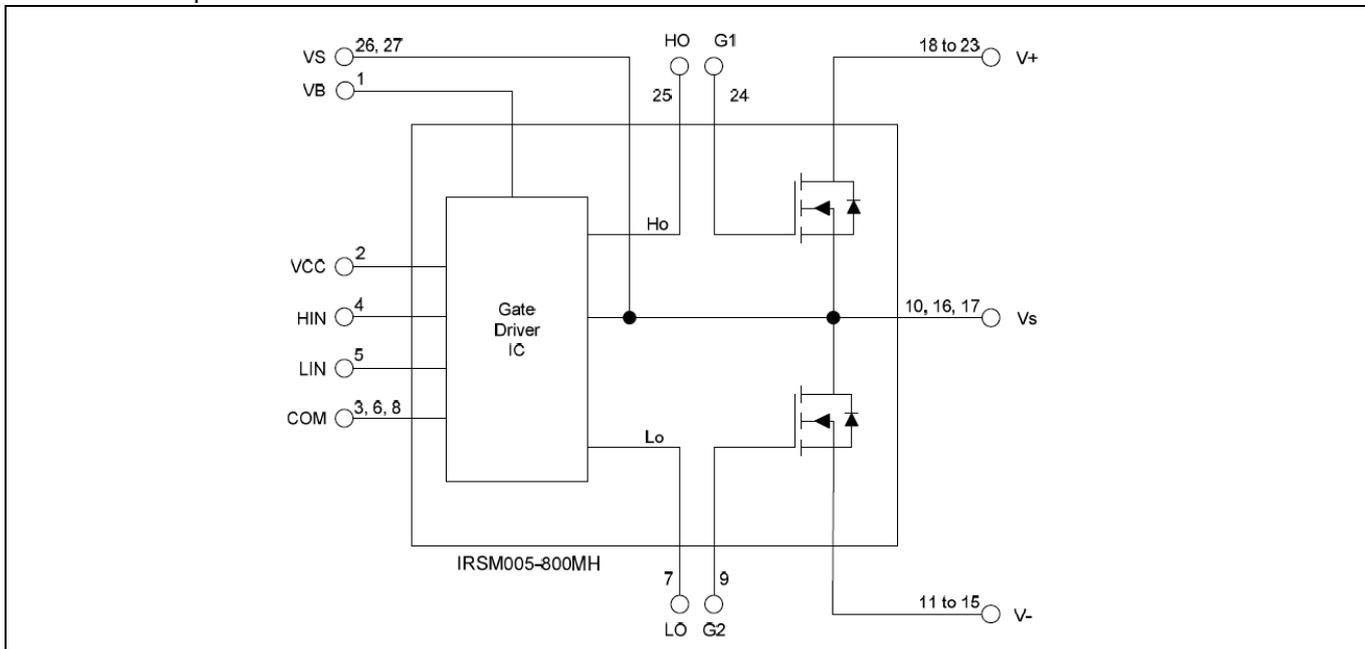


Figure 2 CIPOS™ Nano internal electrical schematic

Table 2 Provide the absolute maximum ratings of the IRSM005-800MH.

Table 2 Absolute Maximum Ratings of IRSM005-800MH

| Symbol                       | Description                                      | Min                | Max                   | Unit |
|------------------------------|--------------------------------------------------|--------------------|-----------------------|------|
| V <sub>DS</sub>              | MOSFET Drain-to-Source Voltage                   | ---                | 40                    | V    |
| I <sub>o</sub>               | Maximum DC current per MOSFET @ TC=25°C (Note1)  | ---                | 80                    | A    |
| P <sub>d</sub>               | Maximum Power dissipation per MOSFET @ TC =100°C | ---                | 13                    | W    |
| T <sub>J</sub> (MOSFET & IC) | Maximum Operating Junction Temperature           | ---                | 150                   | °C   |
| T <sub>s</sub>               | Storage Temperature Range                        | -40                | 150                   | °C   |
| V <sub>GS</sub>              | Gate to Source voltage                           | +/- 20             | +/- 20                | V    |
| V <sub>B</sub>               | High side floating absolute supply voltage       | -0.3               | 225                   | V    |
| V <sub>s</sub>               | High side floating supply offset voltage         | V <sub>B</sub> -20 | V <sub>B</sub> +0.3   | V    |
| V <sub>CC</sub>              | Low Side fixed supply voltage                    | -0.3               | 25                    | V    |
| V <sub>Lo</sub>              | Low side output voltage                          | -0.3               | V <sub>CC</sub> +0.3V | V    |
| V <sub>HO</sub>              | High side output voltage                         | -0.3               | V <sub>CC</sub> +0.3V | V    |
| V <sub>IN</sub>              | Logic input voltage LIN, HIN                     | -0.3               | V <sub>CC</sub> +0.3V | V    |

Note1: Calculated based on maximum junction temperature. Bond wires current limit is 49A

**Main features**

Table 3 depicts the recommended operating conditions of IRSM005-800MH.

**Table 3 Recommended operating conditions of CIPOS™ Nano IRSM005-800MH**

| Symbol          | Description                              | Min                | Typ                | Max                | Unit |
|-----------------|------------------------------------------|--------------------|--------------------|--------------------|------|
| V <sub>B</sub>  | High Side Floating Supply Voltage        | V <sub>s</sub> +10 | V <sub>s</sub> +15 | V <sub>s</sub> +20 | V    |
| V <sub>s</sub>  | High Side Floating Supply Offset Voltage | Note1              | --                 | 100                | V    |
| V <sub>CC</sub> | Low Side and Logic fixed Supply Voltage  | 10                 | 15                 | 20                 | V    |
| L <sub>IN</sub> | Logic input Voltage LIN, HIN             | COM                | --                 | V <sub>CC</sub>    | V    |
| H <sub>IN</sub> | High side PWM pulse width                | 1                  | --                 | --                 | μs   |
| Dead time       | Suggested dead time between LIN and HIN  | 0.3                | 0.5                | --                 | μs   |

Table 4 shows the important specifications of the evaluation board EVAL-M1-05F804.

**Table 4 Eval-M1-05F804 board specifications**

| Parameters                         | Values                                                | Conditions / comments                                                                                                      |
|------------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Output Power</b>                |                                                       |                                                                                                                            |
| Watts (Note2)                      | 165W                                                  | IRSM005-800MH                                                                                                              |
| Current (Note2)                    | 10.5A**                                               | IRSM005-800MH<br>**rms, DcBus=35V, Fc=16kHz, 3-phase PWM, ΔTca=70C, Ta=25C                                                 |
| <b>Power device</b>                |                                                       |                                                                                                                            |
| IRSM005-301/800MH                  | 27L μIPM                                              |                                                                                                                            |
| <b>DC Bus voltage</b>              |                                                       |                                                                                                                            |
| Maximum DC bus voltage             | 36V                                                   | With IRSM005-800MH modules mounted                                                                                         |
| Minimum DC bus voltage             | 15V                                                   | Please use external VCC supply if IRSM005-800MH is mounted                                                                 |
| <b>Current feedback</b>            |                                                       |                                                                                                                            |
| Current sensing device Rs1,Rs2,Rs3 | 10 mΩ                                                 | Three leg shunt configuration is set. To implement single shunt, remove RS2 and RS3 and include R6 and R10 resistors (0 Ω) |
| <b>Protections</b>                 |                                                       |                                                                                                                            |
| Output current trip level          | 20A <sub>pk</sub>                                     | Configure by changing shunt resistors                                                                                      |
| <b>On board power supply</b>       |                                                       |                                                                                                                            |
| 3.3V                               | 3.3V+/-5%, Max 50mA                                   | Used for Eval-M1-05F804                                                                                                    |
| 15V                                | 15V+/-5%, Max 20mA                                    | Used for interface signals with control board and alarm signal (I_TRIP)                                                    |
| <b>PCB characteristics</b>         |                                                       |                                                                                                                            |
| Material                           | FR4, 1.6MM thickness<br>Copper thickness = 1oz (35um) |                                                                                                                            |

## EVAL-M1-05F804

### iMOTION™ Modular Application Design Kit



#### Main features

| Parameters | Values     | Conditions / comments |
|------------|------------|-----------------------|
| Dimension  | 118mmx85mm |                       |


#### System environment

|                     |        |                            |
|---------------------|--------|----------------------------|
| Ambient temperature | 0-70°C | 95%RH Max (Non-Condensing) |
|---------------------|--------|----------------------------|


Note 2: please refer to IRSM005-800MH datasheet and uIPM HB application note rev04 SR for data about maximum current and power, changing Fc, modulation,  $\Delta T_{ca}$ , use of a heat sink.

### Main features

Figure 3 and Figure 4 hint out the functional groups of the EVAL-M1-05F804 evaluation board.

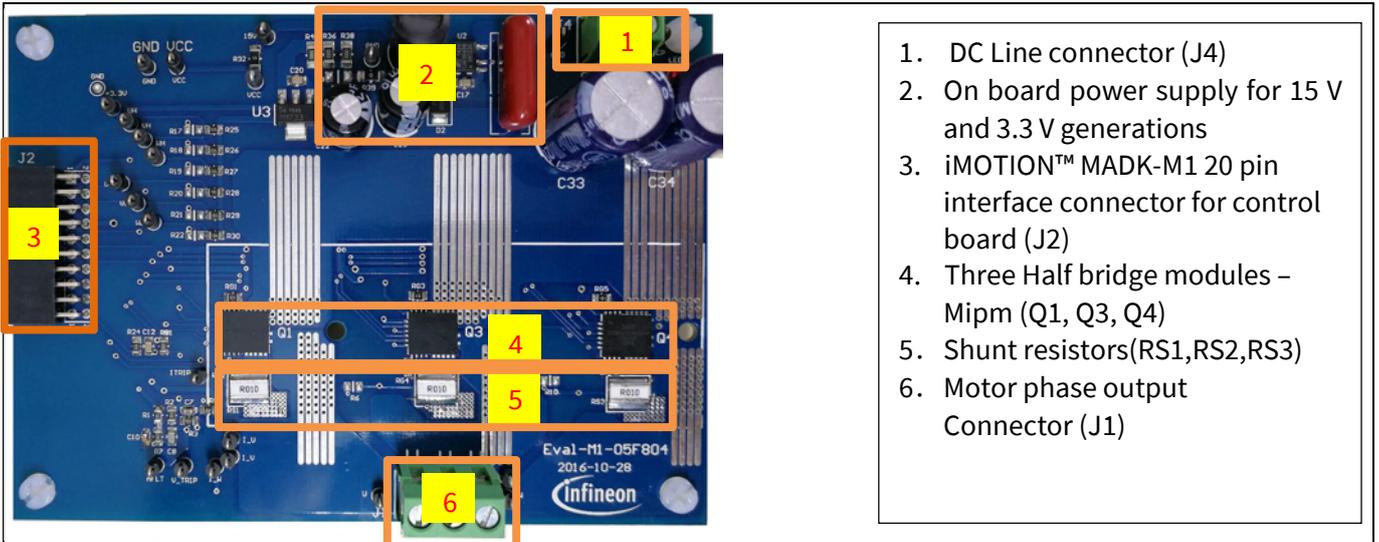

**Figure 3 Functional groups of the EVAL-M1-05F804 evaluation board's top side**

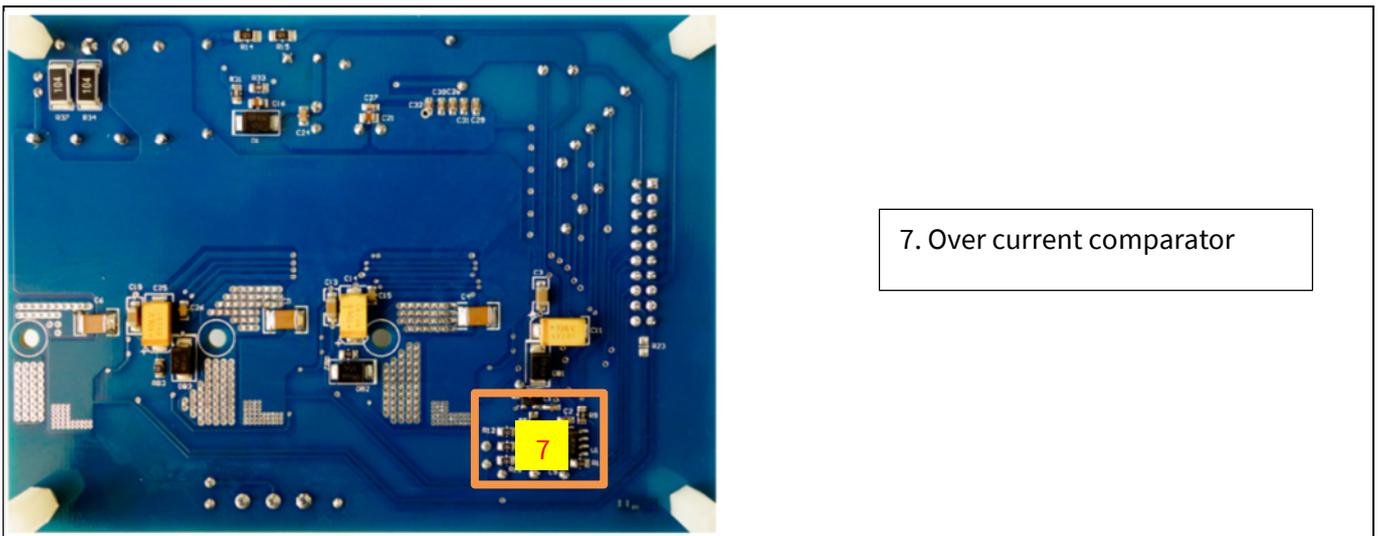

**Figure 4 Functional groups of the EVAL-M1-05F804 evaluation board's bottom side**

## 4 Pin assignments

General information about the connectors of the EVAL-M1-05F804 evaluation board is reported.

Table 5 Include the details of the DC input connector J4-DC.

Table 6 denotes the details of the motor side connector J1.

**Table 5 J4- DC input connector**

| S. No. | Pin | Details        |
|--------|-----|----------------|
| 1      | GND | DC - connector |
| 2      | DCP | DC + connector |

**Table 6 J1- Motor side connector**

| S. No. | Pin | Details                    |
|--------|-----|----------------------------|
| 1      | U   | Connected to motor phase U |
| 2      | V   | Connected to motor phase V |
| 3      | W   | Connected to motor phase W |

Table 7 provides the pin assignments of the iMOTION™ MADK-M1 20 pin interface connector J3. This connector is the interface to the power board.

**Table 7 J2- iMOTION™ MADK-M1 20 pin interface connector for power board**

| Pin | Name     | Pin Name Connectors                                            |
|-----|----------|----------------------------------------------------------------|
| 1   | PWMUH    | 3.3 V compatible logic input for high side gate driver-Phase U |
| 2   | GND      | Ground                                                         |
| 3   | PWMUL    | 3.3 V compatible logic input for low side gate driver-Phase U  |
| 4   | GND      | Ground                                                         |
| 5   | PWMVH    | 3.3 V compatible logic input for high side gate driver-Phase V |
| 6   | +3.3V    | 3.3V power supply                                              |
| 7   | PWMVL    | 3.3 V compatible logic input for low side gate driver-Phase V  |
| 8   | +3.3V    | 3.3V power supply                                              |
| 9   | PWMWH    | 3.3 V compatible logic input for high side gate driver-Phase W |
| 10  | IU+      | Shunt voltage phase U                                          |
| 11  | PWMWL    | 3.3 V compatible logic input for low side gate driver-Phase W  |
| 12  | IU-      | Ground                                                         |
| 13  | GK       | Gatekill                                                       |
| 14  | DCBSENSE | Input, DC bus voltage to AIN1 after 2Mohm registers            |
| 15  | VTH      | Input, Voltage input of Power Module's Temperature sense       |
| 16  | IV+      | Shunt voltage phase V                                          |
| 17  | IV-      | Ground                                                         |
| 18  | IW+      | Shunt voltage phase W                                          |
| 19  | IW-      | Ground                                                         |
| 20  | VCC      | Defined for 15 V Power Supply                                  |


## 5 Schematics and Layout

To meet individual customer requirements and make the EVAL-M1-05F804 evaluation board a basis for development or modification, all necessary technical data like schematics, layout and components are included in this chapter.

### 5.1 DC-Link Voltage Measurement

Pin 14 of connector J2 provides access to the DC-link voltage. Three possible feedback cases are associated with this pin.

Figure 5 provides the DC bus sense resistor details.




**Figure 5 DC bus sense resistor on EVAL-M1-05F804 evaluation board**

- If a pull down resistor of 4.87 kΩ referred to ground is inserted either on the Eval-M1-05F804 evaluation board or the additional control board, DCBSENSE positive voltage results scaled in the range of 0-3.3V on the pin.
- If no pull-down resistor of 4.87 kΩ is present on the Eval-M1-05F804 evaluation board or the additional control board, the DCBSENSE -pin remains high voltage (up to DC input).
- If no feedback is desired on the DCBSENSE-pin, please remove either R14 or R15 or both of them.

### 5.2 Inverter section using CIPOS™ Nano

The inverter section is implemented using the CIPOS™ Nano as sketched in Figure 6. Three half bridge modules as 3-phase inverter bridge section. Every half bridge module includes two power MOSFETs and one half bridge gate driver. The shunt resistor section is also given. The three capacitors C3, C13 and C19 are used as bootstrap capacitors to provide the necessary floating supply voltages VBU, VBV and VBW respectively.

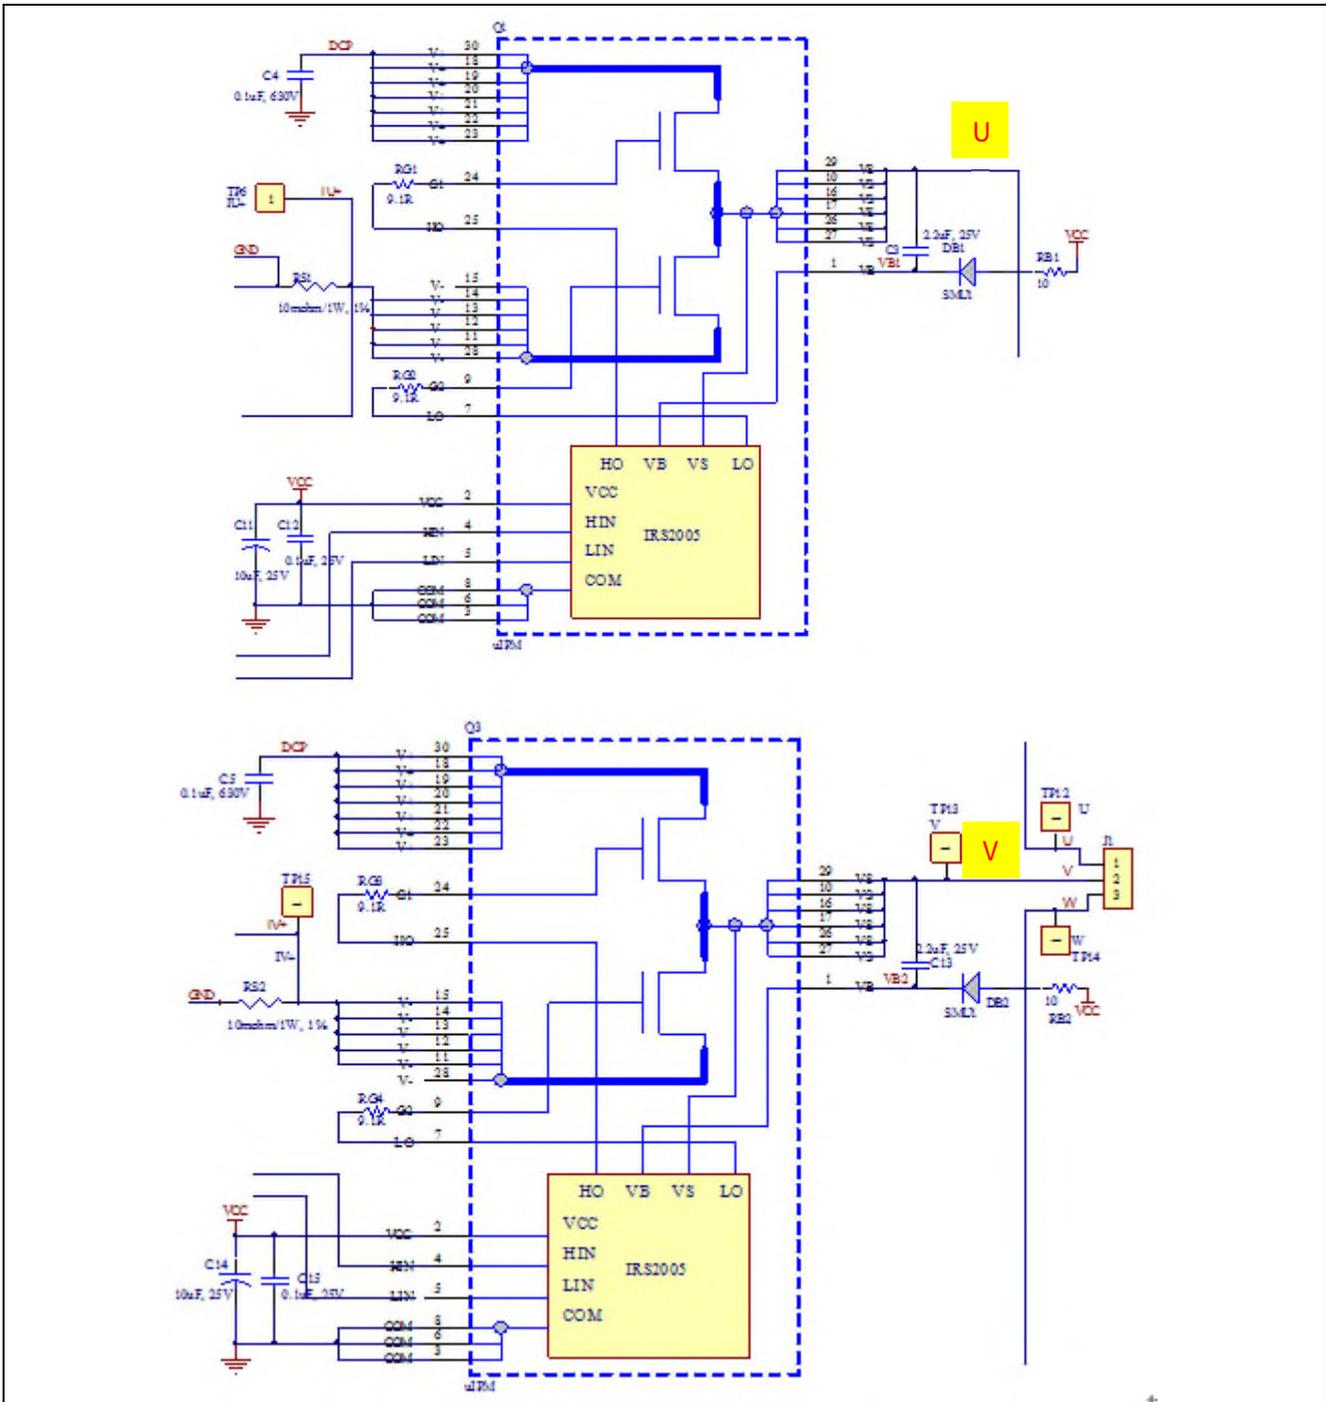



### 5.3 Power supply

Figure 7 depicts the schematic of the power supply available on the EVAL-M1-05F310 board. The circuit includes a LNK304 that is used to generate 15 V (VCC) directly from the DC bus. VCC is connected to the gate drivers inside the CIPOST™ Nano. The linear regulator IFX1117-ME V33 generates 3.3 V from VCC. The 3.3 V power supply is used in the over current comparator circuit. Led LED1 is used to signal whether the board is powered or not. Both, VCC and 3.3 V are also present on the 20 pin interface connector J2 to power circuitry on the controller board.

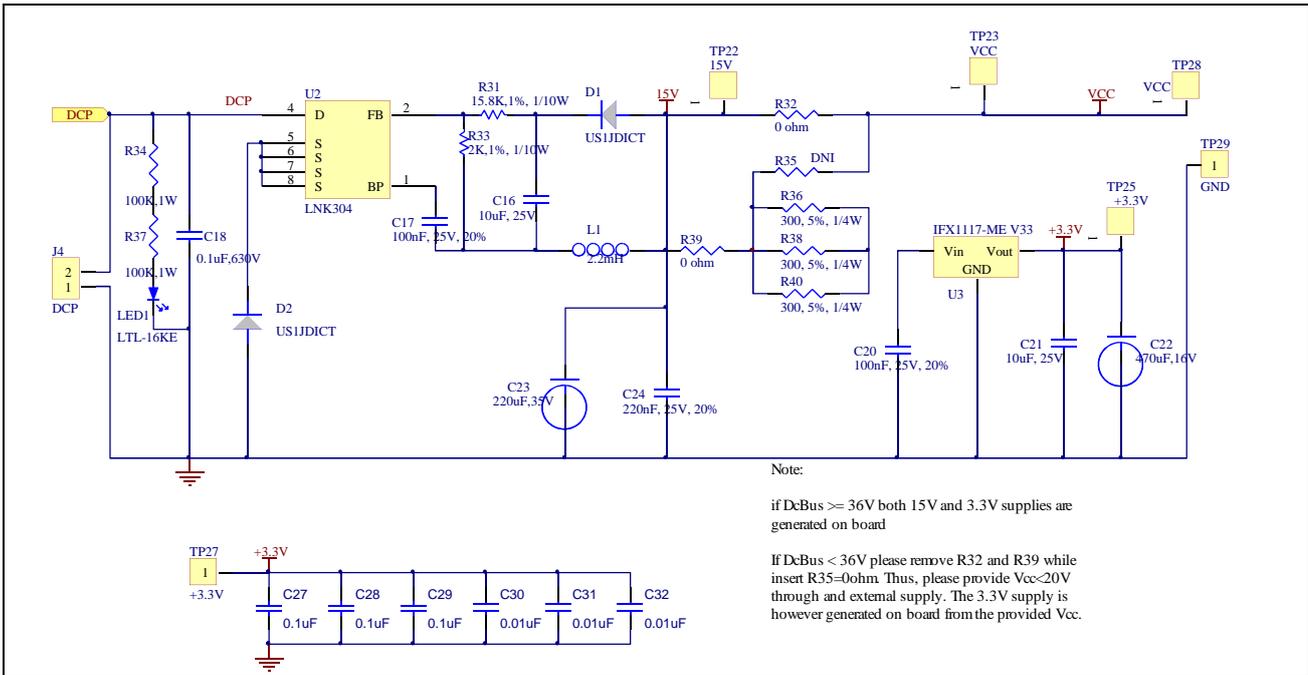


Figure 7 Power supply section of the EVAL-M1-05F804 evaluation board

### 5.4 Over current protection circuitry

Figure 8 displays the over current protection circuitry. The open collector output GK of the comparator is pulled up to 3.3V and filtered through resistor R2 and capacitor C8.

The comparator threshold can be set through the voltage divider provided by resistors R1 and R7. By default for emitter shunt trip, R7 is 660R 1%. In single shunt application R7 needs to be changed to 3.48kΩ.


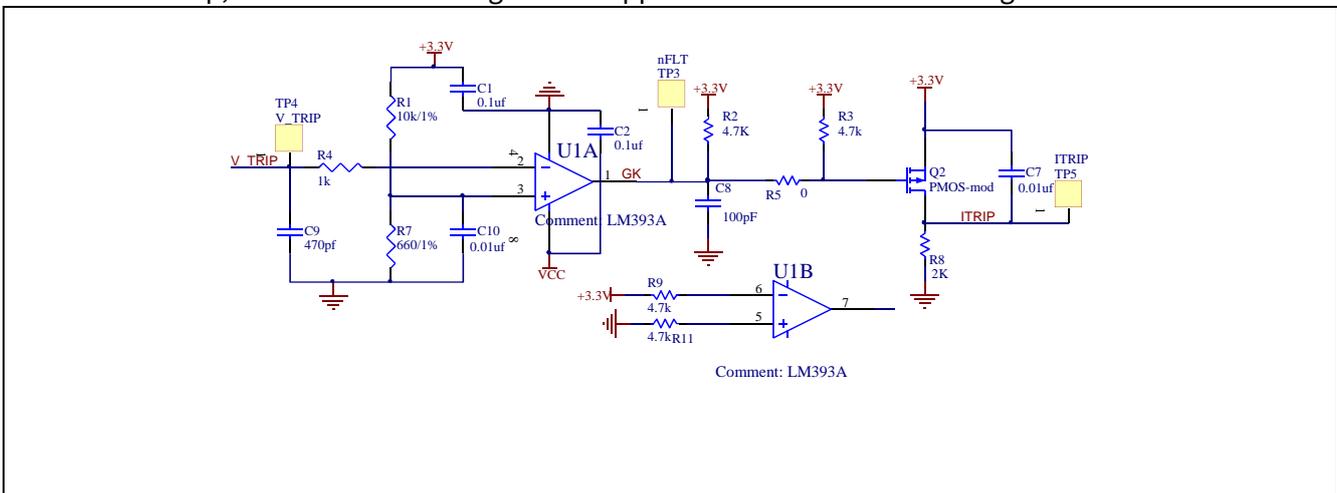


Figure 8 Over current protection circuit on the EVAL-M1-05F804 evaluation board

### 5.5 PCB Layout


The layout of this board can be used for different voltage or power classes of power board. The PCB has two electrical layers with 35µm copper by default and its size is 118 × 85mm. The PCB board thickness is 1.6mm. Get in contact with our technical support team to get more detailed information and the latest Gerber-files.

Figure 9 illustrates the top assembly print of the evaluation board.

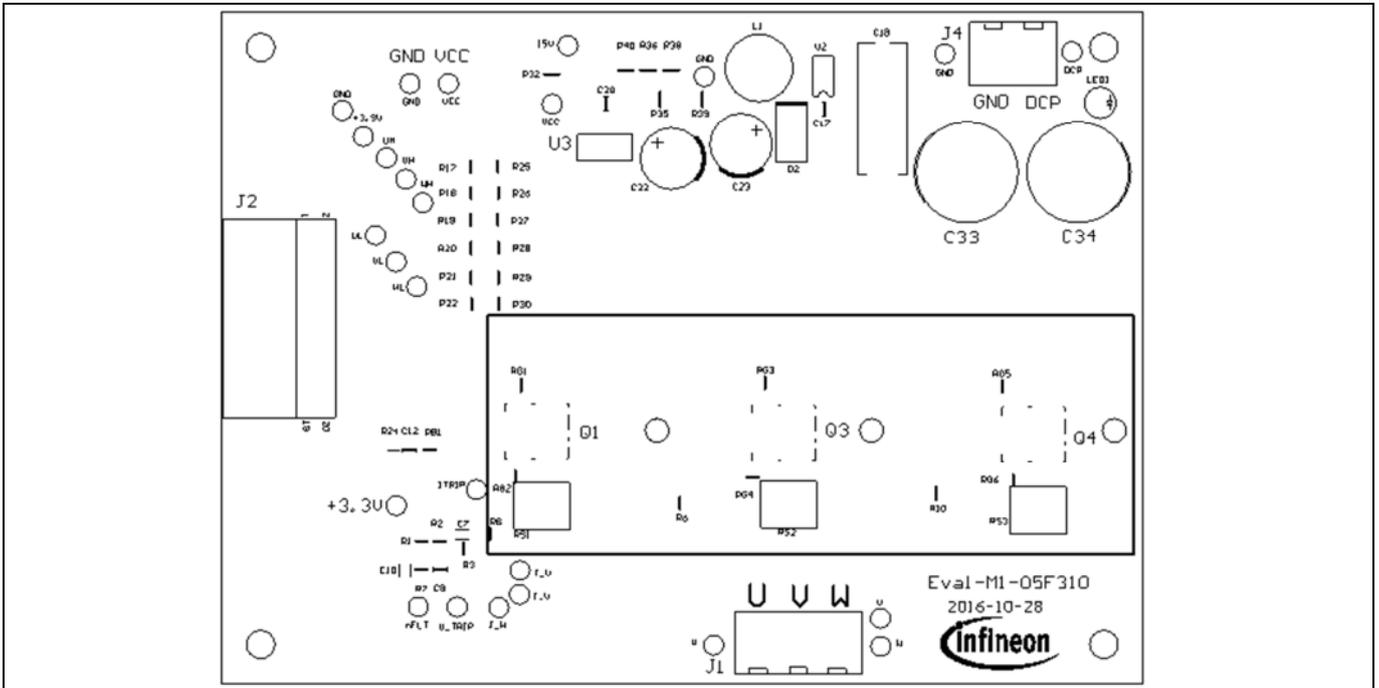


**Figure 9 Top assembly print of the EVAL-M1-05F804 evaluation board**

Figure 10 depicts the bottom assembly print of the evaluation board.

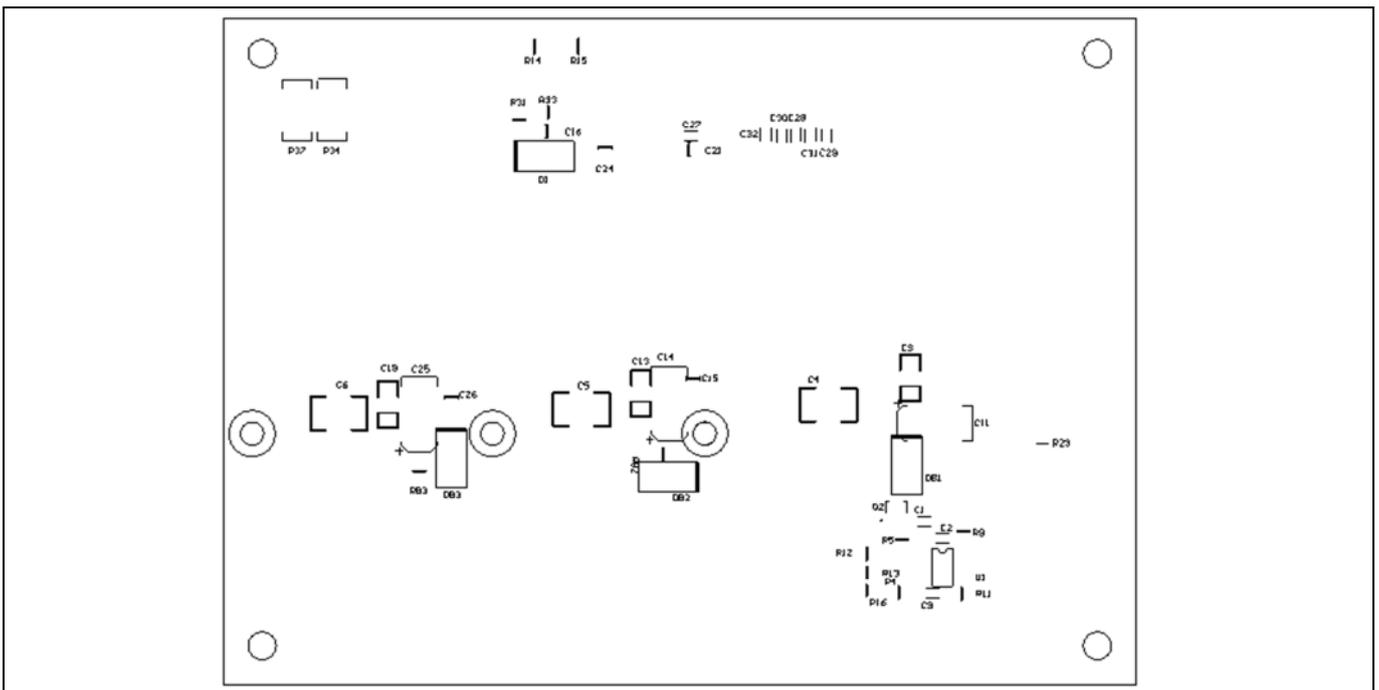


**Figure 10 Bottom assembly print of the EVAL-M1-05F804 evaluation board**

The top layer routing of the PCB is provided in the following Figure 11.

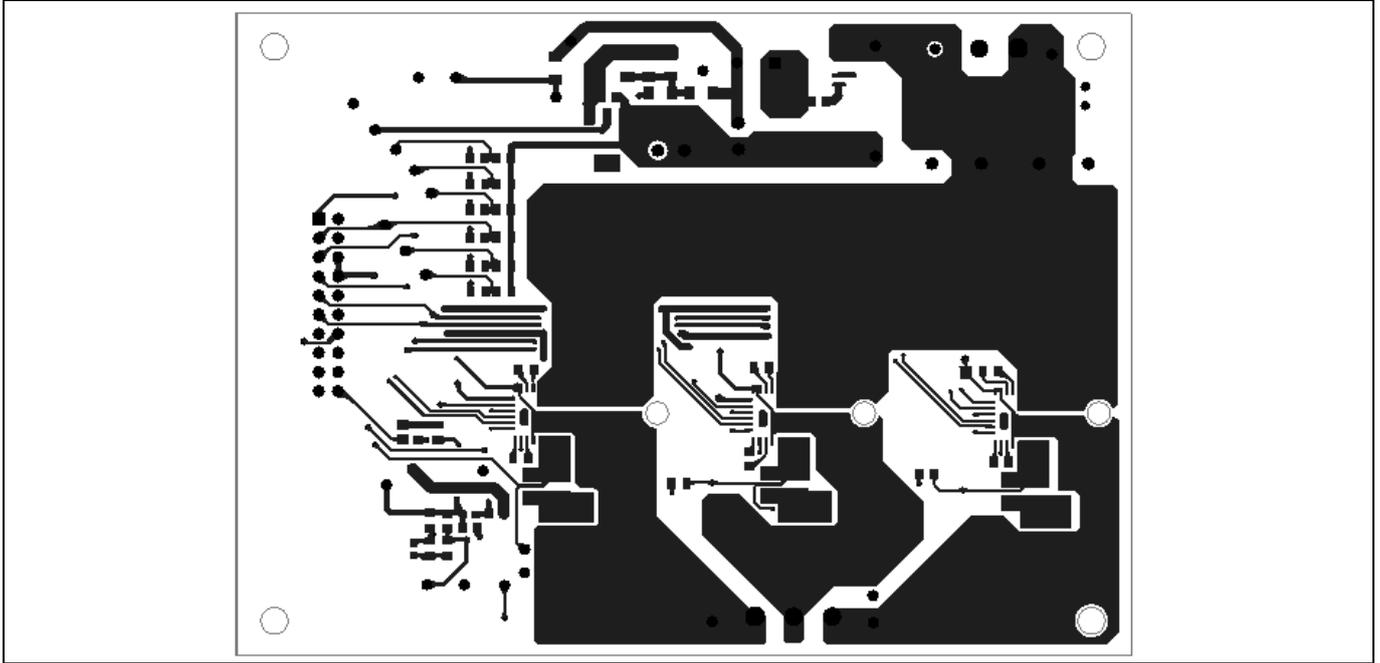

**Figure 11 Top layer routing of the EVAL-M1-05F804 evaluation board**

Figure 12 illustrates the bottom layer routing of the PCB.

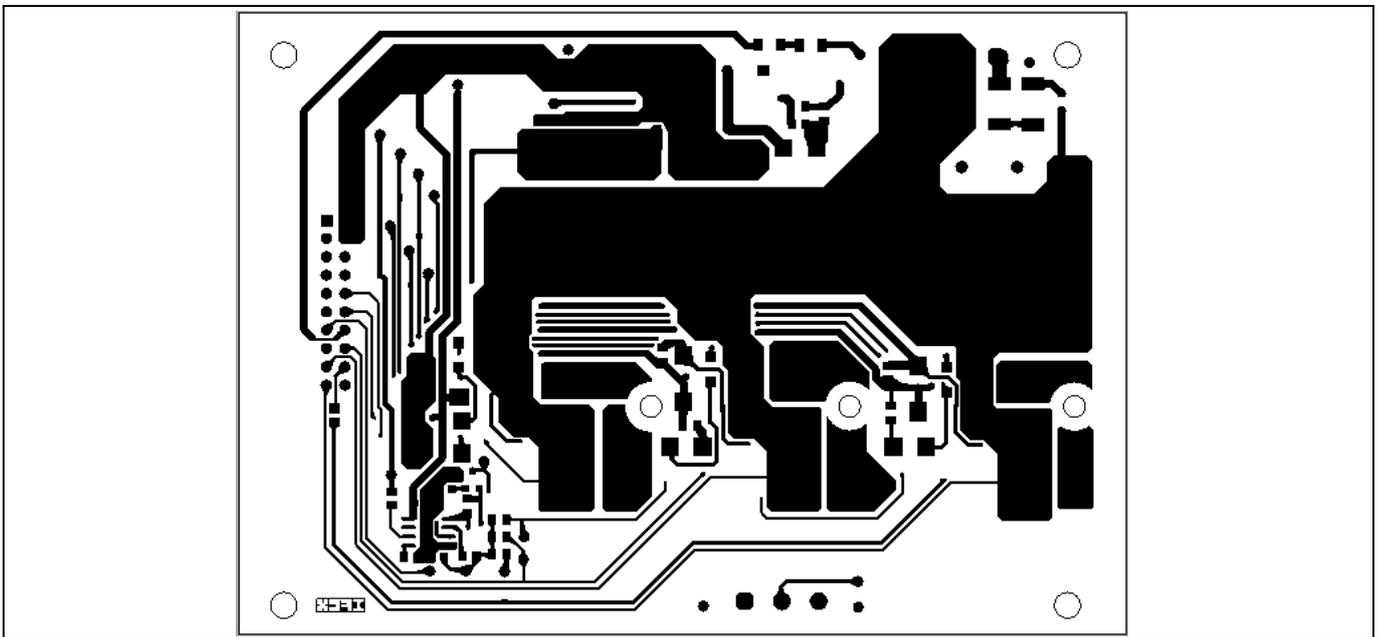

**Figure 12 Bottom layer routing of the EVAL-M1-05F804 evaluation board**

## 6 Bill of Materials of EVAL-M1-05F804

Table 8 provides the complete bill of materials for the EVAL-M1-05F804 board.

**Table 8 Bill of materials**

| No. | Qty. | Part description                 | Designator             | Part Number        | Manufacturer                    |
|-----|------|----------------------------------|------------------------|--------------------|---------------------------------|
| 1   | 5    | CAP CER 0.1μF 50V X7R 0603       | C1, C2, C27, C28, C29  | C0603C104M5RACTU   | Kemet                           |
| 2   | 3    | CAP CER 2.2μF 50V X7R 1206       | C3, C13, C19           | C1206C225K5RACAUTO | Kemet                           |
| 3   | 3    | CAP CER 0.1μF 630V X7R 1812      | C4, C5, C6             | C1812C104KBRACTU   | Kemet                           |
| 4   | 5    | CAP CER 10000pF 50V X7R 0603     | C7, C10, C30, C31, C32 | C0603C103K5RACTU   | Kemet                           |
| 5   | 1    | CAP CER 100pF 50V NP0 0805       | C8                     | C0805C101J5GACTU   | Kemet                           |
| 6   | 1    | CAP CER 470pF 50V X7R 0805       | C9                     | C0805C471K5RACTU   | Kemet                           |
| 7   | 3    | CAP TANT 10μF 25V 10% 2917       | C11, C14, C25          | T491D106K025AT     | Kemet                           |
| 8   | 2    | CAP CER 10μF 25V X5R 0805        | C16, C21               | C0805C106M3PAC7800 | Kemet                           |
| 9   | 1    | CAP FILM 0.1μF 10% 630VDC RADIAL | C18                    | ECQ-E6104KFW       | Panasonic Electronic Components |
| 10  | 3    | CAP CER 0.1μF 25V X7R 0805       | C12, C15, C26          | C0805C104K3RACTU   | Kemet                           |
| 11  | 1    | CAP ALUM 470μF 20% 16V RADIAL    | C22                    | 16ZLH470MEFC8X11.5 | Rubycon                         |
| 12  | 2    | CAP CER 0.1μF 25V X7R 0805       | C17, C20               | C0805C104K3RACTU   | Kemet                           |
| 13  | 1    | CAP ALUM 220μF 20% 35V RADIAL    | C23                    | 35ZLH220MEFC8X11.5 | Rubycon                         |
| 14  | 2    | CAP ALUM 220μF 20% 100V RADIAL   | C33,C34                | ECA-2AM221         | Panasonic Electronic Components |
| 15  | 1    | CAP CER 0.22μF 16V X7R 0805      | C24                    | C0805C224K4RACTU   | Kemet                           |
| 16  | 5    | DIODE GEN PURP 600V 1A SMB       | D1, D2, 'DB1, DB2, DB3 | MURS160-13-F       | Yageo                           |
| 17  | 1    | CONN FEMALE 20POS DL .1" R/A TIN | J2                     | PPTC102LJBN-RC     | Sullins Connector Solutions     |
| 18  | 1    | TERM BLOCK 5.08MM 3POS SIDE ENTY | J1                     | 282837-3           | TE Connectivity AMP Connectors  |
| 19  | 1    | TERM BLOCK 5.08MM                | J4                     | 282837-2           | TE Connectivity                 |

**EVAL-M1-05F804****iMOTION™ Modular Application Design Kit****Bill of Materials of EVAL-M1-05F804**

| No. | Qty. | Part description                               | Designator                                         | Part Number        | Manufacturer                          |
|-----|------|------------------------------------------------|----------------------------------------------------|--------------------|---------------------------------------|
|     |      | 2POS SIDE ENTY                                 |                                                    |                    | AMP Connectors                        |
| 20  | 1    | FIXED IND 2.2MH<br>THROUGH HOLE                | L1                                                 | RLB0914-222KL      | Bourns Inc                            |
| 21  | 1    | LED RED DIFF 3MM<br>ROUND T/H                  | LED1                                               | LTL-16KE           | Lite-On Inc                           |
| 22  | 3    | IRSM005-<br>301MH/IRSM005-800MH                | Q1, Q3, Q4                                         | Half Bridge Module | Infineon<br>Technologies              |
| 23  | 1    | IRLNL6402TRPBF-1                               | Q2                                                 | P-Channel MOSFET   | Infineon<br>Technologies              |
| 24  | 1    | RES SMD 10 kΩ1% 1/8W<br>0805                   | R1                                                 | ERJ-6ENF1002V      | Panasonic<br>Electronic<br>Components |
| 25  | 10   | RES SMD 4.7 kΩ1% 1/8W<br>0805                  | R2, R3, R9, R11, R25,<br>R26, R27, R28, R29, R30   | ERJ-6ENF4701V      | Panasonic<br>Electronic<br>Components |
| 26  | 4    | RES SMD 1 kΩ1% 1/8W<br>0805                    | R4, R12, R13, R16                                  | ERJ-6ENF1001V      | Panasonic<br>Electronic<br>Components |
| 27  | 10   | DIN                                            | R6, R10, R17, R18, R19,<br>R20, R21, R22, R23, R24 | R0805              | Yageo                                 |
| 28  | 2    | RES SMD 2 kΩ1% 1/8W<br>0805                    | R8,R33                                             | RC0805FR-072KL     | Yageo                                 |
| 29  | 2    | RES SMD 1M Ω 1% 1/8W<br>0805                   | R14,R15                                            | REJ-6ENF1004V      | Panasonic<br>Electronic<br>Components |
| 30  | 1    | RES SMD 15.8 kΩ1%<br>1/8W 0805                 | R31                                                | RC0805FR-0715K8L   | Yageo                                 |
| 31  | 2    | RES SMD 0.0 OHM<br>JUMPER 1/4W 1206 NO<br>ASS. | R32,R39                                            | RMCF1206ZT0R00     | Stackpole<br>Electronics Inc.         |
| 32  | 2    | RES SMD 100 kΩ5% 1W<br>2512                    | R34, R37                                           | ERJ-1TYJ104U       | Panasonic<br>Electronic<br>Components |
| 33  | 1    | DIN                                            | R35                                                | R1206              | Yageo                                 |
| 34  | 3    | RES SMD 300 Ω 5% 1/4W<br>1206                  | R36, R38, R40                                      | RC1206JR-07300RL   | Yageo                                 |
| 35  | 3    | RES SMD 10 Ω 5% 1/8W<br>0805                   | RB1, RB2, RB3                                      | ERJ-6GEYJ100V      | Panasonic<br>Electronic<br>Components |
| 36  | 6    | RES SMD 100 Ω 5% 1/8W<br>0805                  | RG1, RG2, RG3, RG4,<br>RG5, RG6                    | ERJ-6GEYJ101V      | Panasonic<br>Electronic<br>Components |
| 37  | 3    | 1225 1% TCR150 0.01Ω                           | RS1, RS2, RS3                                      | CS25FTFR010N       | Viking                                |
| 38  | 15   | TEST POINT PC                                  | DCP, ITRIP,                                        | 5002               | Keystone                              |

**EVAL-M1-05F804****iMOTION™ Modular Application Design Kit****Bill of Materials of EVAL-M1-05F804**

| No. | Qty. | Part description                        | Designator                                    | Part Number    | Manufacturer             |
|-----|------|-----------------------------------------|-----------------------------------------------|----------------|--------------------------|
|     |      | MINI .040"D BLACK                       | GND,U,V,W,UH,VH,WH,<br>UL,VL,WL,15V,VCC,+3.3V |                | Electronics              |
| 39  | 1    | IC DUAL DIFF<br>COMPARATOR 8-SOIC       | U1                                            | LM393ADR       | Texas<br>Instruments     |
| 40  | 1    | IC OFFLINE SWIT OCP<br>8SOIC            | U2                                            | LNK304DN       | Power<br>Integrations    |
| 41  | 1    | Wide Input Range Low<br>Noise 500mA LDO | U3                                            | IFX1763XEJ V33 | Infineon<br>Technologies |



## **7 Reference**

[1] Datasheet of Infineon IRSM005-301MH/IRSM005-800MH-CIPOS™ Nano, is available for download on Infineon's website

[2] Application Note of AN2016-24 for EVAL-M1-05-65D power board, is available for download on Infineon's website

## Revision History

### Major changes since the last revision

| <b>Version number</b> | <b>Revision Date</b> | <b>Revision description</b> |
|-----------------------|----------------------|-----------------------------|
| 1.0                   | 2017-02-28           | First release               |
|                       |                      |                             |
|                       |                      |                             |

#### Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CoolGaN™, CoolMOS™, CoolSET™, CoolSiC™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, Infineon™, ISOFACE™, IsoPACK™, i-Wafer™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OmniTune™, OPTIGA™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, ReverSave™, SatRIC™, SIEGET™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, SPOC™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Trademarks updated August 2015

#### Other Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition <2017-02-28>**

**Published by**  
**Infineon Technologies AG**  
**81726 Munich, Germany**

**© 2017 Infineon Technologies AG.**  
**All Rights Reserved.**

**Do you have a question about this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**AN2017-10 EVAL-M1-05F804**  
**Document reference**

#### IMPORTANT NOTICE

The information contained in this application note is given as a hint for the implementation of the product only and shall in no event be regarded as a description or warranty of a certain functionality, condition or quality of the product. Before implementation of the product, the recipient of this application note must verify any function and other technical information given herein in the real application. Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind (including without limitation warranties of non-infringement of intellectual property rights of any third party) with respect to any and all information given in this application note.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

Please note that this product is not qualified according to the AEC Q100 or AEC Q101 documents of the Automotive Electronics Council.

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.