

1. Description


1.1. Project

Project Name	debug_all_demo
Board Name	debug_all_demo
Generated with:	STM32CubeMX 4.25.1
Date	11/22/2018

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

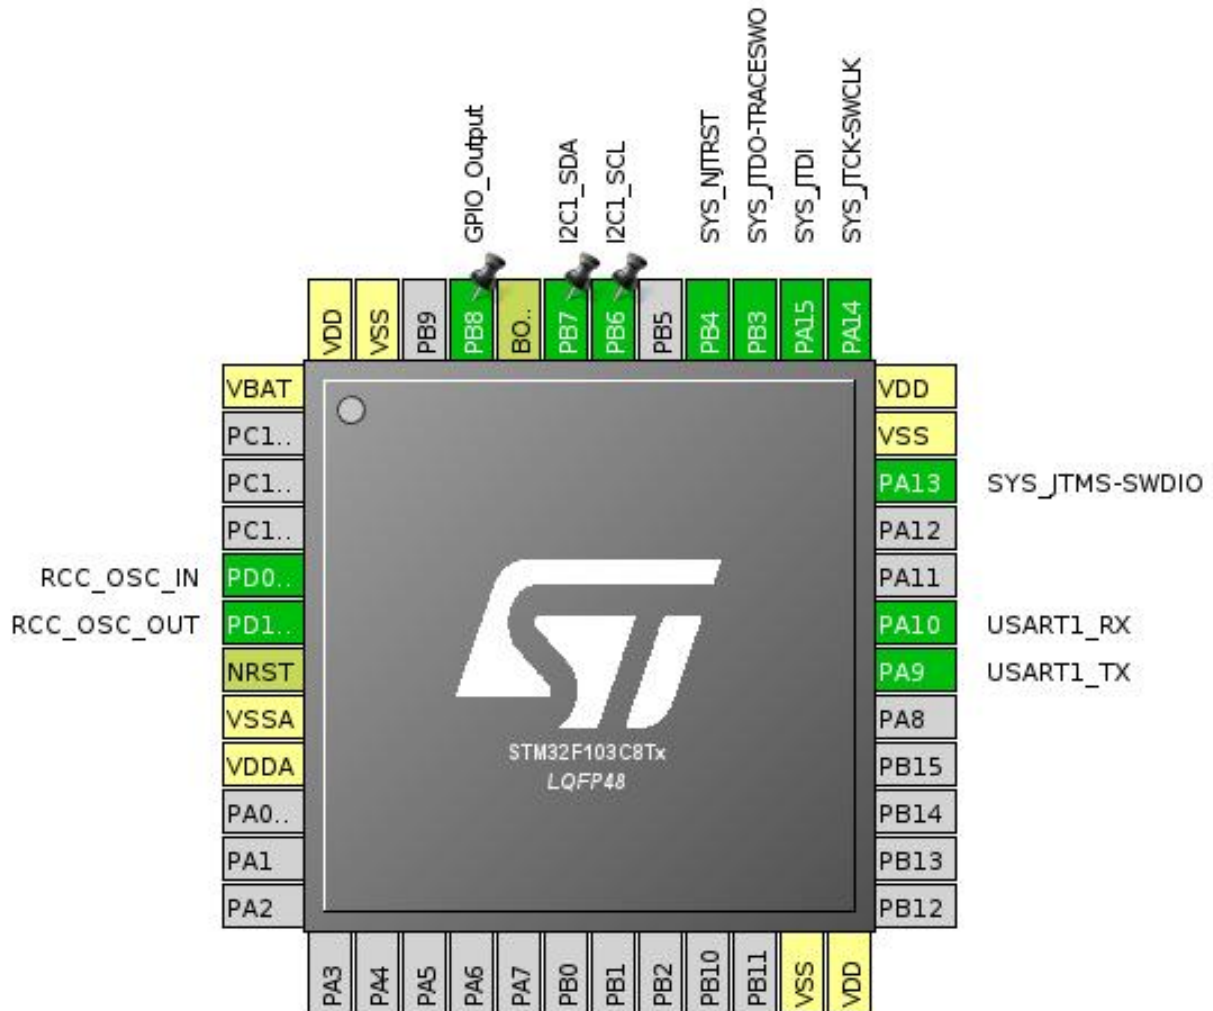


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
23	VSS	Power		
24	VDD	Power		
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
38	PA15	I/O	SYS_JTDI	
39	PB3	I/O	SYS_JTDO-TRACESWO	
40	PB4	I/O	SYS_NJTRST	
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
45	PB8 *	I/O	GPIO_Output	
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

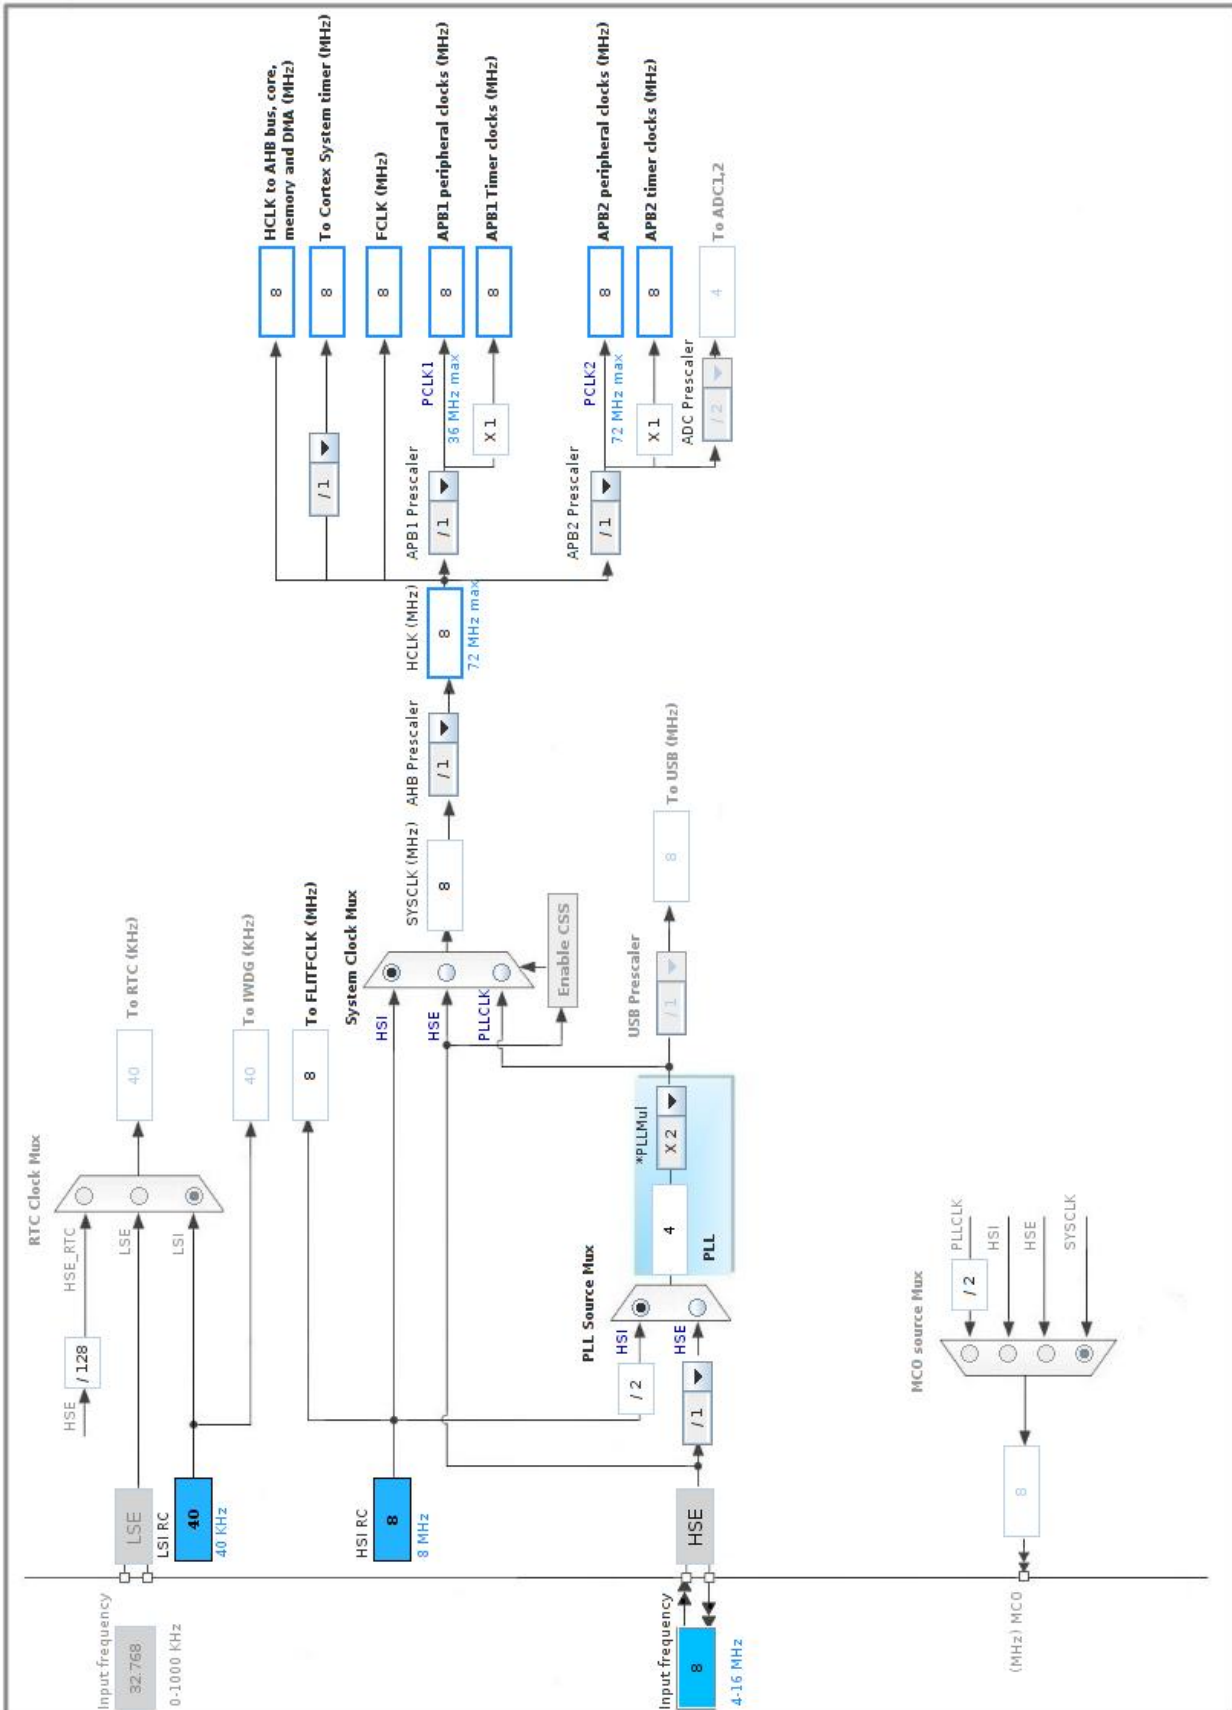

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0x27 *
General Call address detection	Disabled

5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

5.3. SYS

Debug: JTAG (5 pins)

Timebase Source: SysTick

5.4. USART1

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	n/a	High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	n/a	High *	
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PA15	SYS_JTDI	n/a	n/a	n/a	
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	
	PB4	SYS_NJTRST	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PB8	GPIO_Output	Output Push Pull	n/a	Low	

6.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_TX	DMA1_Channel4	Memory To Peripheral	Low

USART1_TX: DMA1_Channel4 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel4 global interrupt	true	0	0
USART1 global interrupt	true	0	0
PVD interrupt through EXTI line 16		unused	
Flash global interrupt		unused	
RCC global interrupt		unused	
I2C1 event interrupt		unused	
I2C1 error interrupt		unused	

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

7.2. Parameter Selection

Temperature	25
Vdd	3.3

8. Software Pack Report

9. Software Project

9.1. Project Settings

Name	Value
Project Name	debug_all_demo
Project Folder	/home/potter/git/gcc_development/production/projects/stm32f10x/debug_all_dem
Toolchain / IDE	Makefile
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

9.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No