


20mm Lithium Coin Cell Battery Holders

Thru Hole Mount (THM)

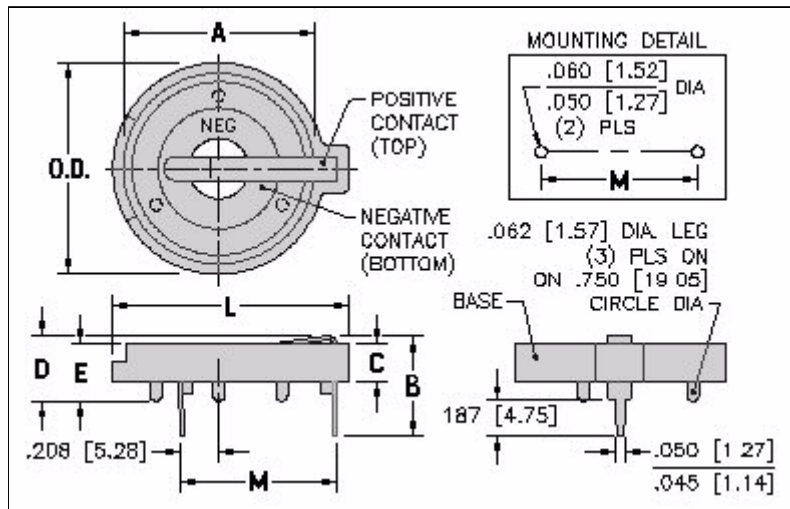

| Cat. No. | Cells | Dims. | A | B | C | D | E | L | O.D. | M |
|---|-------|-------|-------|---|------|-------|-------|-------|-------|-------|
| 103 | One | inch | .796 | .513 | .195 | .335 | .295 | 1.130 | .896 | .807 |
| | | mm | 20,22 | 13,03 | 4,95 | 8,51 | 7,49 | 28,70 | 22,75 | 20,50 |
| 106 | One | inch | .796 | .513 | .195 | .335 | .295 | 1.219 | 1.093 | .807 |
| | | mm | 20,22 | 13,03 | 4,95 | 8,51 | 7,49 | 30,96 | 27,76 | 20,50 |
| 1026 | Two | inch | .796 | .630 | .312 | .452 | .412 | 1.219 | 1.093 | .807 |
| | | mm | 20,22 | 16,00 | 7,92 | 11,48 | 10,46 | 30,96 | 27,76 | 20,50 |
| Positive & Negative Contacts: .020" (0,5mm) Spring Steel, Tin Nickel Plate | | | | | | | | | | |
| Base Material: PBT UL 94V-0, Black | | | | Temp. Range: -60°F to +293°F (-50°C to +145°C) | | | | | | |

| Battery Cross Reference |
|--|
| Duracell, Eveready, Panasonic, Sony, Toshiba, Varta, Ray-O-Vac, Sanyo, Seiko |
| BR2016, CR2016, DL2016, BR2020, CL2020, BR2025 CR2025, DL2025, BR2032, CR2032, DL2032 |