




**High capacity  
PhotoMOS Relay.  
(Load current Max. 4A)  
DC load type is available.**

**Power PhotoMOS  
(AQZ10○, 20○)**



AC/DC type



DC type

## FEATURES

1. High capacity PhotoMOS Relay in a compact and slim 4-pin SIL
2. Extremely low ON resistance
3. Control low-level signal  
Power Photo MOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
4. Low-level off state leakage current
5. High I/O isolation voltage 2,500 V
6. Eliminates the need for a counter electromotive protection diode in the drive circuit on the input side
7. Eliminate the need for a power supply to drive the power MOSFET
8. PC board layout is simplified
9. No restriction on mounting direction
10. Varistor incorporated type is also available.

## TYPICAL APPLICATIONS

- High-speed inspection machines
- IC checker
- NC machine, Robots
- Office machines
- Telecommunication
- Automotive

## TYPES

### 1. AC/DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	3.0 A	AQZ202	25 pcs.	500 pcs.
100 V	2.0 A	AQZ205		
200 V	1.0 A	AQZ207		
400 V	0.5 A	AQZ204		

### 2. DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	4.0 A	AQZ102	25 pcs.	500 pcs.
100 V	2.6 A	AQZ105		
200 V	1.3 A	AQZ107		
400 V	0.7 A	AQZ104		

Notes: Load voltage and current of AC/DC type: Peak AC/DC.

Load voltage and current of DC type: DC

# Power PhotoMOS (AQZ10○, 20○)

## RATING

### 1. AC/DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA				
	LED reverse voltage	V <sub>R</sub>	5 V				
	Peak forward current	I <sub>FP</sub>	1 A				f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW				
Output	Load voltage (Peak AC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	
	Continuous load current	I <sub>L</sub>	3.0 A	2.0 A	1.0 A	0.5 A	
	Peak load current	I <sub>peak</sub>	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	1.6 W				
Total power dissipation		P <sub>T</sub>	1.6 W				
I/O isolation voltage		V <sub>iso</sub>	2,500 V AC				
Temperature limits	Operating	T <sub>opr</sub>	−40°C to +85°C −40°F to +185°F		Non-condensing at low temperatures		
	Storage	T <sub>stg</sub>	−40°C to +100°C −40°F to +212°F				


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Condition
Input	LED operate current	Typical	I <sub>Fon</sub>	1.0 mA		I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
		Maximum		3.0 mA			
	LED turn off current	Minimum	I <sub>Foff</sub>	0.4 mA		I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
		Typical		0.9 mA			
Output	LED dropout voltage	Typical	V <sub>F</sub>	1.25 V (1.16 V at I <sub>F</sub> = 10 mA)		I <sub>F</sub> = 50 mA	
		Maximum		1.5 V			
	On resistance	Typical	R <sub>on</sub>	0.11 Ω	0.23 Ω	0.7 Ω	2.1 Ω
		Maximum		0.18 Ω	0.34 Ω	1.1 Ω	3.2 Ω
	Off state leakage current	Maximum	—	10 μA		I <sub>F</sub> = 0 mA V <sub>L</sub> = Max.	
Transfer characteristics	Switching speed	Turn on time*	T <sub>on</sub>	2.46 ms	2.40 ms	1.12 ms	1.65 ms
				5.0 ms		I <sub>F</sub> = 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
		Typical		5.64 ms	5.65 ms	2.57 ms	3.88 ms
		Maximum		10.0 ms		I <sub>F</sub> = 5 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
	Turn off time*	Typical	T <sub>off</sub>	0.22 ms	0.21 ms	0.10 ms	0.08 ms
		Maximum		3.0 ms		I <sub>F</sub> = 5 mA or 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
	I/O capacitance	Typical	C <sub>iso</sub>	0.8 pF		f = 1 MHz V <sub>B</sub> = 0 V	
	Maximum	Maximum		1.5 pF			
Initial I/O isolation resistance		Minimum	R <sub>iso</sub>	1,000 MΩ		500 V DC	
Maximum operating speed		Maximum	—	0.5 cps		I <sub>F</sub> = 10 mA Duty factor = 50% I <sub>L</sub> = Max., V <sub>L</sub> = Max.	
Vibration resistance		Minimum	—	10 to 55 Hz at double amplitude of 3 mm		2 hours for 3 axes	
Shock resistance		Minimum	—	4,900 m/s <sup>2</sup> (500 G) 1 ms		3 times for 3 axes	

Note: Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

Type of connection

\*Turn on/off time

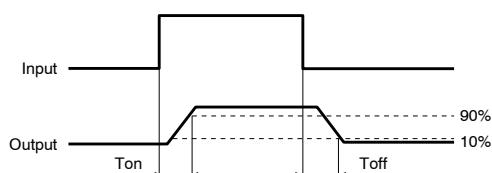

# Power PhotoMOS (AQZ10○, 20○)

## 2. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA				
	LED reverse voltage	V <sub>R</sub>	5 V				
	Peak forward current	I <sub>FP</sub>	1 A		f = 100 Hz, Duty factor = 0.1%		
	Power dissipation	P <sub>in</sub>	75 mW				
Output	Load voltage (DC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	
	Continuous load current (DC)	I <sub>L</sub>	4.0 A	2.6 A	1.3 A	0.7 A	
	Peak load current	I <sub>peak</sub>	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	1.35 W				
Total power dissipation		P <sub>T</sub>	1.35 W				
I/O isolation voltage		V <sub>iso</sub>	2,500 V AC				
Temperature limits	Operating	T <sub>opr</sub>	−40°C to +85°C −40°F to +185°F		Non-condensing at low temperatures		
	Storage	T <sub>stg</sub>	−40°C to +100°C −40°F to +212°F				


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Condition			
Input	LED operate current		I <sub>Fon</sub>	1.0 mA			I <sub>F</sub> = 100 mA V <sub>L</sub> = 10 V				
	Typical	3.0 mA									
	LED turn off current		I <sub>off</sub>	0.4 mA			I <sub>F</sub> = 100 mA V <sub>L</sub> = 10 V				
	Typical	0.9 mA									
Output	LED dropout voltage		V <sub>F</sub>	1.25 V (1.16 V at I <sub>F</sub> = 10 mA)			I <sub>F</sub> = 50 mA				
	Typical	1.5 V									
	On resistance		R <sub>on</sub>	0.05 Ω	0.081 Ω	0.34 Ω	1.06 Ω	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max. Within 1 s on time			
	Maximum	0.09 Ω		0.17 Ω	0.55 Ω	1.6 Ω					
Transfer characteristics	Off state leakage current		—	10 μA				I <sub>F</sub> = 0 mA V <sub>L</sub> = Max.			
	Switching speed	Turn on time*	T <sub>on</sub>	1.66 ms	1.89 ms	0.83 ms	1.01 ms	I <sub>F</sub> = 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V			
				5.0 ms							
				3.79 ms	4.50 ms	1.75 ms	2.34 ms	I <sub>F</sub> = 5 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V			
		Turn off time*	T <sub>off</sub>	10.0 ms							
				0.15 ms	0.19 ms	0.08 ms	0.08 ms	I <sub>F</sub> = 5 mA or 10 mA I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V			
	I/O capacitance		C <sub>iso</sub>	0.8 pF			f = 1 MHz V <sub>B</sub> = 0 V				
	Maximum operating speed			1.5 pF							
	Initial I/O isolation resistance		R <sub>iso</sub>	1,000 MΩ			500 V DC				
	Minimum		—	0.5 cps			I <sub>F</sub> = 10 mA Duty factor = 50% I <sub>L</sub> × V <sub>L</sub> = 200 (VA)				
Vibration resistance			Minimum	10 to 55 Hz at double amplitude of 3 mm			2 hours for 3 axes				
Shock resistance			Minimum	4,900 m/s <sup>2</sup> {500 G} 1 ms			3 times for 3 axes				

Note: Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

Type of connection

\*Turn on/off time

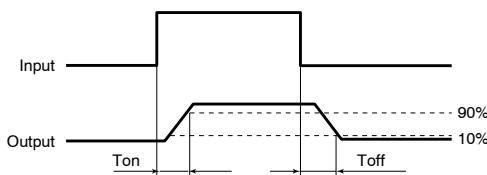


- Dimensions
- Schematic and Wiring Diagrams
- Cautions for Use

# Power PhotoMOS (AQZ10○, 20○)

## REFERENCE DATA


### 1.-{(1)} Load current vs. ambient temperature characteristics (AC/DC type)

Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

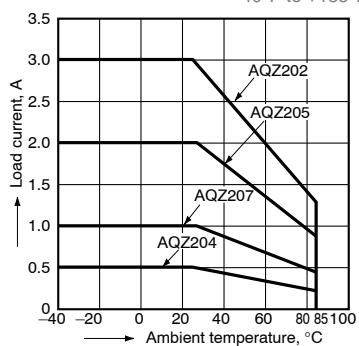


### 1.-{(2)} Load current vs. ambient temperature characteristics (DC type)

Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

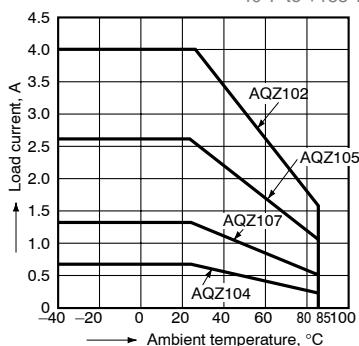


### 2. Load current vs. ambient temperature characteristics in adjacent mounting

$I_L$ : Load current;  
 $I_L(\text{max.})$ : Maximum continuous load current

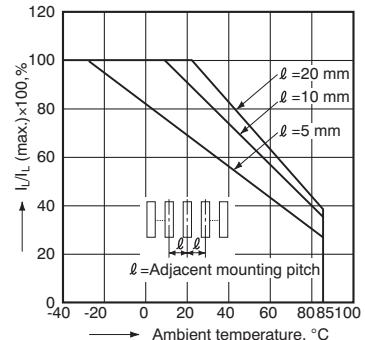


### 3.-{(1)} On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current: 1.2 A (DC) (AQZ202),  
0.8 A (DC) (AQZ205),  
1.6 A (DC) (AQZ102),  
1.04 A (DC) (AQZ105)

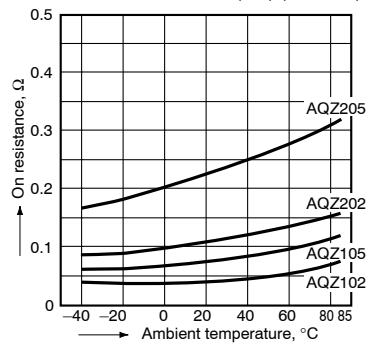


### 3.-{(2)} On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current: 0.4 A (DC) (AQZ207),  
0.2 A (DC) (AQZ204),  
0.52 A (DC) (AQZ107),  
0.28 A (DC) (AQZ104)

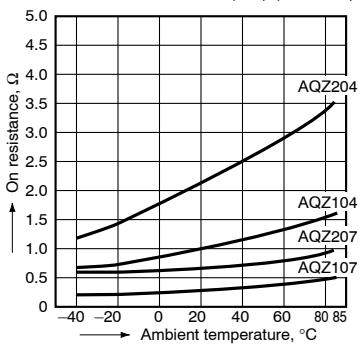


### 4.-{(1)} Turn on time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

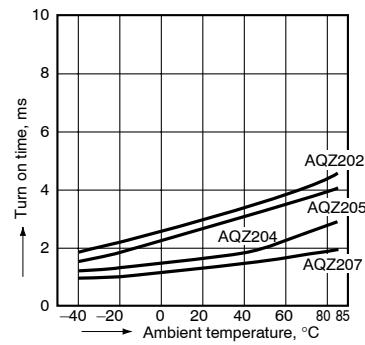


### 4.-{(2)} Turn on time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)




### 5.-{(1)} Turn off time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

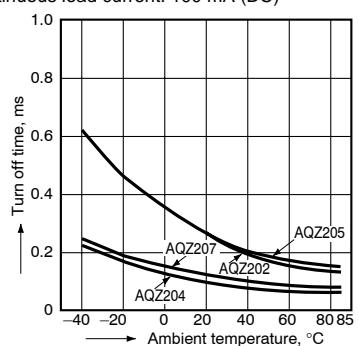


### 5.-{(2)} Turn off time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

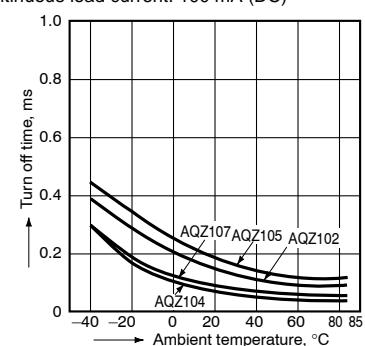


### 6.-{(1)} LED operate vs. ambient temperature characteristics (AC/DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

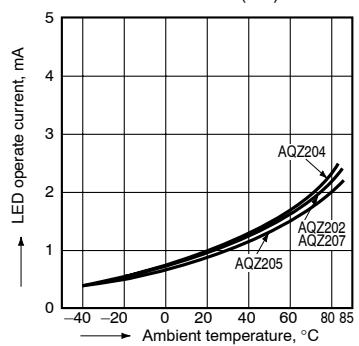


### 6.-{(2)} LED operate vs. ambient temperature characteristics (DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

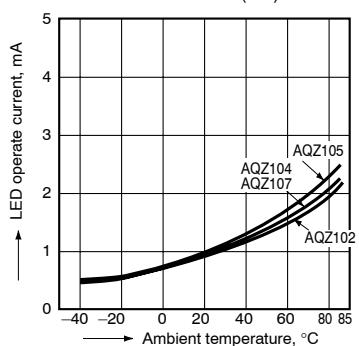


### 7.-{(1)} LED turn off current vs. ambient temperature characteristics (AC/DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

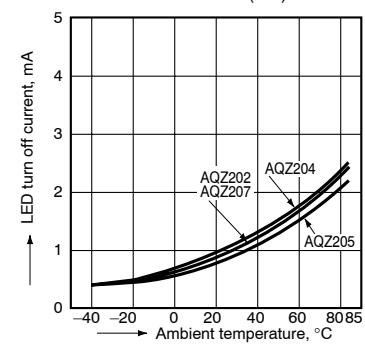


# Power PhotoMOS (AQZ10○, 20○)


7.-{(2)} LED turn off current vs. ambient temperature characteristics (DC type)  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

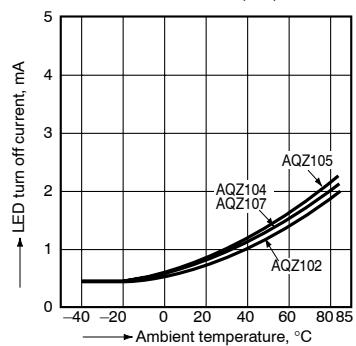


8. LED dropout voltage vs. ambient temperature characteristics  
Sample: all types; LED current: 5 to 50 mA

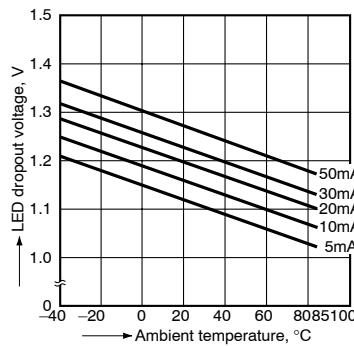


9.-{(1)} Current vs. voltage characteristics of output at MOS portion (AC/DC type)  
Ambient temperature: 25°C 77°F

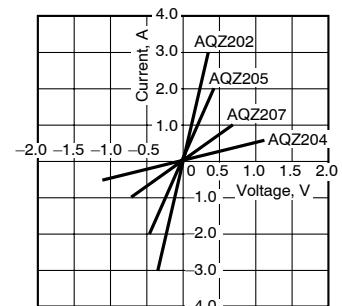


9.-{(2)} Current vs. voltage characteristics of output at MOS portion (DC type)  
Ambient temperature: 25°C 77°F




10. Off state leakage current vs. load voltage characteristics  
Ambient temperature: 25°C 77°F

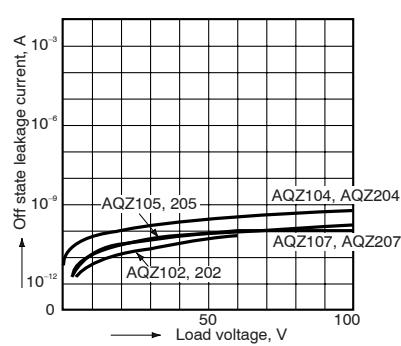


11.-{(1)} Turn on time vs. LED forward current characteristics (AC/DC type)  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

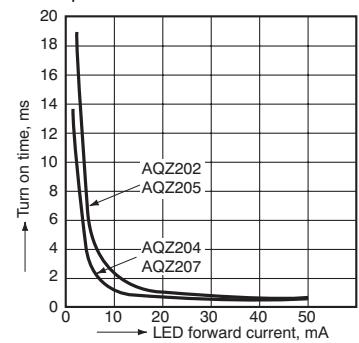


11.-{(2)} Turn on time vs. LED forward current characteristics (DC type)  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F




12.-{(1)} Turn off time vs. LED forward current characteristics (AC/DC type)  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

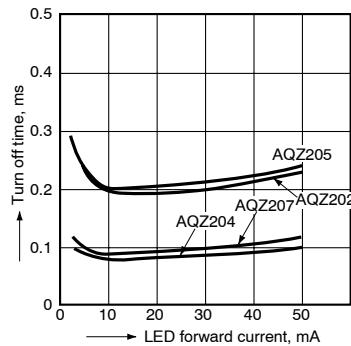


12.-{(2)} Turn off time vs. LED forward current characteristics (DC type)  
Measured portion: between terminals 4 and 6;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC);  
Ambient temperature: 25°C 77°F

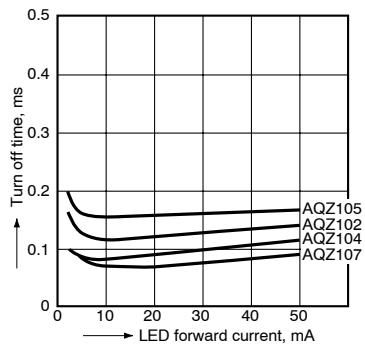


13.-{(1)} Turn on time vs. load voltage characteristics (Load voltage: 60, 100 V type)  
LED current: 10 mA;  
Continuous load current: 100 mA;  
Ambient temperature: 25°C 77°F

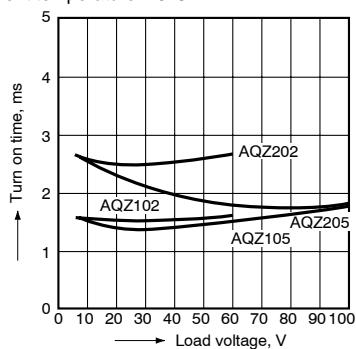

13.-{(2)} Turn on time vs. load voltage characteristics (Load voltage: 200, 400 V type)  
LED current: 10 mA;  
Continuous load current: 100 mA;  
Ambient temperature: 25°C 77°F

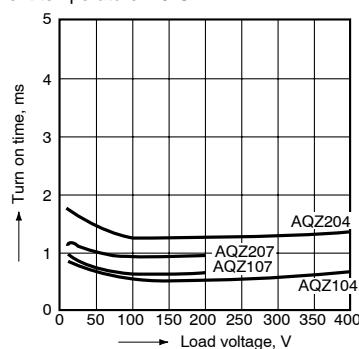


14.-{(1)} Turn on time vs. load current characteristics (Load voltage: 60, 100 V type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Ambient temperature: 25°C 77°F

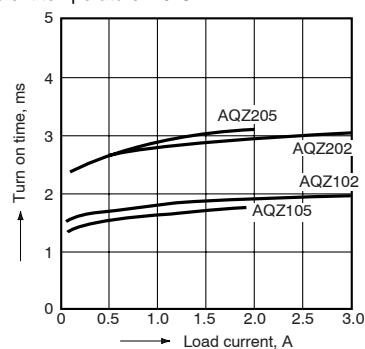


# Power PhotoMOS (AQZ100, 200)


14.-(2) Turn on time vs. load current characteristics (Load voltage: 200, 400 V type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

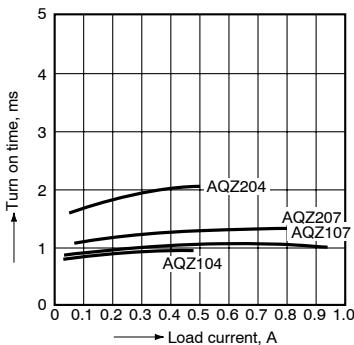


15.- (1) Turn off time vs. load voltage characteristics (Load voltage: 60, 100 V type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

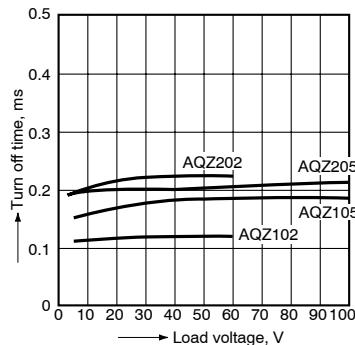


15.- (2) Turn off time vs. load voltage characteristics (Load voltage: 200, 400 V type)  
 LED current: 10 mA;  
 Continuous load current: 100 mA;  
 Ambient temperature: 25°C 77°F

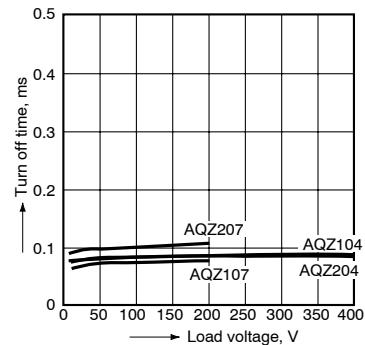


16.- (1) Turn off time vs. load current characteristics (Load voltage: 60, 100 V type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

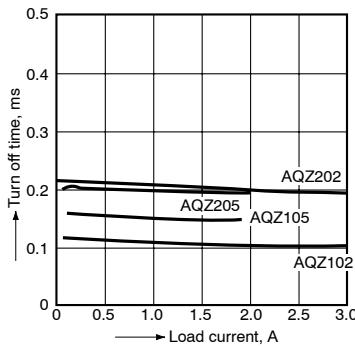


16.- (2) Turn off time vs. load current characteristics (Load voltage: 200, 400 V type)  
 LED current: 10 mA;  
 Load voltage: 10 V (DC);  
 Ambient temperature: 25°C 77°F

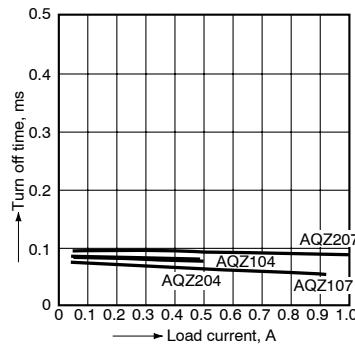


17. Maximum operating frequency vs. load voltage/current characteristics  
 LED current: 10 mA;  
 Ambient temperature: 25°C 77°F

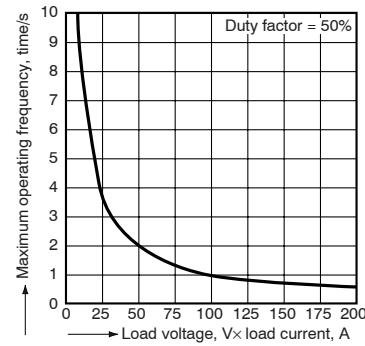

18.- (1) Output capacitance vs. applied voltage characteristics (AC/DC type)  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

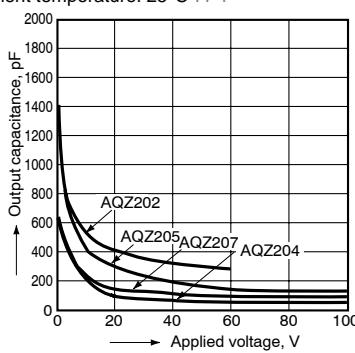


18.- (2) Output capacitance vs. applied voltage characteristics (DC type)  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

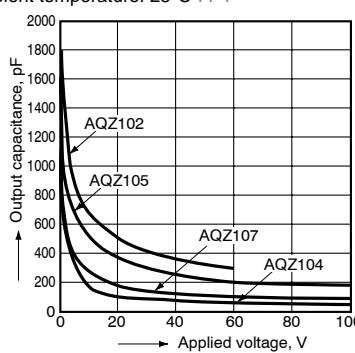

## ACCESSORY


### Socket

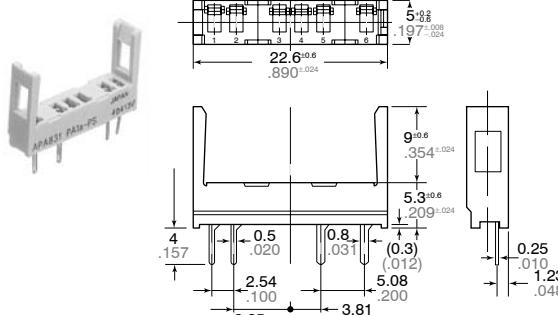


PA1a-PS

PA1a-PS-H

PC board pattern (BOTTOM VIEW)  
 Standard type



Self clinching type



Tolerance:  $\pm 0.1 \pm 0.004$