


TOLERANCES  
UNLESS OTHERWISE SPECIFIED:  $\pm 0.3$

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J05-0079	H.T	05/2/18
B	Added note	J05-0501	H.T	05/18/4

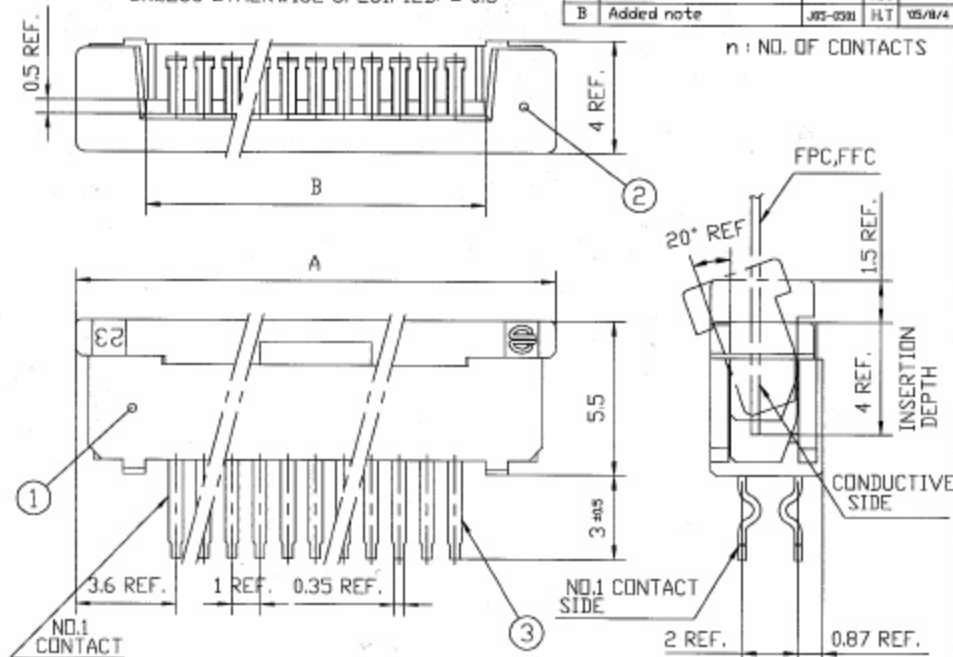

PT.NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	NYLON RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER	NYLON RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : MATTE PURE TIN (LEAD FREE)


RECOMMENDED PC BOARD

THICKNESS : 0.8~1.6

HOLE PATTERN (COMPONENT SIDE)

THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.

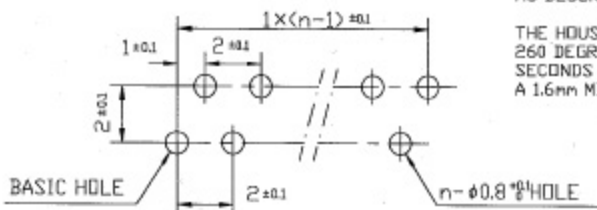

SHEET INDEX	ISSUE	B					TITLE	PRODUCT FAMILY	CODE JP	
	SH. NO.	1								
TOLERANCES UNLESS OTHERWISE SPECIFIED	DR	ENGR	CHK	APP'D	DATE	CUSTOMER COPY	1mm SPACING CONNECTOR (Cat. No. SLW_S-1C7LF)	5BJF	REV B	
LINEAR										
ANGLES										
DO NOT SCALE PRINT	THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI, JAPAN KK.									SCALE
DF-346A REV A								A	JSA 96301	SHEET OF