
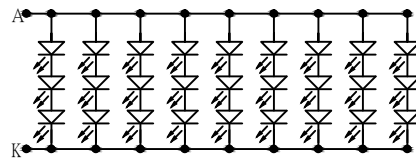


LCM PIN	
1	LED_K
2	LED_A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DOTCLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR (NC)
38	YD (NC)
39	XL (NC)
40	YU (NC)

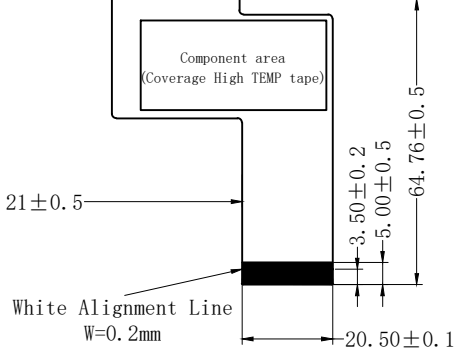

CIRCUIT DIAGRAM

REV	Revision content description	Date
01	FIRST ISSUE	2019.04.08
02	Change backlight,add label.	2020.08.10

		LCD WORLD LIMITED		
TOLERANCE(公差)		Mod.Name		
TOLERANCE UNLESS OTHERWISE SPECIFIED X.X±0.3 X.XX±0.2		LW070JFRN3-01		
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME
mm				ASSEMBLE

Display Type	IPS/NORMAL BLACK/Transmissive
Display Resolution	1024*(RGB)*600
Viewing Driection	Full
LCD Controller/Driver	EK79001+EK73215
Logic Voltage	3.0V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight	White LED Backlight(27PCS-WHITE LED) Vf = 9.6V(Typ), If =180mA(Typ) Brightness = 500cd/m2(Typ)
Remark	