



**New Era  
Electronics**

A division of New Era Group Inc.

The Power . . . The Vision

October 1987

**78HGA  
POSITIVE 5 AMP  
VOLTAGE REGULATOR**


## DESCRIPTION

The 78HGA positive 4 terminal adjustable linear voltage regulator is capable of delivering a continuous load current in excess of 5 amperes over an output range of 5 to 24 volts. The 78HGA has built-in protection features such as output short circuit current limiting, thermal overload and safe operating area protection. If external conditions exceed the 78HGA's capabilities (see absolute maximums), the device temporarily shuts down protecting itself and the load circuit until the fault is removed. This feature eliminates costly additional protection circuitry as well as overly conservative heat sinks typical of discrete high current voltage regulator designs. The 4 lead hermetic TO-204MA package (formerly called TO-3), provides up to 50 watts of internal power dissipation.

## FEATURES


- 5.0 A Output Current
- Internal Current and Thermal Overload Protection
- Internal Short Circuit Protection
- Low Dropout Voltage (typically 2.3V @ 5.0A)
- 50 W Power Dissipation
- Metal 2 Lead TO-204MA Type Package

Connection Diagram  
TO-204 Type Package (Top View)

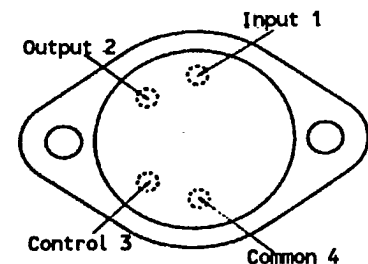

## PRODUCT FAMILY

PART NUMBER	OUTPUT VOLTAGE	DESCRIPTION
78HGASC	5 to 24 V	Commercial Temp
78HGASM	5 to 24 V	Military Temp
78HGASP	5 to 24 V	Military Process

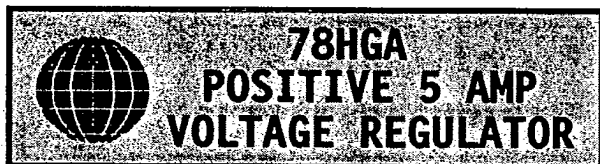

## TYPICAL ELECTRICAL CHARACTERISTICS

T<sub>J</sub>=25° C, V<sub>in</sub>=10V, I<sub>out</sub>=2.0A unless otherwise specified

Line Regulation	0.2% x V <sub>out</sub>	V <sub>in</sub> =V <sub>out</sub> +3V to V <sub>in</sub> =V <sub>out</sub> +16V
Load Regulation	0.2% x V <sub>out</sub>	.01 to 5.0 amps
Short Circuit Current Limit	7.0A <sub>peak</sub>	
Thermal Resistance Junction to Case	1.8° C/W	

## ABSOLUTE MAXIMUM RATINGS

Input Voltage	40V
Input to Output Differential, Output Short Circuited	35V
Internal Power Dissipation	50W @ 25° C case
Operating Junction Temperature:	

78HGASC (commercial)	0° C to 150° C
78HGASM (mil temp)	-55° C to 150° C
78HGASP (mil process)	-55° C to 150° C

Storage Temperature Range	-55° C to 150° C
Pin Temp (soldering 60 sec)	300° C

**New Era  
Electronics**

A Division of New Era Group Inc.  
The Power . . . The Vision