


P/O 6000-0XXX BOARD ASSEMBLY

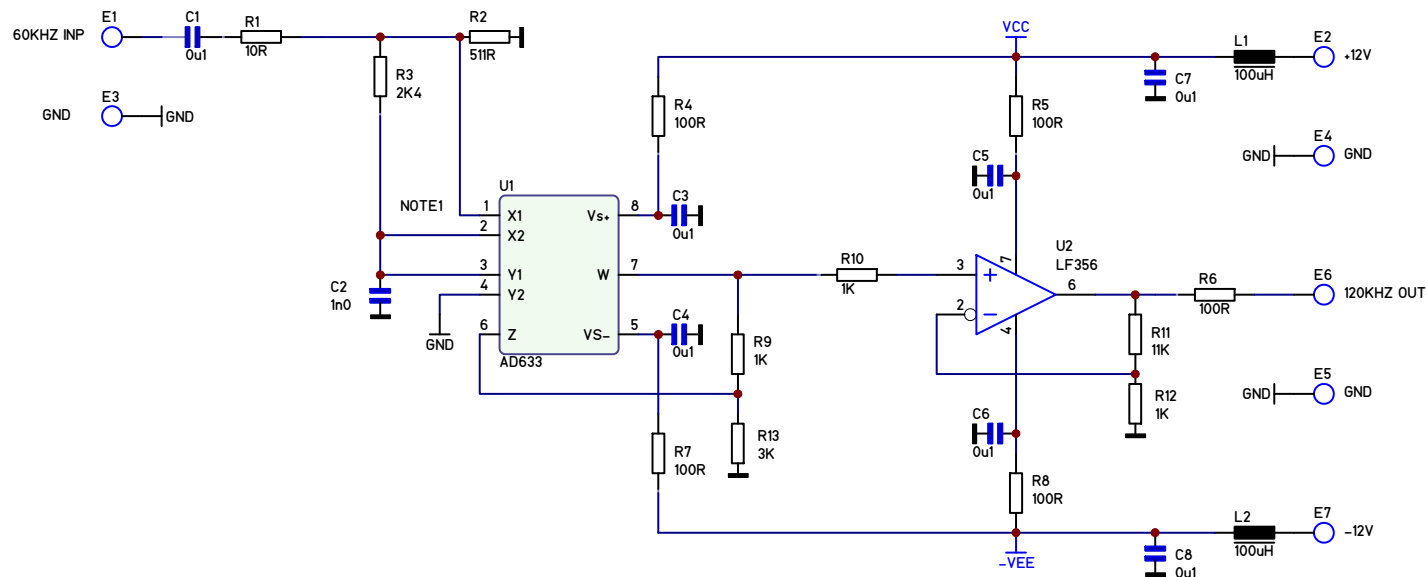

Unless otherwise specified, all values are as follows:
resistor values are in Ohms, i.e. 0R47, 5R6, 220, 5K6, 22K
capacitor values are in Microfarads, i.e. 220p, 0u1, 2u2, 33
inductor values are in Microhenries, i.e. 0u22, 5u6, 68, 2m2

This drawing is our property. Duplication,
unauthorized use of any kind is
prohibited.
Without Approval use only for inquiry.

Approval:

	Date	Name	Change Index	Change Notification Nr.	Date	Name
Drawn	8-Dec-2015	GJO				
Modified						
Checked						
☒ Prototype	☐ Production	☐ BOM Done?				

PCB Name: *Frequency Doubler board*

PCB Nr: *6000-0XXX*

PCB Type: *FR4-2L-2LL-2SM-16mm*

Title *816X WWVB UPGRADE*

Used in *8161/8164*

Repl.for *N/A*

Build No. *1*

Scale: *SCH*

Drw. Type: *Text*

Size: *A*

Rev: *0*

Prj. Nr

13034G

Drw. Nr

4415-00XX

File: *AD633.sch*

Sheet *1* of *1*