


2-Port Shunt-Through Measurement

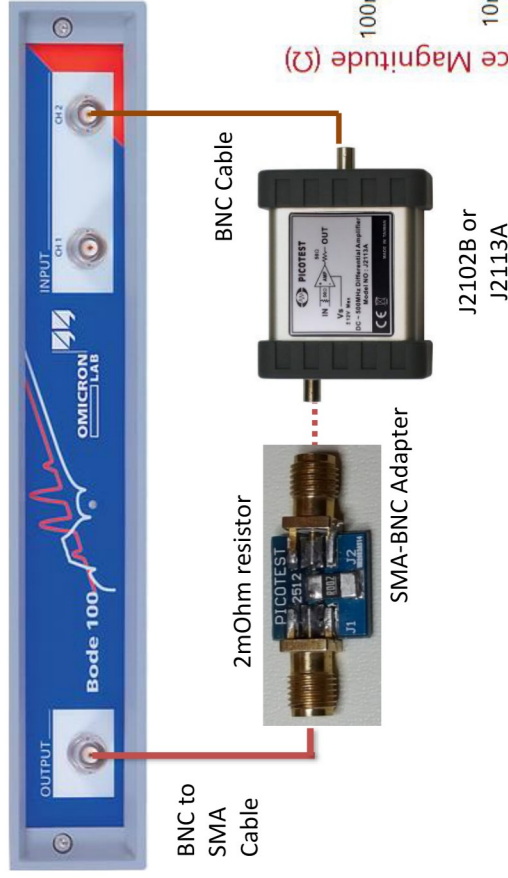


▼ Shunt-Thru

Measure impedance with the Shunt-Thru method.
Recommended impedance range: 1 mΩ ... 100 Ω

⚠ Channel 2 is terminated with 50 Ω.
Do not apply more than 5 Vrms.

No supported device

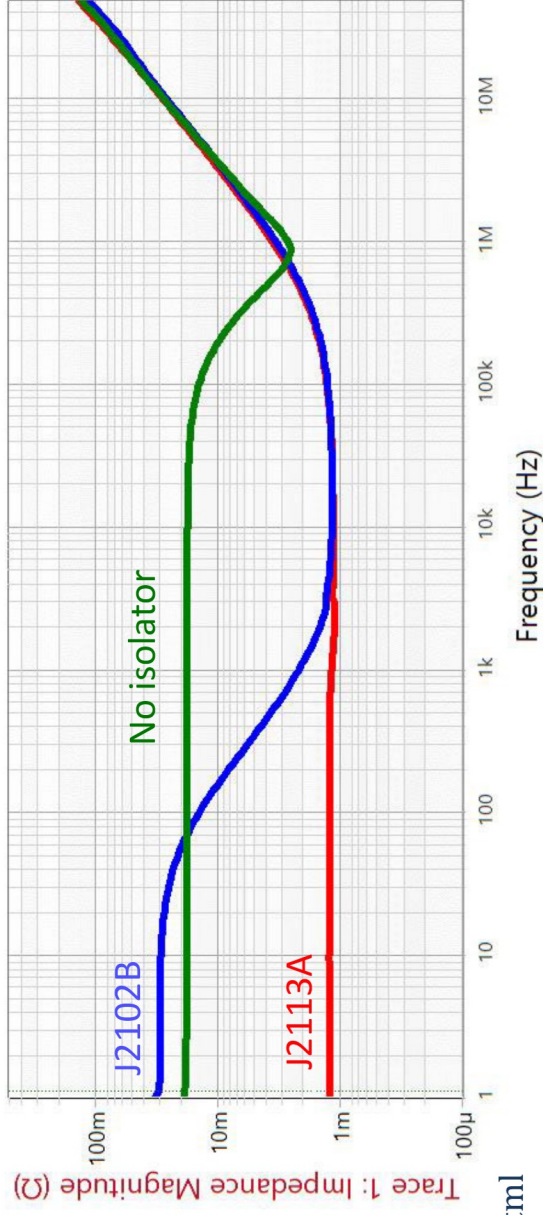

<https://www.picotest.com/measurements/2-port.html>