


■ CELL CHARACTERISTICS

Capacity	Typical	4200 mAh 15.5 Wh
	Minimum	4000 mAh 14.7 Wh
Cell Voltage	Nominal	3.6 V
	Charge	4.2 V
	Discharge	2.5 V
Charge Current	Standard	4.2 A
Charge Time	Standard	1.5 hr
Discharge Current	Maximum	45 A
Internal Resistance	AC (1 KHz)	15 mΩ (Max)
Temperature	Charge	-20°C to 60°C
	Discharge	-40°C to 60°C
Energy Density	Volumetric	615 Wh/l
	Gravimetric	230 Wh/kg

■ PHYSICAL CHARACTERISTICS

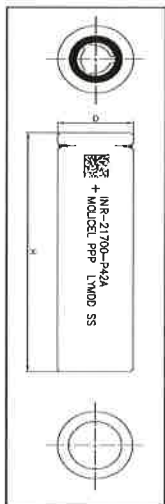


Shape	Cylindrical
Can	Steel
Diameter	21.55mm (Max)
Height	70.15mm (Max)
Weight	70 g (Max)


The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice.

For application specific information, please contact E-One Moli Energy Sales and Applications or the nearest MOLICEL[®] recognized agent.


■ Charge Characteristics

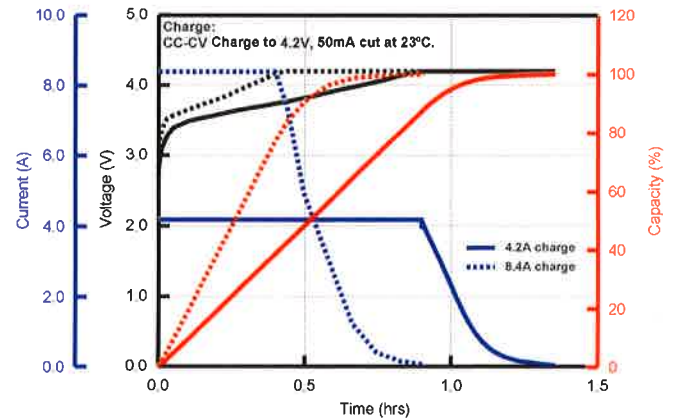

■ Discharge Rate Characteristics

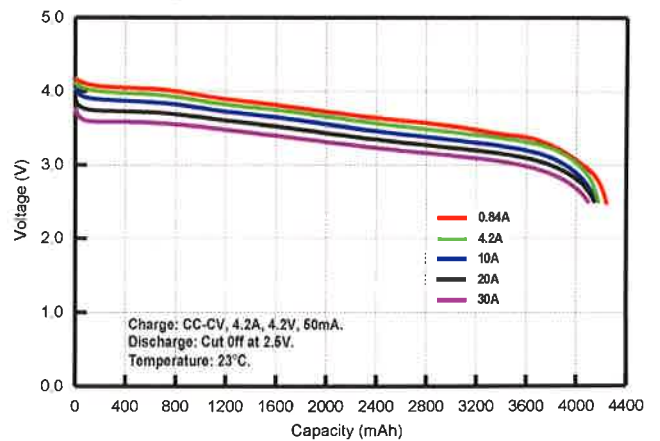

■ Discharge Temperature Characteristics

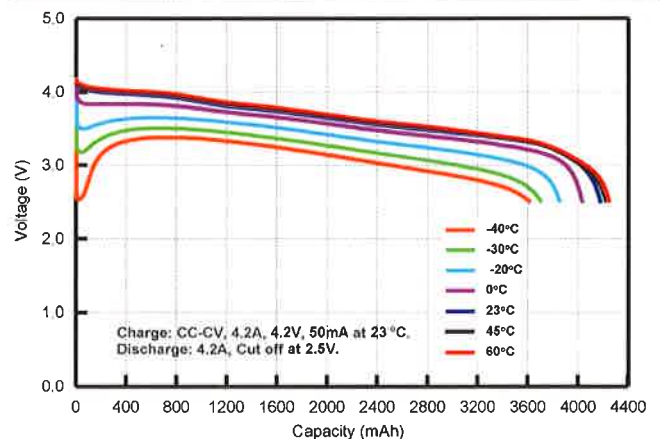

■ Cycle Characteristics

