



LCD MODULE

Article No.: **AC-164AYA-70-H**

16 x 4 Characters
STN yellowgreenTechnology
reflective and wide temperature



Gleichmann & Co. Electronics GmbH
Industriestr. 16
76297 Stutensee
Germany
Tel.: +49 (07249) 910-151
Fax: +49 (07249) 910-559
Email: rbo@msc-ge.com
Internet: www.msc-ge.com



晶采光電科技股份有限公司
AMPIRE CO., LTD.

SPECIFICATIONS FOR LCD MODULE

CUSTOMER	
CUSTOMER PART NO.	
AMPIRE PART NO.	AC-164AYA-70H
APPROVED BY	
DATE	

AMPIRE CO., LTD.

**TOWER A, 4F, No.114, Sec. 1, HSIN-TAI 5th RD., HIS-CHIH,
TAIPEI HSIEN, TAIWAN(R.O.C.)**

台北縣汐止鎮新台五路一段114號4樓(東方科學園區A棟)

TEL:886-2-26967269, FAX:886-2-26967196 or 886-2-26967270

APPROVED BY	CHECKED BY	ORGANIZED BY

RECORD OF REVISION

Revision Date	Page	Contents	Editor
2003/12/25		New Release	Patrick

1 FEATURES

- (1) Display format : 16 characters $\times$ 4 lines
- (2) Construction : STN LCD, Black Bezel, Zebra and PCB.
- (3) Display type : STN , Yellow-green mode , Reflective , 6 o'clock view.
- (4) Controller : ST7066U or equivalent.
- (5) 5V single power input.
- (6) Extended temperature type.
- (7) Excellent LC : VOP maintains at 5V for whole temp. range, no need extra temp. compensation circuit.

2 MECHANICAL DATA

Parameter	Stand Value	Unit
Dot size	0.55(W) $\times$ 0.55(H)	mm
Dot pitch	0.60(W) $\times$ 0.60(H)	mm
Character size	2.95(W) $\times$ 4.75(H)	mm
Viewing area	61.4(W) $\times$ 25.0(H)	mm
Module size	87.0(W) $\times$ 60.0(H) $\times$ 11.0 max (T)	mm

3 ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Min	Max	Unit
Logic Circuit Supply Voltage		VDD-VSS	-0.3	7.0	V
LCD Driving Voltage		VDD-VO	-0.3	10.0	V
Input Voltage		VI	-0.3	VDD+0.3	V
Extended temp. type	Operating Temp.	TOP	-20	70	°C
	Storage Temp.	TSTG	-30	80	°C


4 ELECTRO-OPTICAL CHARACTERISTICS

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
----- Electronic Characteristics -----							
Logic Circuit Supply Voltage	VDD-VSS	--	4.5	5.0	5.5	V	
LCD Driving Voltage	VDD-VO	-20 °C	4.75	5.0	5.25	V	0 ~ 50 °C for Normal Temp. type -20 ~ 70 °C for Extended Temp. type
		0 °C	4.75	5.0	5.25		
		25 °C	4.75	5.0	5.25		
		50 °C	4.75	5.0	5.25		
		70 °C	4.75	5.0	5.25		
Input Voltage	VIH	--	0.7 VDD	--	VDD	V	
	VIL	--	VSS	--	0.3 VDD	V	
Logic Supply Current	IDD	VDD = 5V	--	1.2	1.7	mA	
----- Optical Characteristics -----							
Contrast	CR	25°C	--	5	--		Note 1
Rise Time	tr	25°C	--	100	200	ms	Note 2
Fall Time	tf	25°C	--	150	200	ms	
Viewing Angle Range	θ f-θ b	25°C & CR≥2	20	--	100	Deg.	Note 3
	θ l-θ r		--	20	--		
Frame Frequency	fF	25°C	--	64	--	Hz	


(NOTE 1) Contrast ratio :

CR = (Brightness in OFF state) / (Brightness in ON state)


(NOTE 2) Response time :

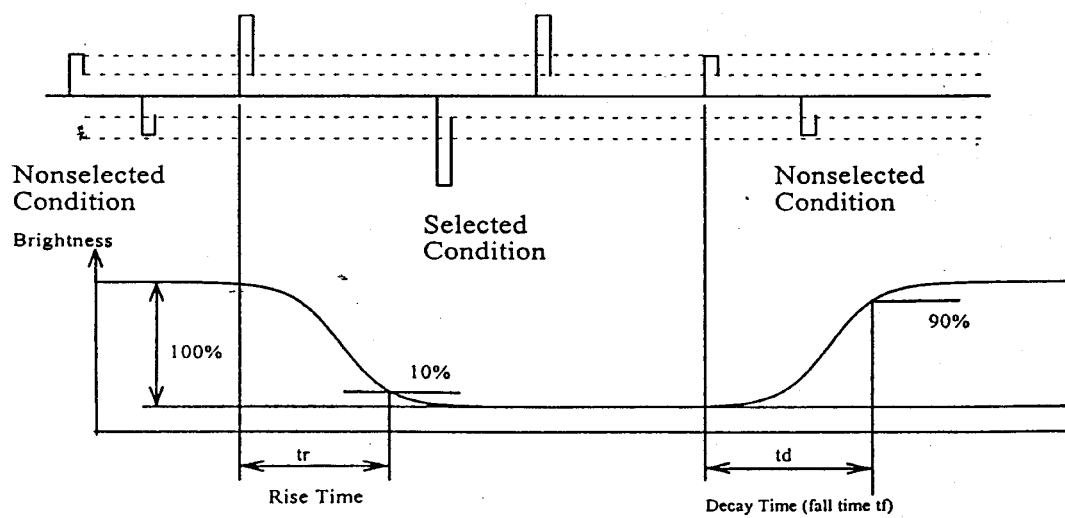

(NOTE 3) Viewing angle

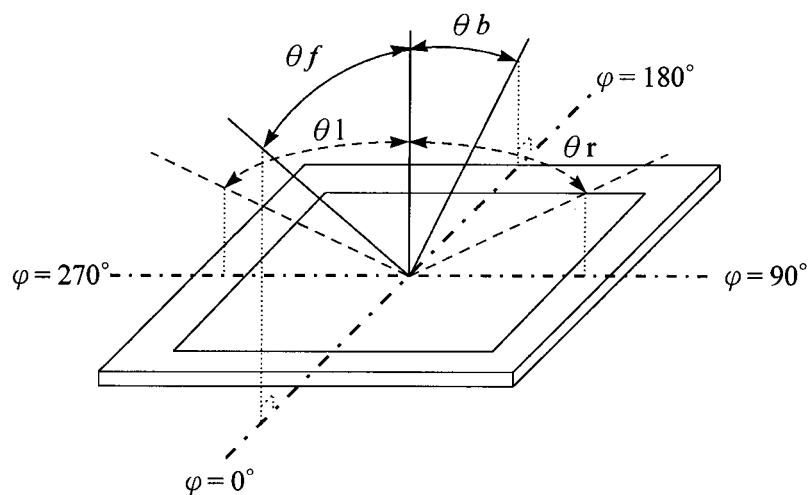


5 BLOCK DIAGRAM & INTERFACE

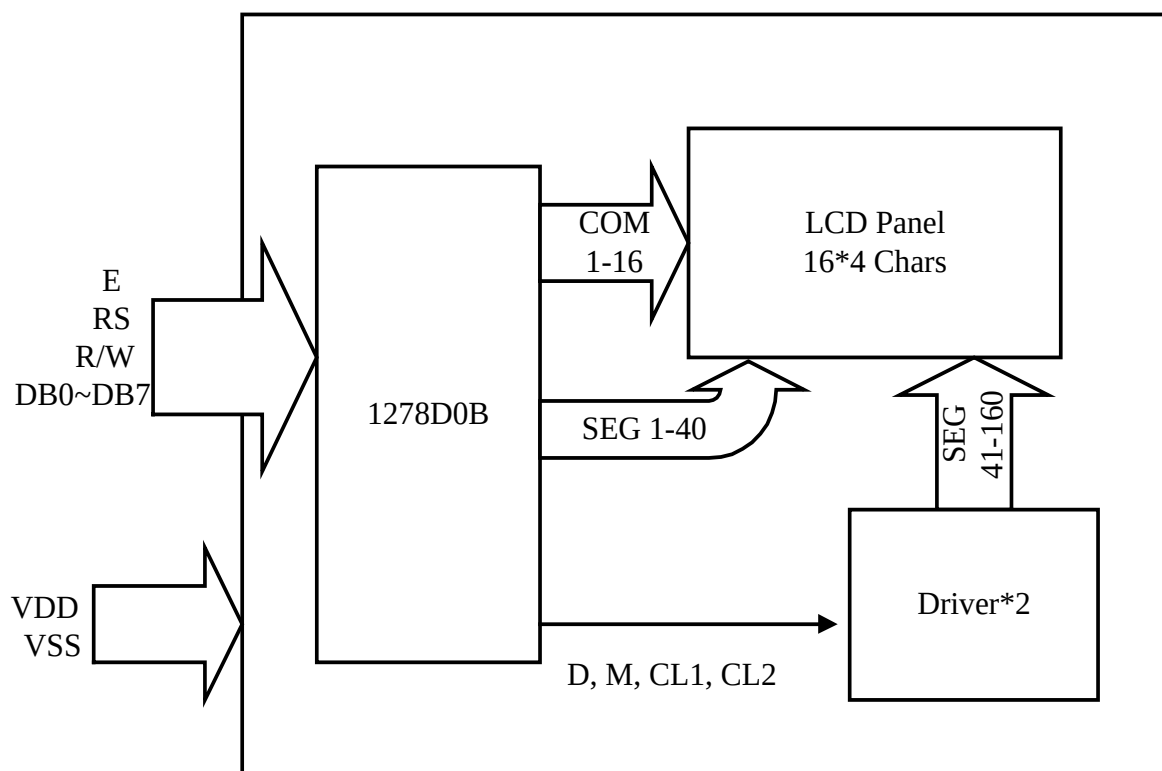

No.	Symbol	Function
1	VSS	Ground (0V)
2	VDD	Supply Voltage for Logic (+5V or +3.3V)
3	VO	Contrast Adjustment
4	RS	Data/Instruction Select
5	R/W	Read/Write Select
6	E	Enable Signal
7	DB0	Data Bus
8	DB1	Data Bus
9	DB2	Data Bus
10	DB3	Data Bus
11	DB4	Data Bus
12	DB5	Data Bus
13	DB6	Data Bus
14	DB7	Data Bus
15	NC	No connection
16	NC	No connection

6 POWER SUPPLY

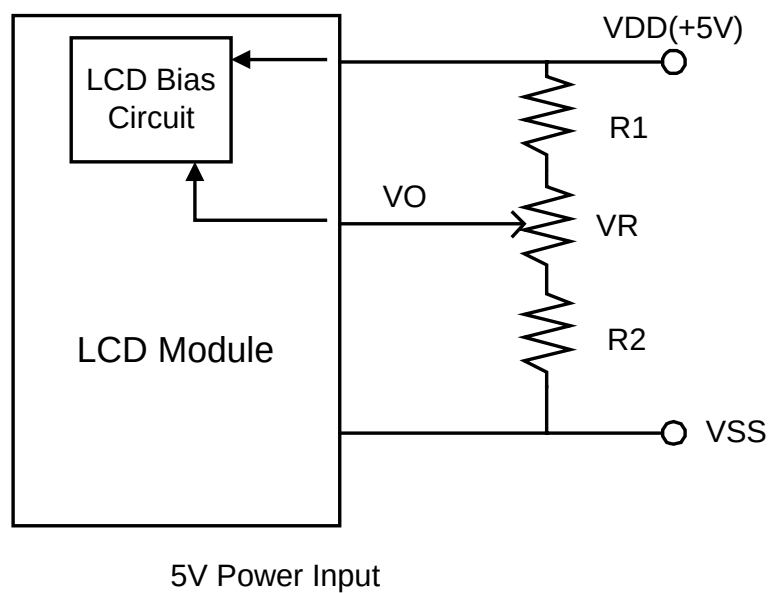


7 DD RAM ADDRESS

CHAR.	1	2	3	...	14	15	16
LINE 1	00	01	02	...	0D	0E	0F
LINE 2	40	41	42	...	4D	4E	4F
LINE 3	10	11	12	...	1D	1E	1F
LINE 4	50	51	52	...	5D	5E	5F


8 TIMING CHARACTERISTICS

Write Operation

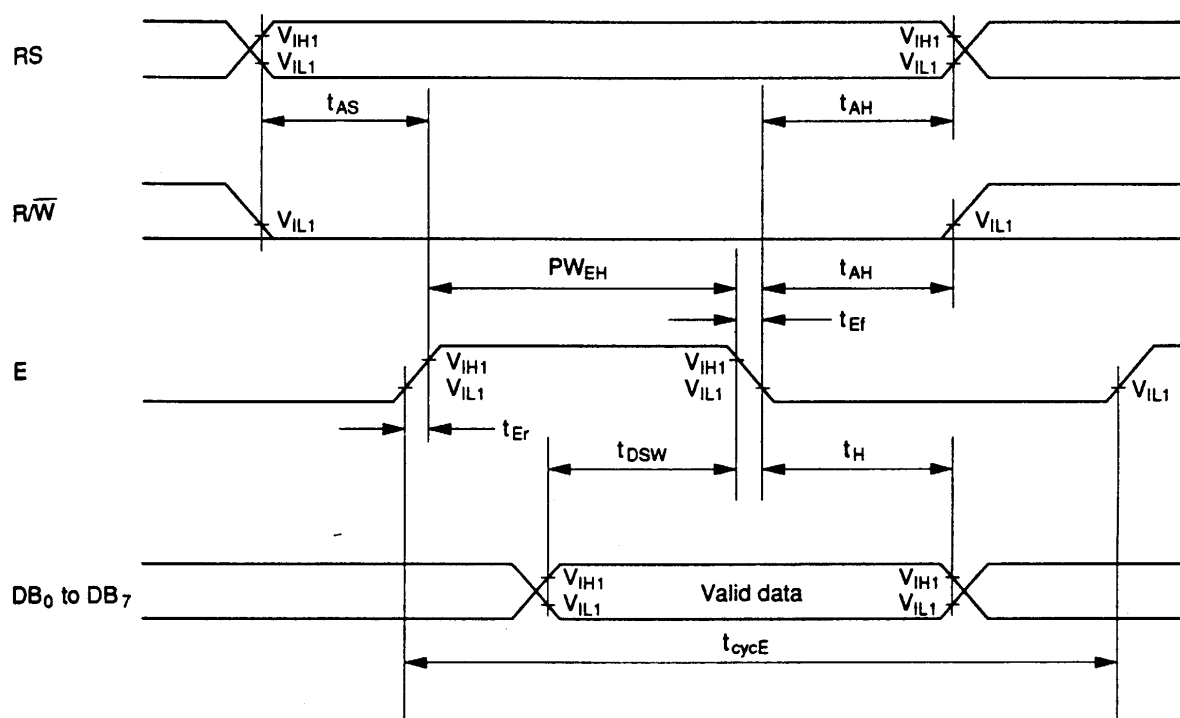

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	t_{cycE}	1200	-	-	ns
Enable pulse width (high level)	PW_{EH}	140	-	-	
Enable rise/fall time	t_{Er}, t_{Ef}	-	-	25	
Address set-up time (RS, R/W to E)	t_{AS}	0	-	-	
Address hold time	t_{AH}	10	-	-	
Data set-up time	t_{DSW}	40	-	-	
Data hold time	t_H	10	-	-	

Read Operation

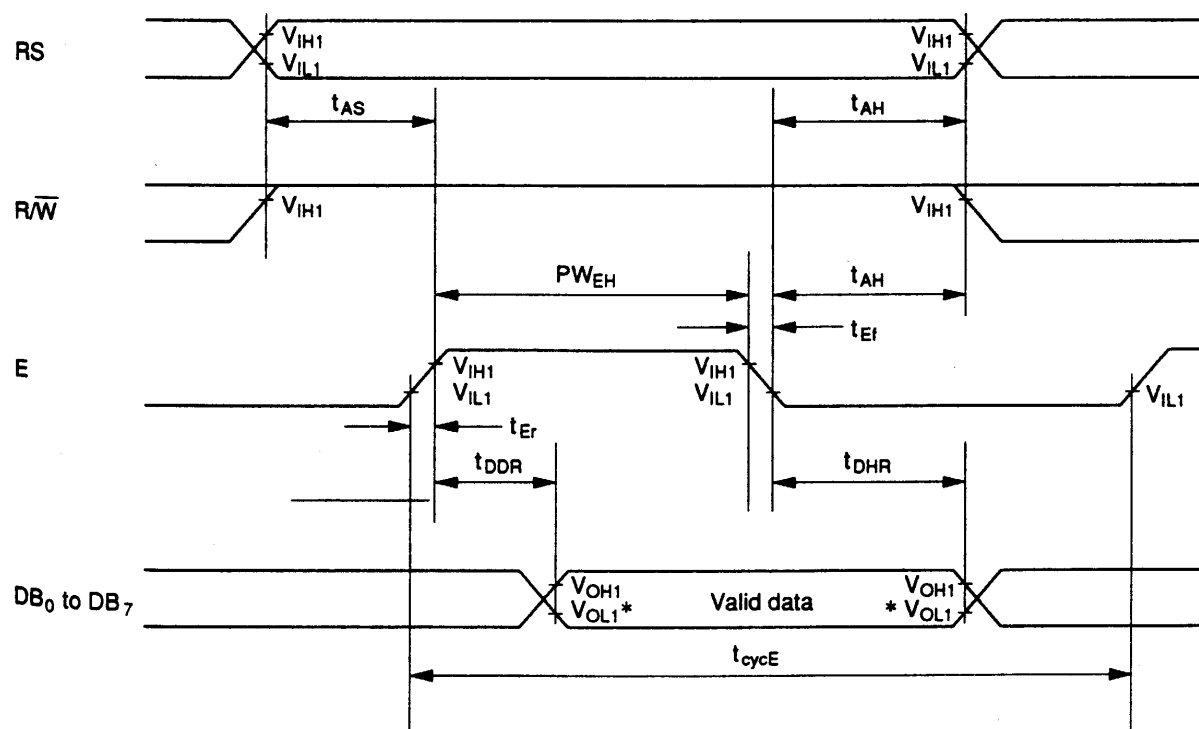

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	t_{cycE}	1200	-	-	ns
Enable pulse width (high level)	PW_{EH}	140	-	-	
Enable rise/fall time	t_{Er}, t_{Ef}	-	-	25	
Address set-up time (RS, R/W to E)	t_{AS}	0	-	-	
Address hold time	t_{AH}	10	-	-	
Data delay time	t_{DDR}	--	-	100	
Data hold time	t_{DHR}	10	-	-	

9 FONT TABLE

b7-b4 b3-b0		0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000	CG RAM (1)			0	@	P	`	P				-	3	E	@	p	
0001	(2)		!	1	A	Q	a	q				.	7	%	4	ä	q
0010	(3)		"	2	B	R	b	r				"	/	9	x	p	θ
0011	(4)		#	3	C	S	c	s				┘	9	7	e	e	∞
0100	(5)		\$	4	D	T	d	t				√	I	k	h	μ	o
0101	(6)		%	5	E	U	e	u				*	7	+	1	o	U
0110	(7)		&	6	F	V	f	v				7	0	=	3	p	Σ
0111	(8)		'	7	G	W	g	w				7	+	7	7	g	π
1000	(1)		(	8	H	X	h	x				4	7	*	9	j	Σ
1001	(2)		)	9	I	Y	i	y				o	7	7	h	'	y
1010	(3)		*	:	J	Z	j	z				±	3	0	h	j	7
1011	(4)		+	:	K	L	k	l				*	9	h	0	*	7
1100	(5)		,	<	L	7	l	l				*	9	7	7	o	h
1101	(6)		-	=	M	J	m	j				u	7	^	7	h	÷
1110	(7)		.	>	N	^	n	÷				3	h	o	^	h	
1111	(8)		/	?	O	_	o	+				u	9	7	"	o	■

10 QUALITY AND RELIABILITY

10.1 TEST CONDITIONS

Tests should be conducted under the following conditions :

Ambient temperature : $25 \pm 5^{\circ}\text{C}$

Humidity : $60 \pm 25\% \text{ RH}$.

10.2 SAMPLING PLAN

Sampling method shall be in accordance with MIL-STD-105E, inspection level II, normal inspection, and single sampling plan tables for normal, tightened, and reduced inspection.

10.3 ACCEPTABLE QUALITY LEVEL


A major defect is defined as one that could cause failure to or materially reduce the usability of the unit for its intended purpose. A minor defect is one that does not materially reduce the usability of the unit for its intended purpose or is an infringement from established standards and has no significant bearing on its effective use or operation.

10.4 APPEARANCE

An appearance test should be conducted by human sight at approximately 30 cm distance from the LCD module under fluorescent light. The inspection area of LCD panel shall be within the range of following limits.

10.5 INSPECTION QUALITY CRITERIA

Item	Description of defects			Class of Defects	Acceptable level (%)	
Function	Short circuit or Pattern cut			Major	0.65	
Dimension	Deviation from drawings			Major	1.5	
Black spots	Ave . dia . D	area A	area B	Minor	2.5	
	D≤0.2	Disregard				
	0.2<D≤0.3	3	4			
	0.3<D≤0.4	2	3			
	0.4<D	0	1			
Black lines	Width W, Length L		A	B	Minor	2.5
	W≤0.03		disregard			
	0.03<W≤0.05		3	4		
	0.05<W≤0.07 , L≤3.0		1	1		
	See line criteria					
Bubbles in polarizer	Average diameter D 0.2 < D < 0.5 mm for N = 4 , D > 0.5 for N = 1			Minor	2.5	
Color uniformity	Rainbow color or newton ring.			Minor	2.5	
Glass Scratches	Obvious visible damage.			Minor	2.5	
Contrast ratio	See note 1			Minor	2.5	
Response time	See note 2			Minor	2.5	
Viewing angle	See note 3			Minor	2.5	

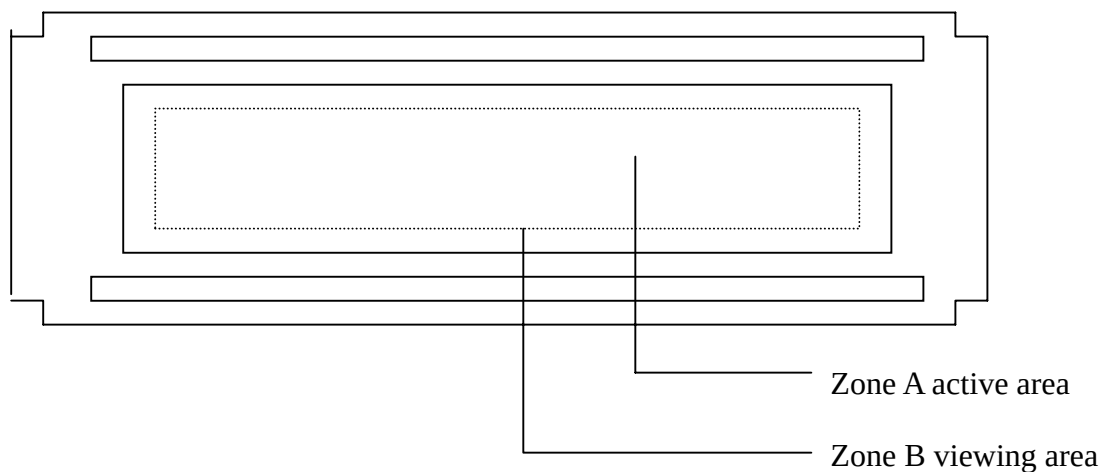

10.6 RELIABILITY

Test Item	Test Conditions	Note
	Extended Temp. type	
High Temperature Operation	70±3°C , t=96 hrs	
Low Temperature Operation	-20±3°C , t=96 hrs	
High Temperature Storage	80±3°C , t=96 hrs	1,2
Low Temperature Storage	-30±3°C , t=96 hrs	1,2
Thermal Shock Test	-30°C ~ 25°C ~ 80°C 30 min. 5 min. 30 min. (1 cycle) Total 5 cycle	1,2
Humidity Test	40 °C, Humidity 90%, 96 hrs	1,2
Vibration Test (Packing)	Sweep frequency : 10 ~ 55 ~ 10 Hz/1min Amplitude : 0.75mm Test direction : X.Y.Z/3 axis Duration : 30min/each axis	2

Note 1 : Condensation of water is not permitted on the module.

Note 2 : The module should be inspected after 1 hour storage in normal conditions
(15-35°C , 45-65%RH).

Definitions of life end point :

- Current drain should be smaller than the specific value.
- Function of the module should be maintained.
- Appearance and display quality should not have degraded noticeably.
- Contrast ratio should be greater than 50% of the initial value.

11 HANDLING PRECAUTIONS

- (1) An LCD module is a fragile item and should not be subjected to strong mechanical shocks.
- (2) Avoid applying pressure to the module surface. This will distort the glass and cause a change in colour.
- (3) Under no circumstances should the position of the bezel tabs or their shape be modified.
- (4) Do not modify the display PCB in either shape or positioning of components.
- (5) Do not modify or move location of the zebra or heat seal connectors.
- (6) The device should only be soldered to during interfacing. Modification to other areas of the board should not be carried out.
- (7) In the event of LCD breakage and resultant leakage of fluid do not inhale, ingest or make contact with the skin. If contact is made rinse immediately.
- (8) When cleaning the module use a soft damp cloth with a mild solvent, such as Isopropyl or Ethyl alcohol. The use of water, ketone or aromatic is not permitted.
- (9) Prior to initial power up input signals should not be applied.
- (10) Protect the module against static electricity and observe appropriate anti-static precautions.

12 OUTLINE DIMENSION

REV	REVISION RECORD	DATE	NAME
1	NEW RELEASE	5-18-98	Amey
2	Change Pin Name: 15, 16	02-11-98	EMILY
3	Add 164AXX-00/03/04/07/08/09/11/13/70/71/95	12-04-00	SNOW
4	Add 164AXX-73	01-09-00	SNOW

Dimensions: 87.0±0.5, 82.0±0.3, 7.5, 16-φ1.0, 16, 2.5, 20.8 (A, A), 25.0±0.2 (V, A), 17.1, 15.0, 39.4±0.3, 7.8, 2.75, 12.65, 10.05, 56.2 (A, A), 61.4±0.2 (V, A), 81.5±0.3, 4-φ2.5, 60.0±0.5, 55.0±0.3, 17.0, 19.0, 2.5, 5.9±0.3, 1.6, 11.0Max.

A BLOCK

1	VSS	9	DB2
2	VDD	10	DB3
3	V0	11	DB4
4	RS	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	NC
8	DB1	16	NC

4	-95
3	-00/-04/-08/-11/-70
2	-71/-73
1	-03/-07/-09/-13 (黑色低程)
[4]	
[3]	

適用品號

DWG. NO.	*980514MD	SHEET	1 OF 1
[4]			

REV	REVISION RECORD	DATE	NAME
1	NEW RELEASE	5-18-98	Amey
2	Change Pin Name: 15, 16	02-11-98	EMILY
3	Add 164AXX-00/03/04/07/08/09/11/13/70/71/95	12-04-00	SNOW
4	Add 164AXX-73	01-09-00	SNOW

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					

TOLERANCE	GRADE	"	B	"	
1	TOLERANCE	GRADE	"	B	"
2					
3					
4					
5					
6					
7					
8					