



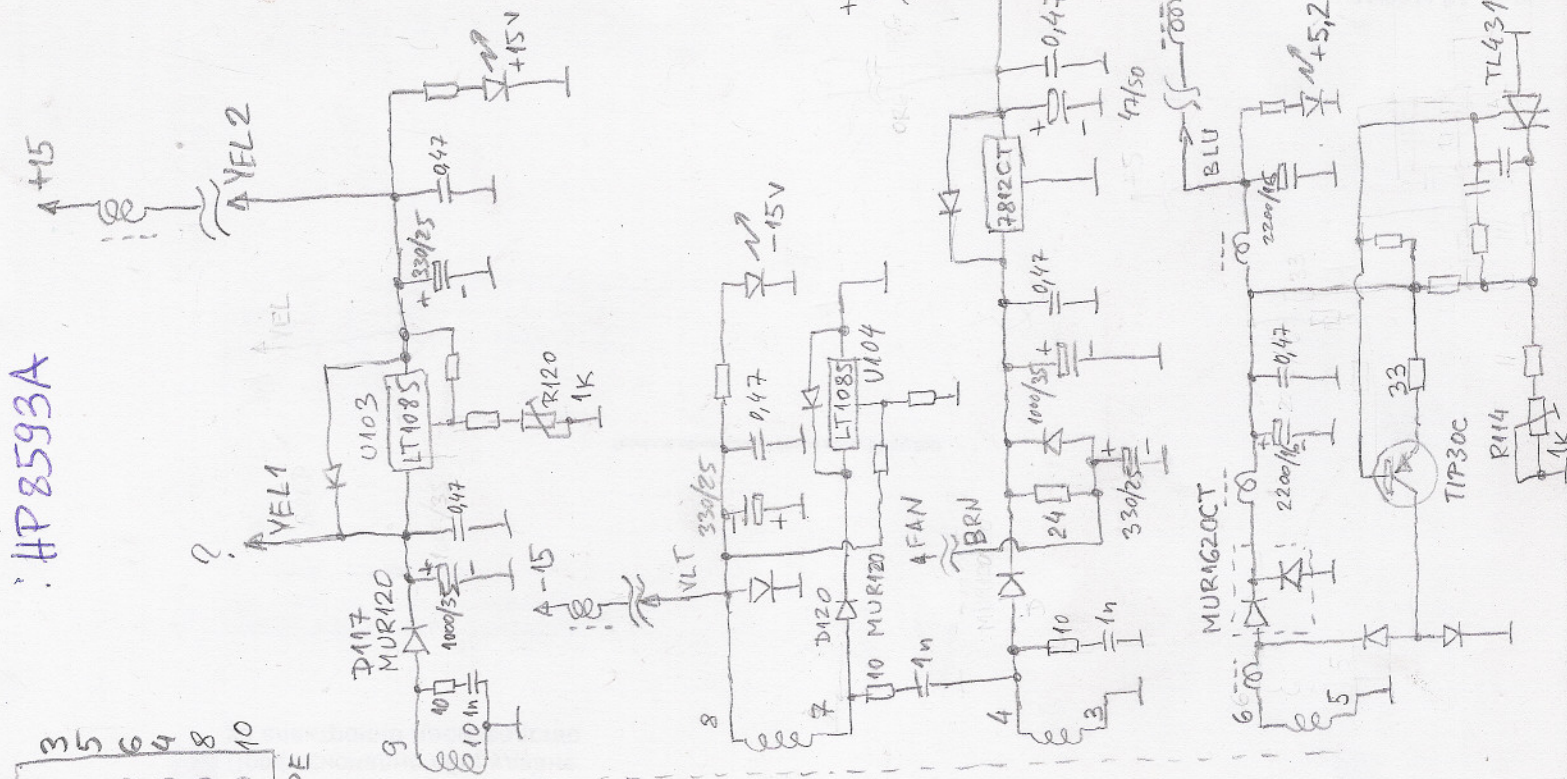


overload protection


HP8593A

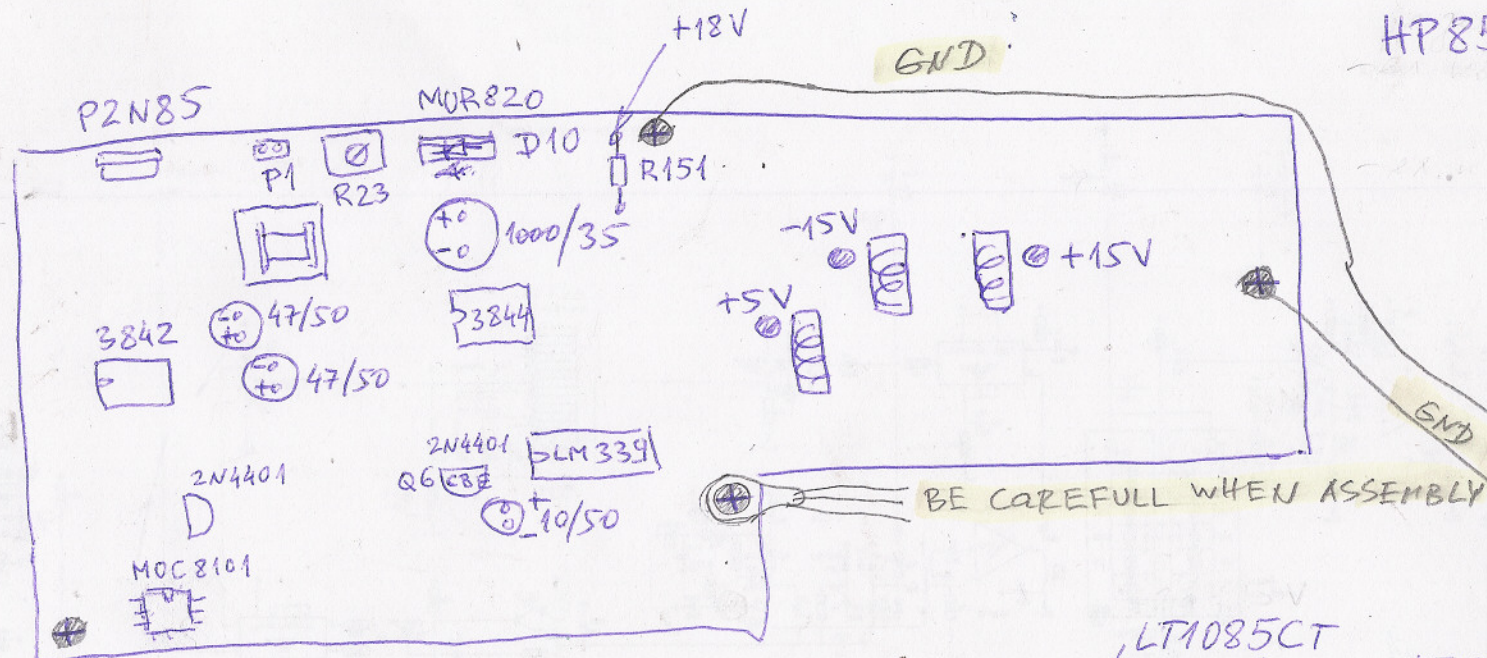


- +5V
- +15V
- -15V
- +12V

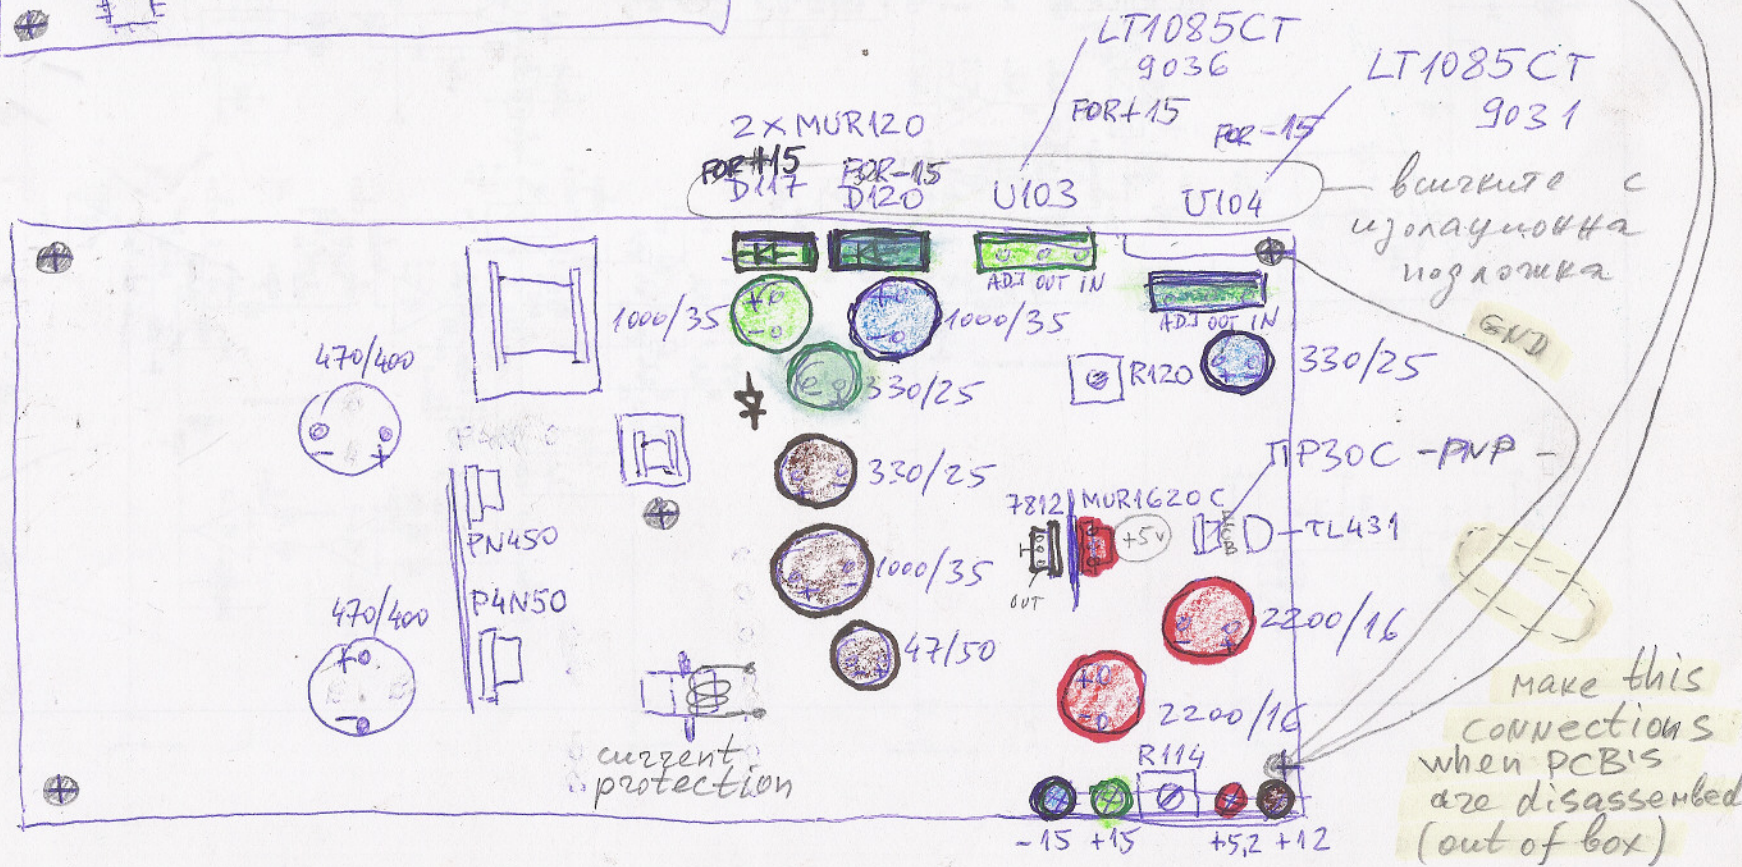

Stby Power supply
always ON! +330V

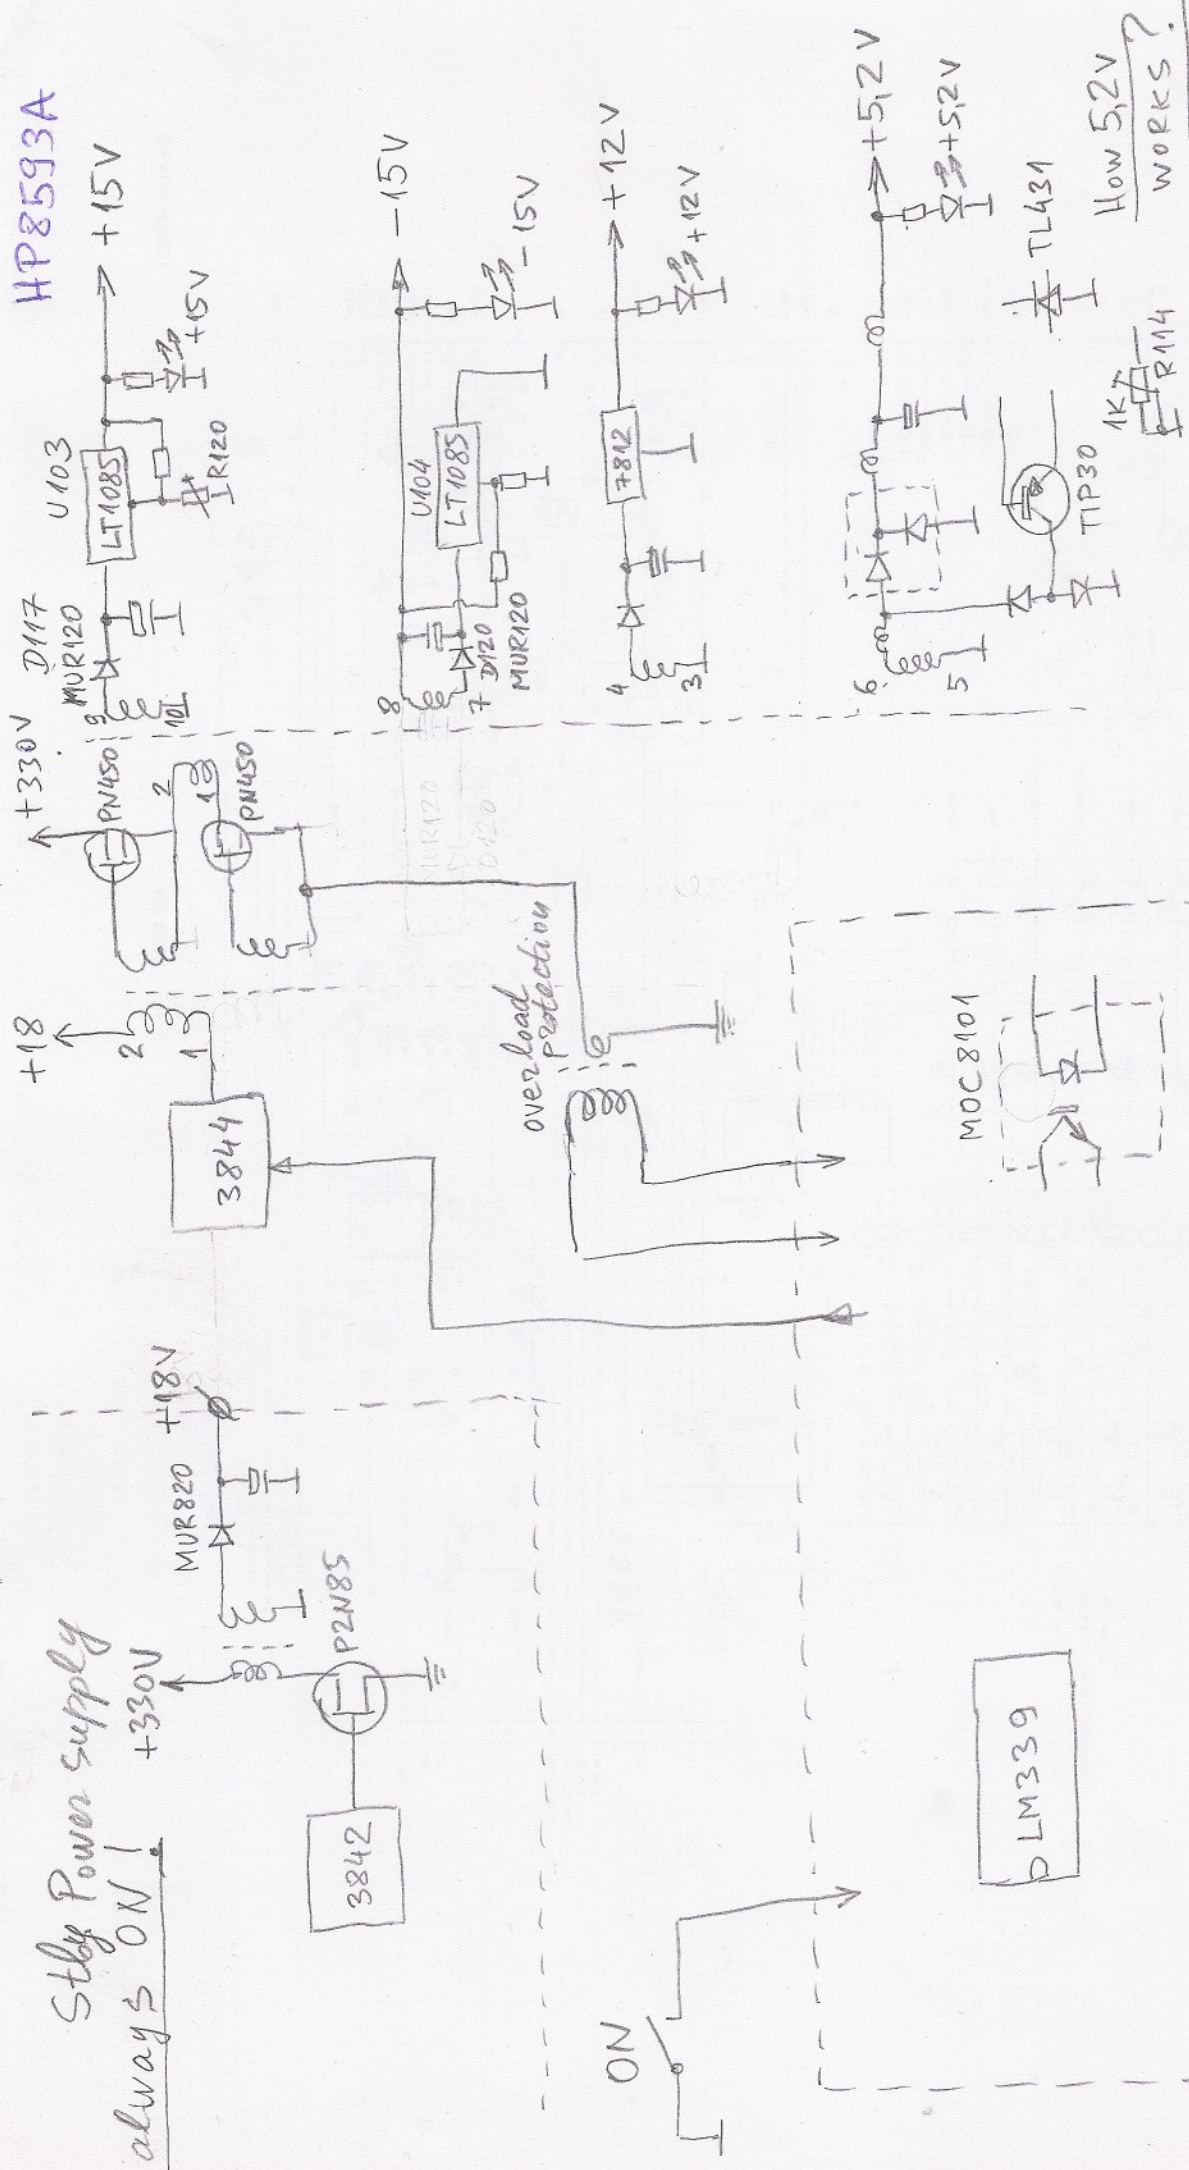

CONNECTOR DB37 is UP

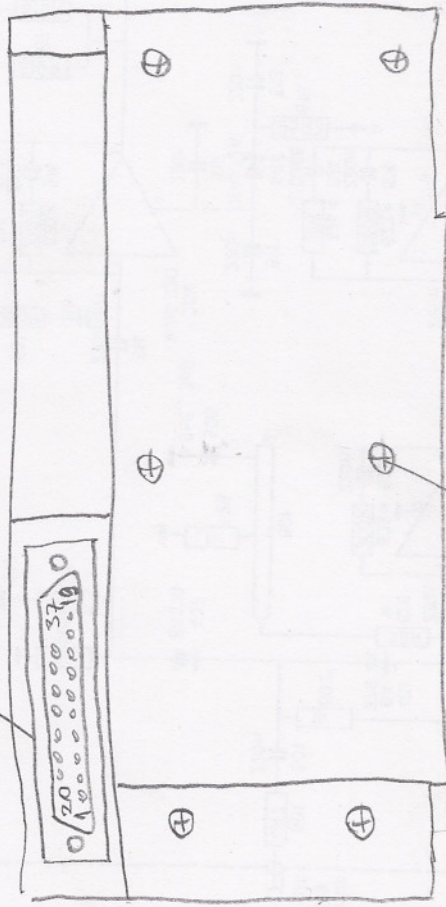


this screw - shorter

- ① Don't know for what are:
 - LINE_TRIG (J13-pin 18)
 - HPWRUP (J13-pin 37)


- ② To have 5,2 V correctly, you need to load +15V or -15V or +12V or all of them with current min. 50% of nominal.
 - +5V (4,5A), +15V (0,2A), -15V (0,2A)


Example: A) +5,2 is 4,0 when load is: +5V (1A), others - above
 B) +5,2 is 4,5 when load is: +5V (4,5A), but +15V or -15V is 1,
 C) +5,2 is 5,2 (OK) when load is: +5V (4,5A), but +15V or -15V is 1,

HP8533A

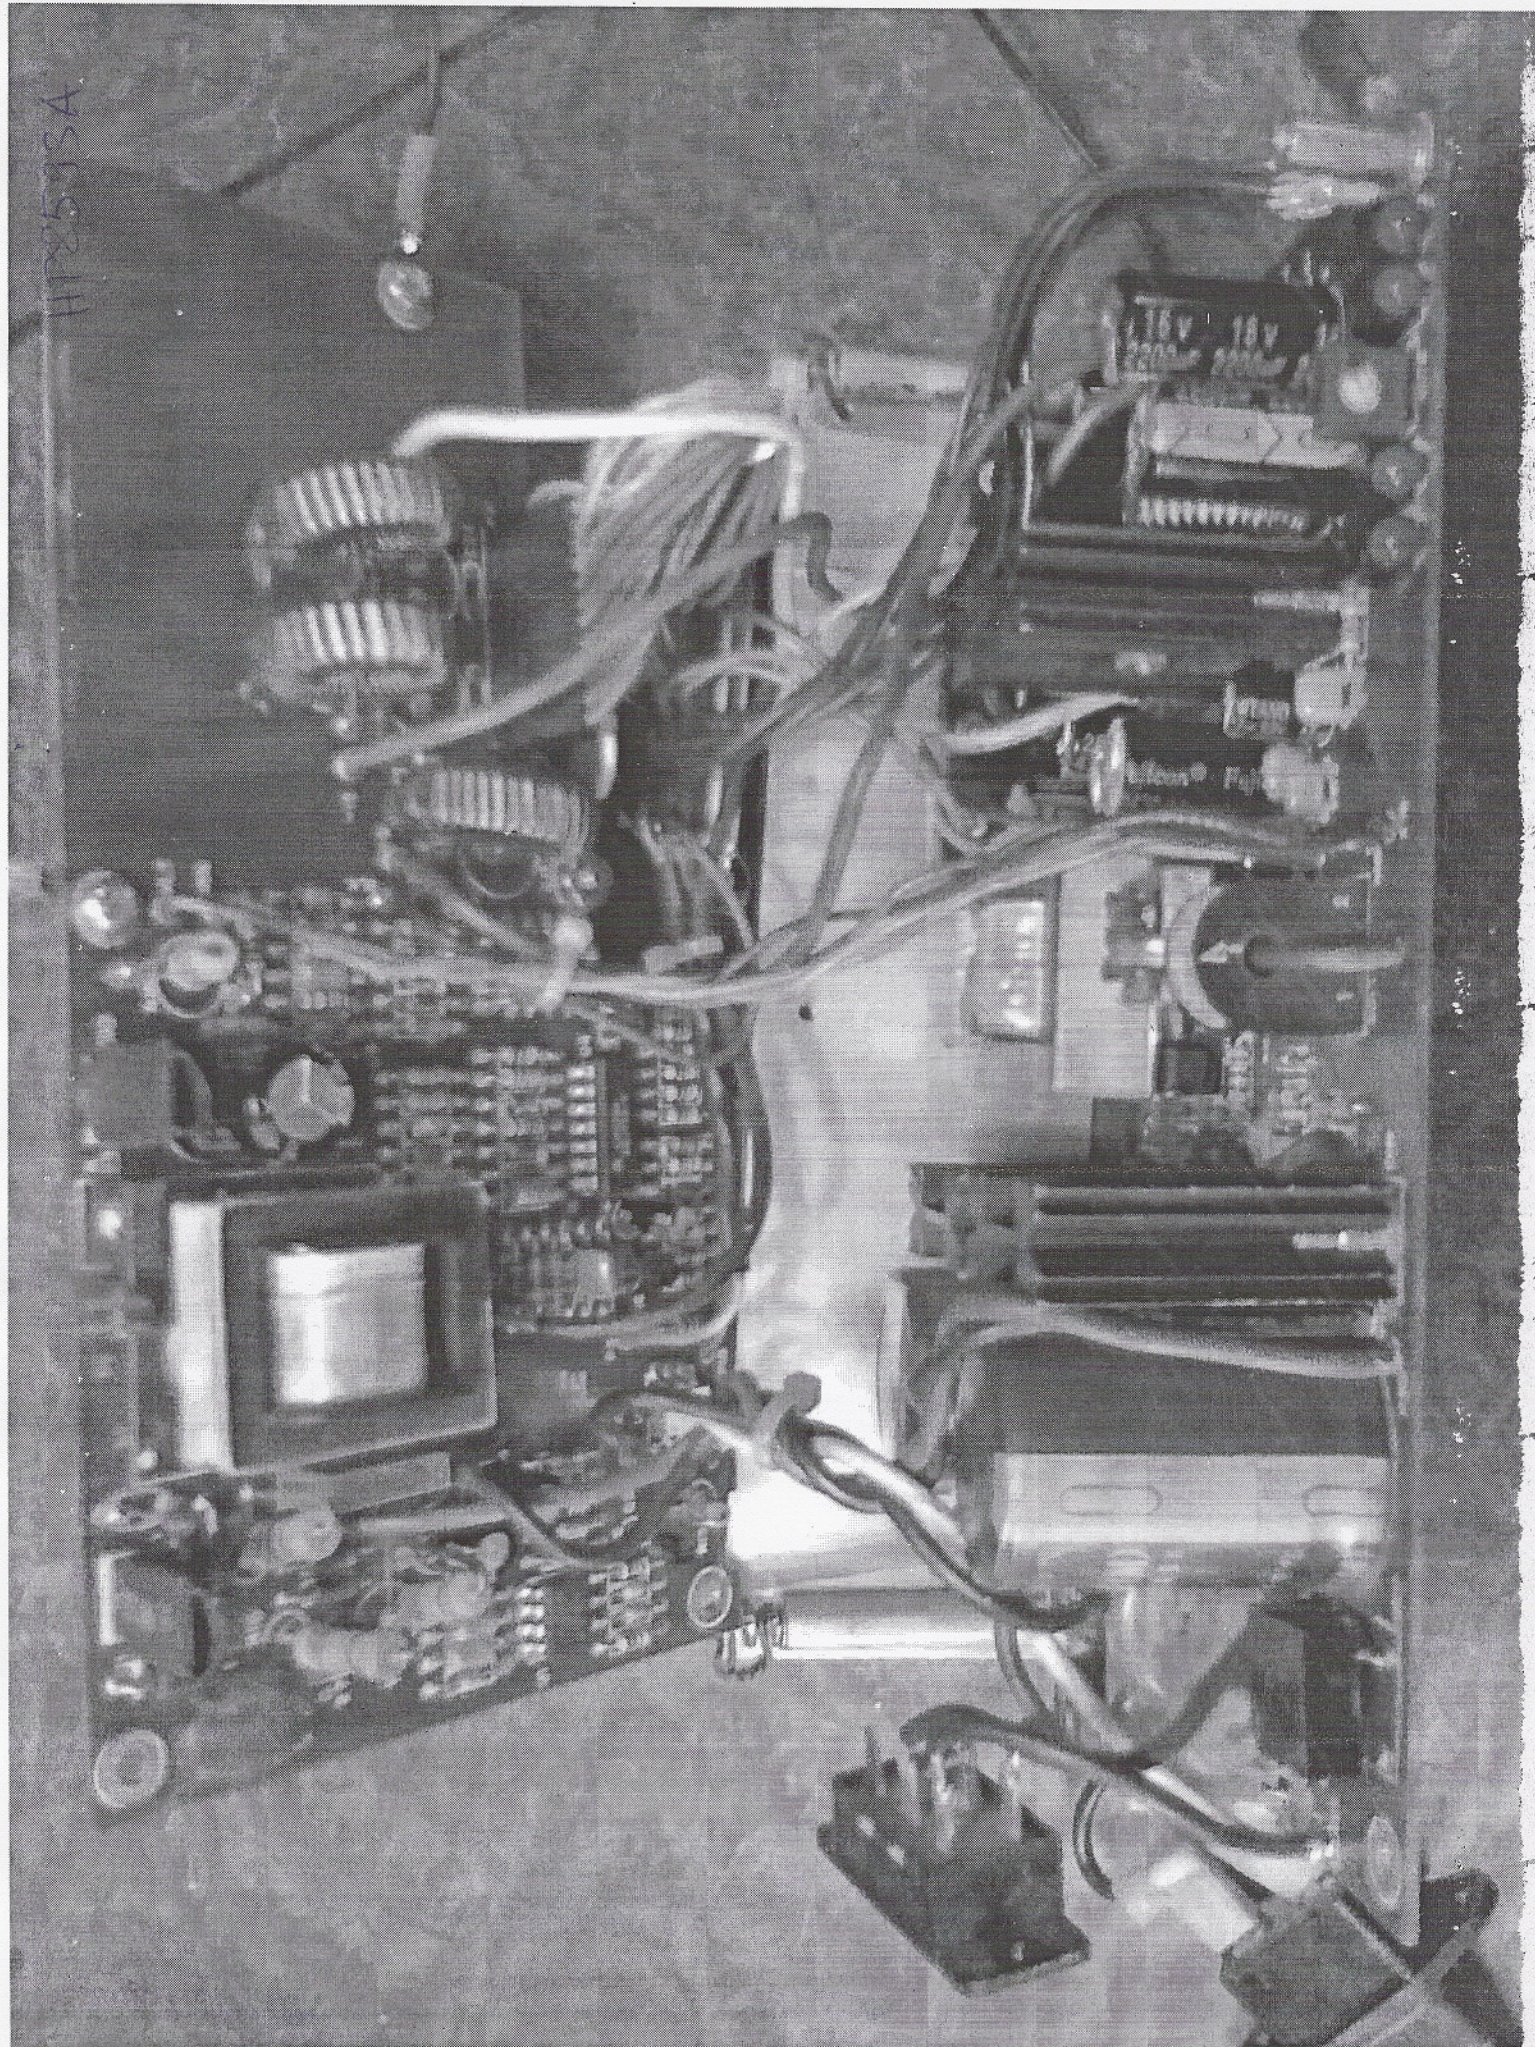

HP8593A

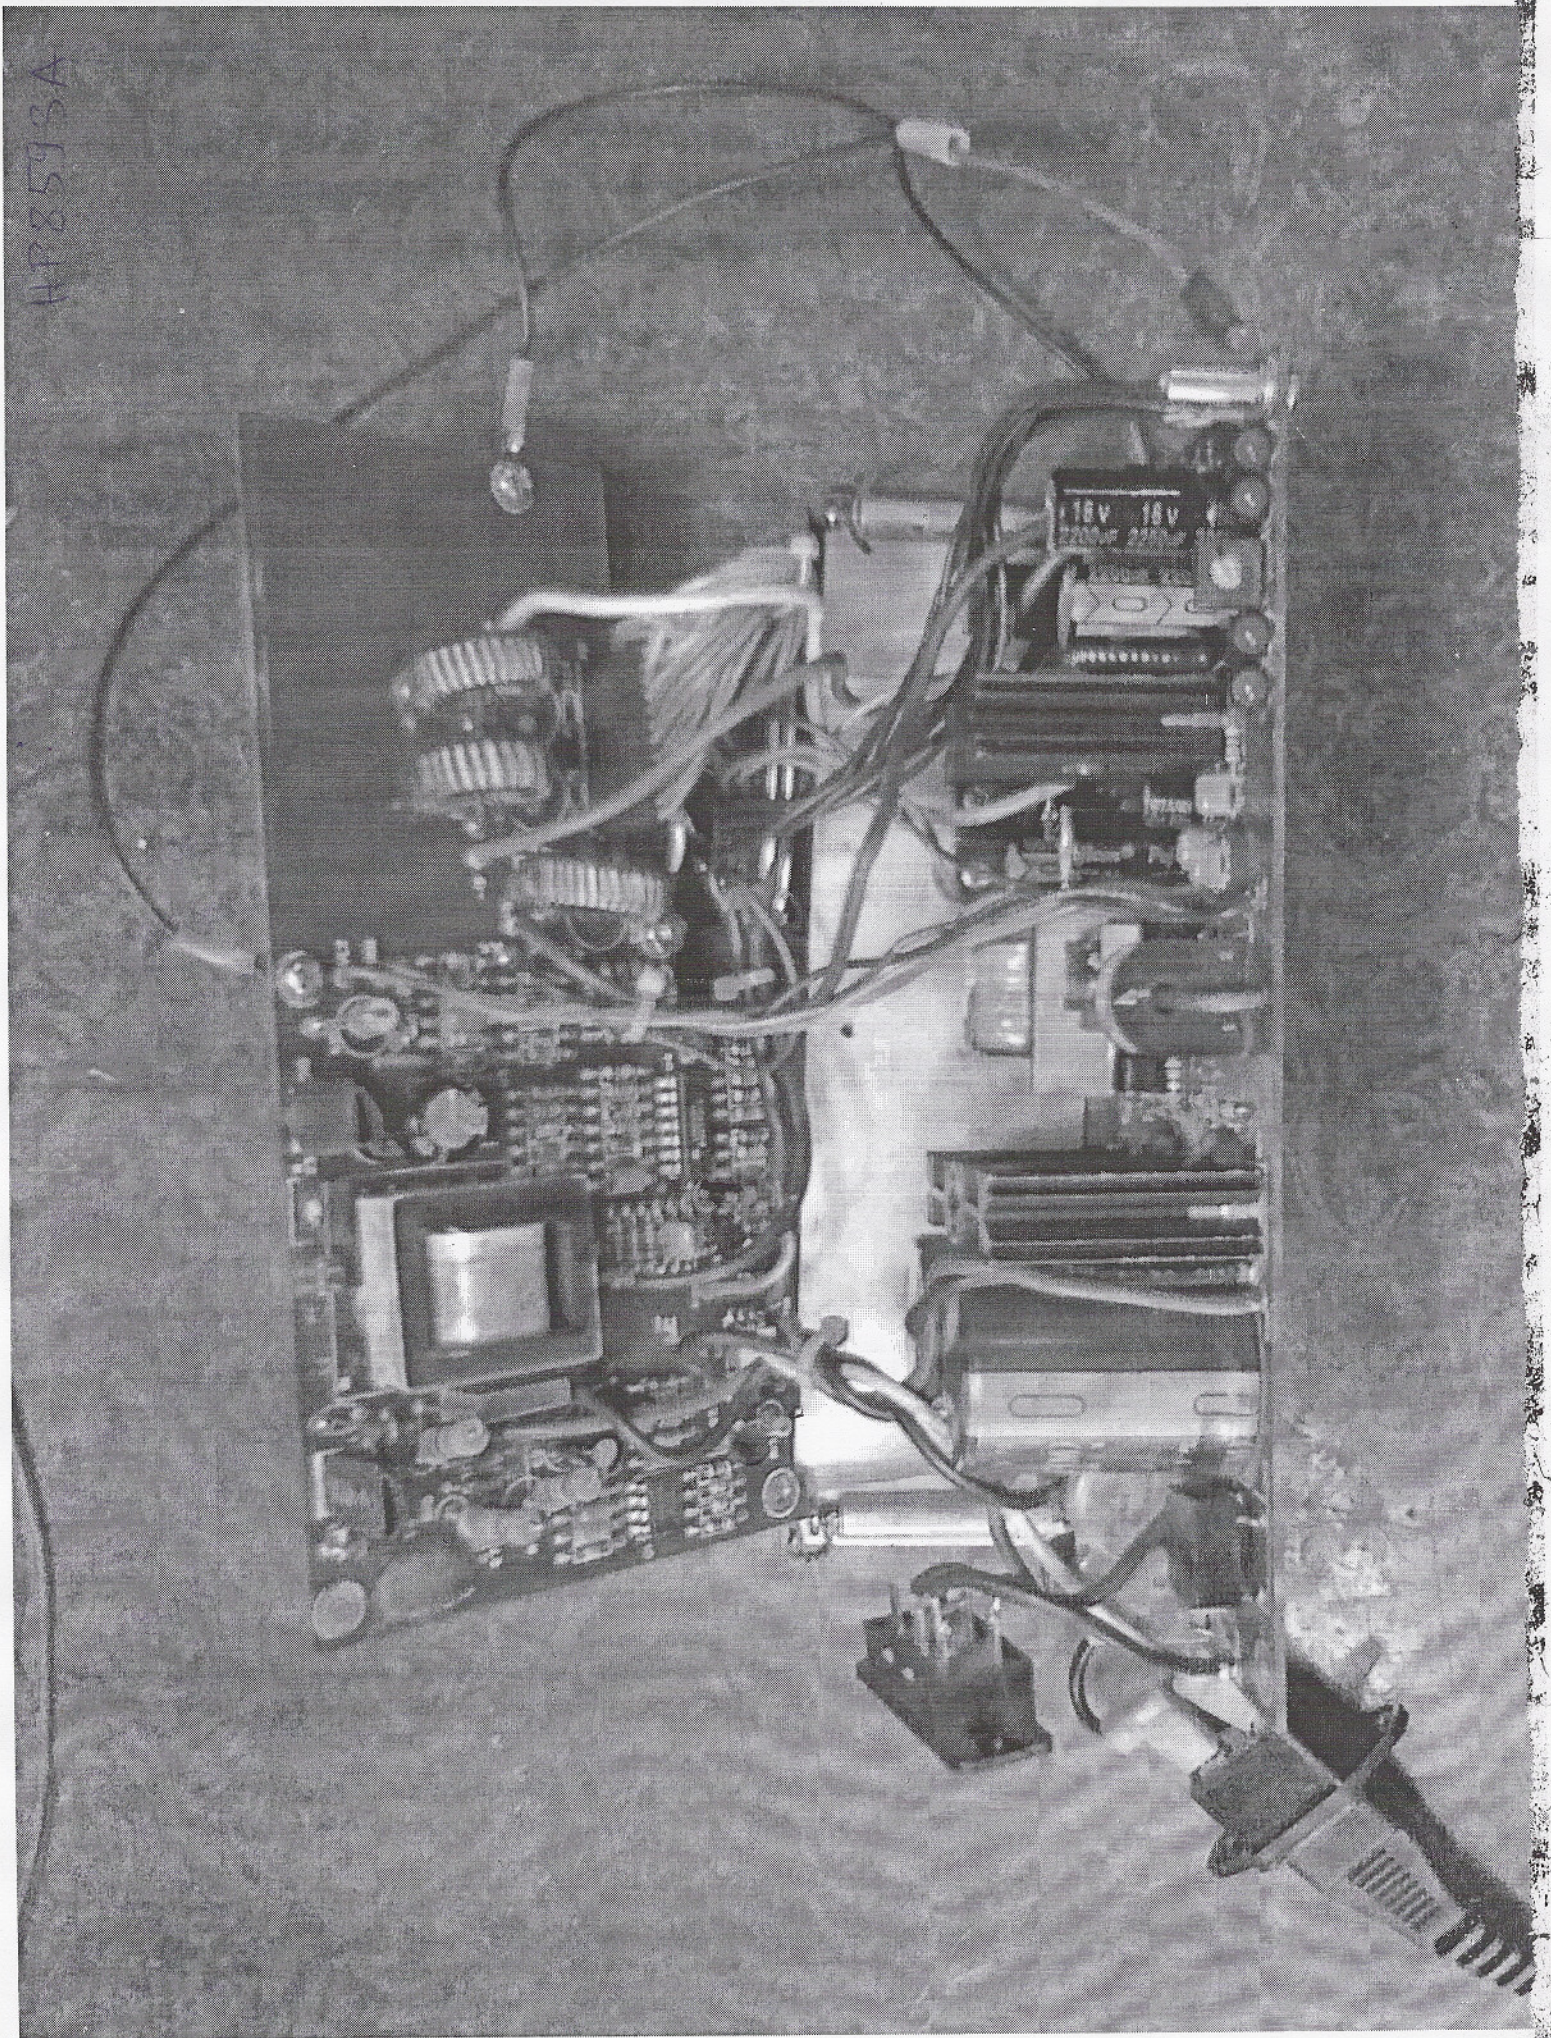

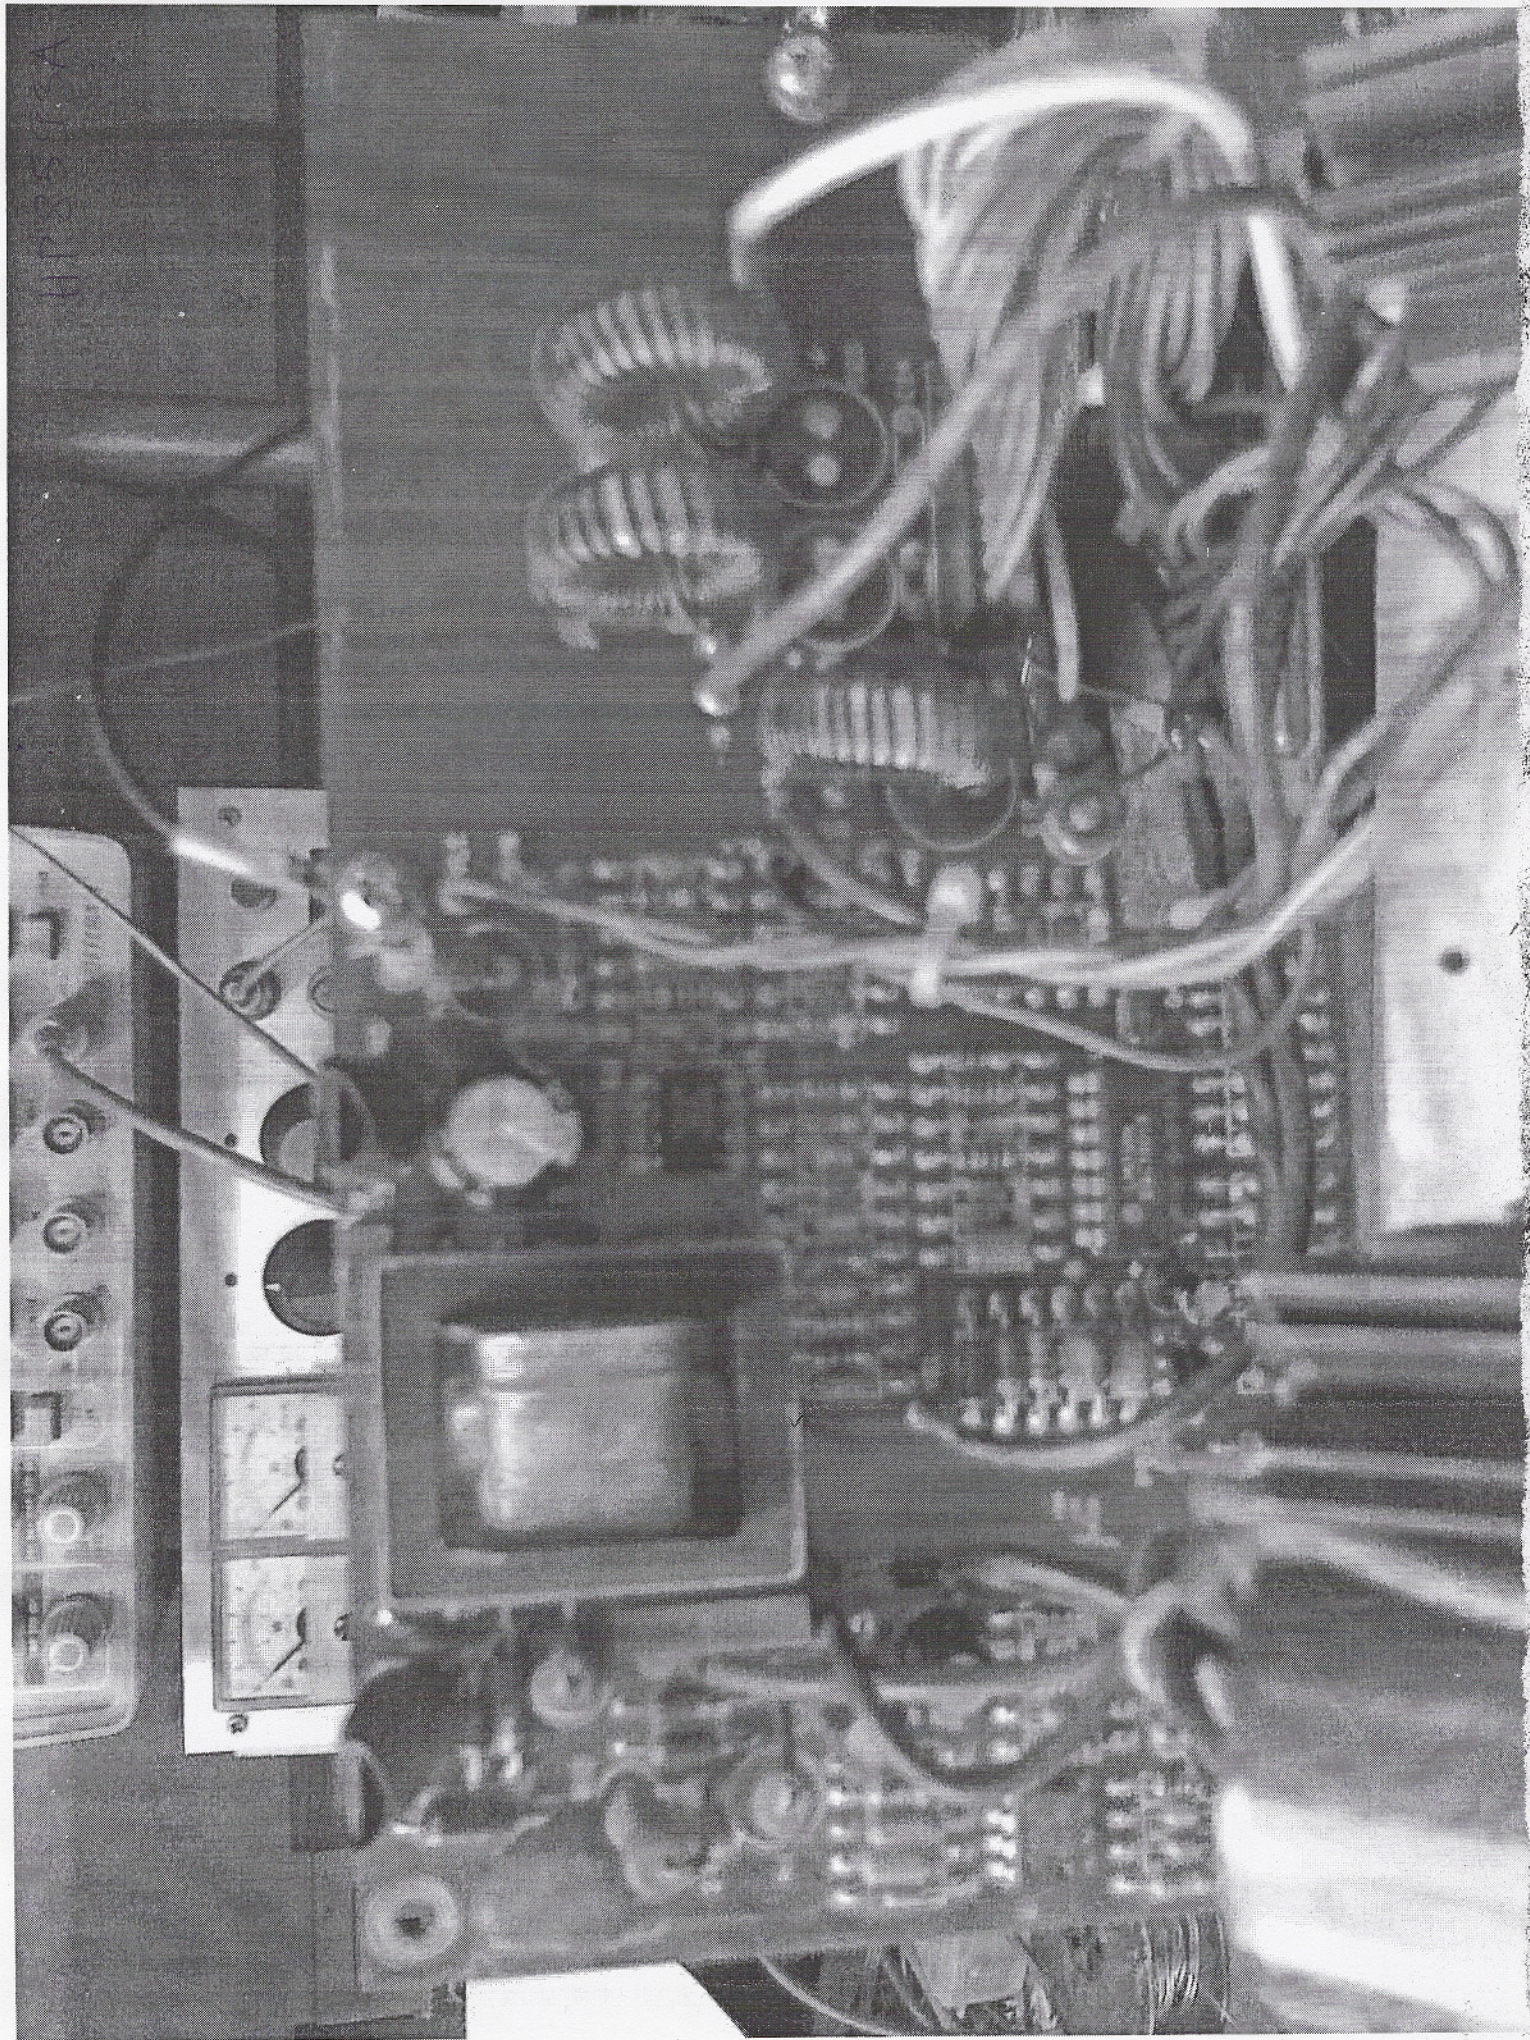


2410L

5MS

5V

4

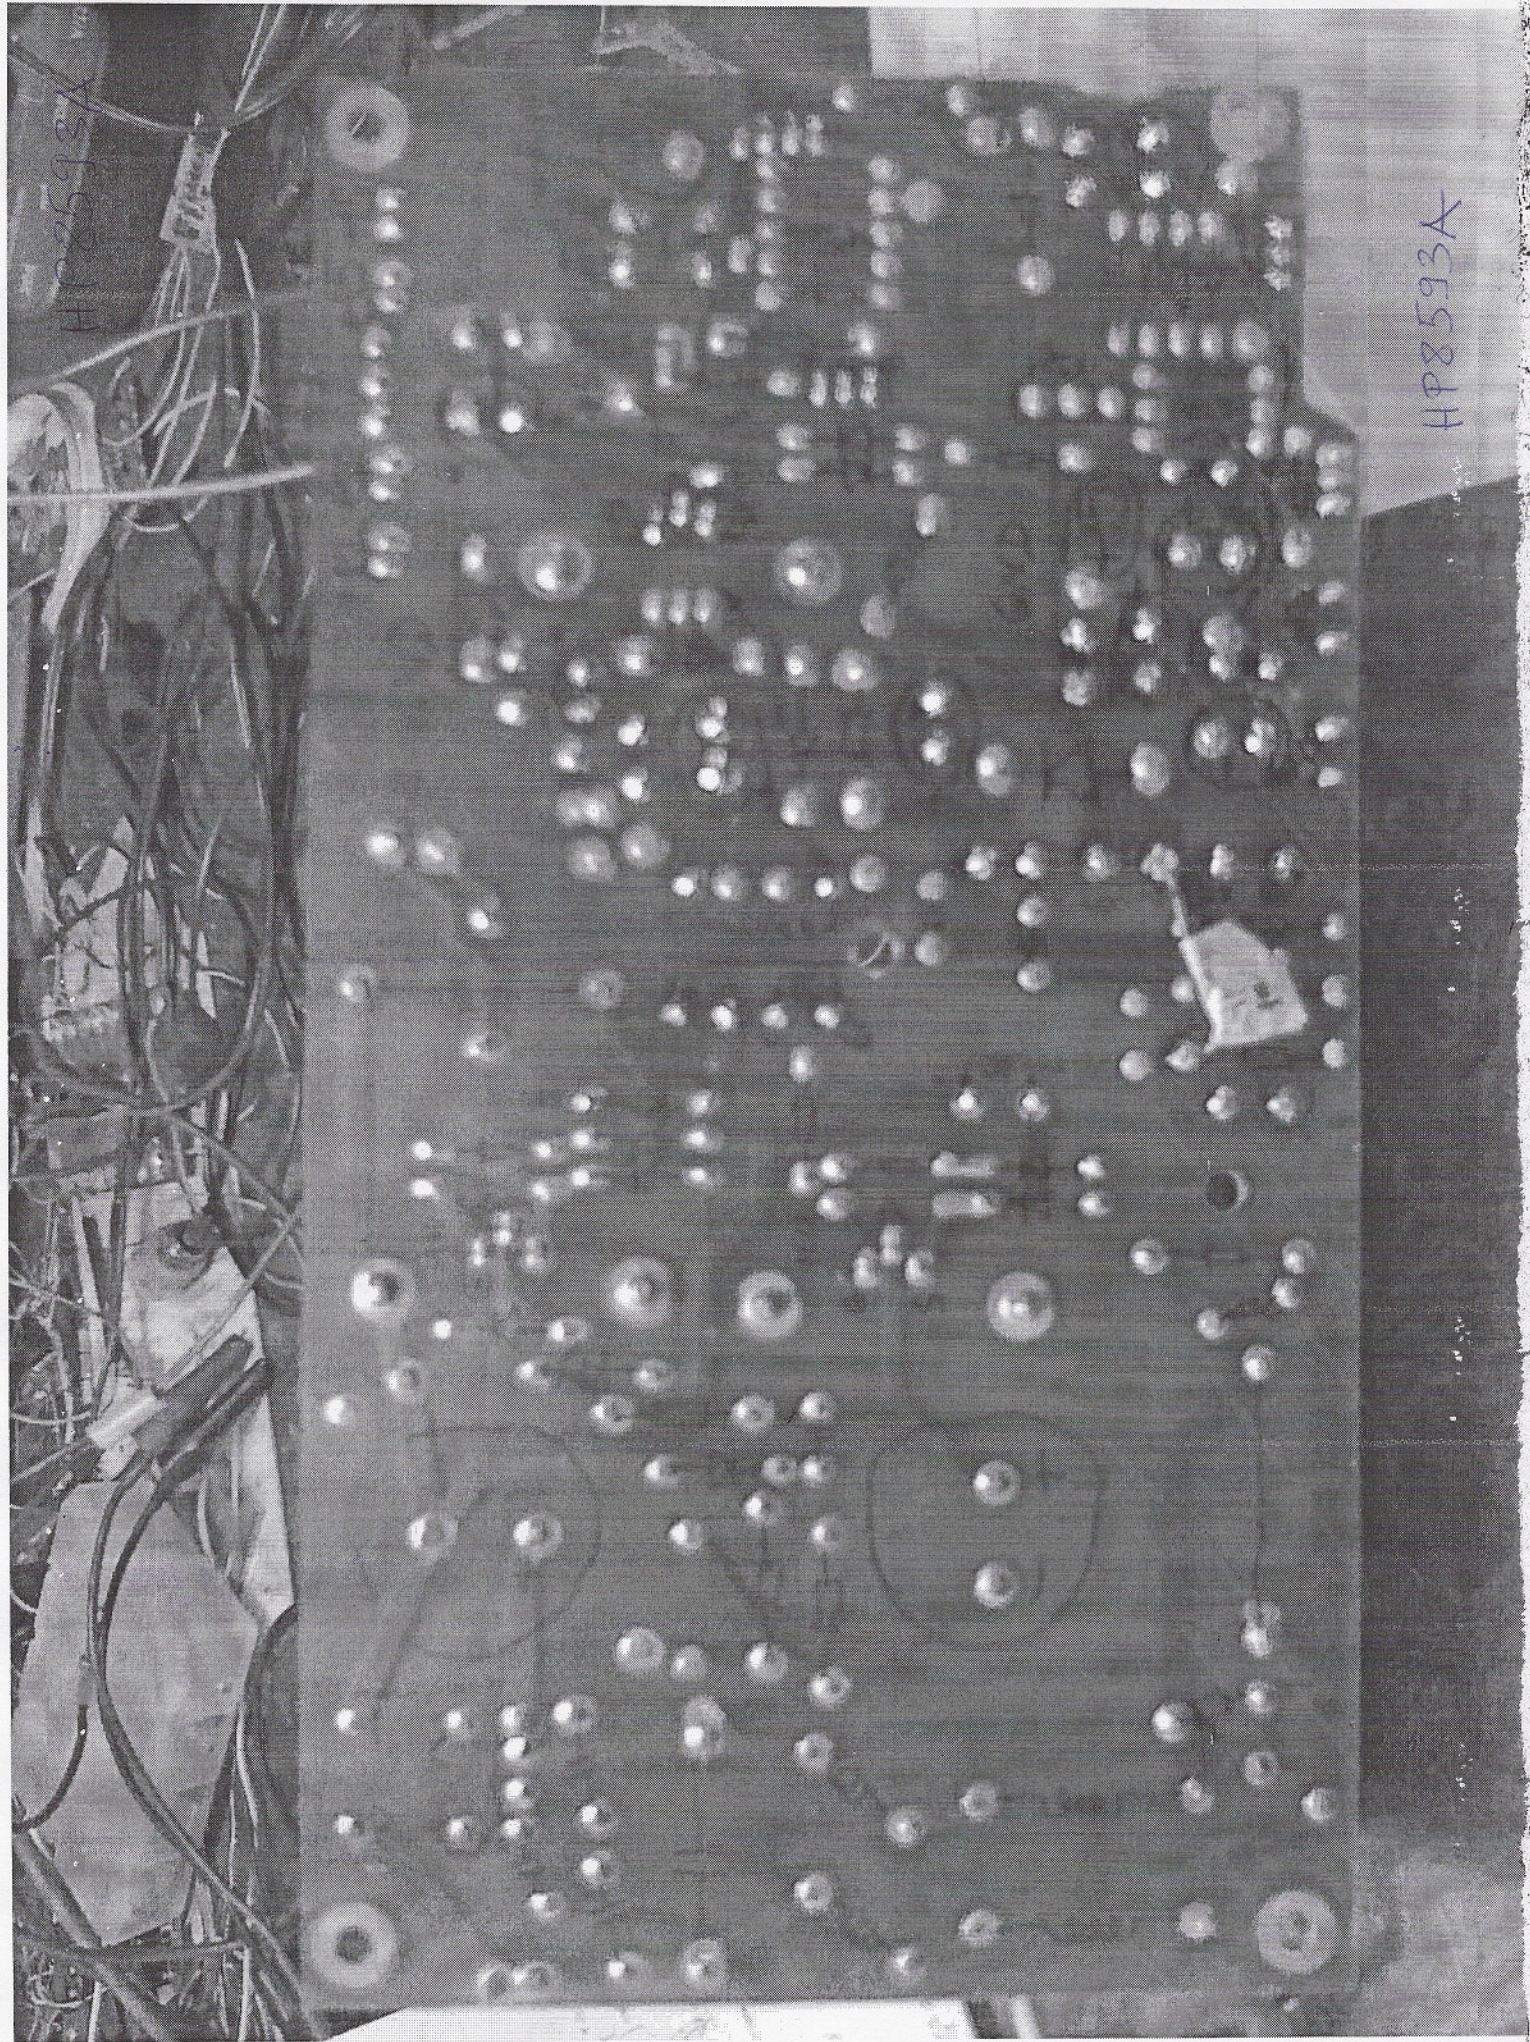

HP8593A

HP8593A

48242

10 μ S

20V

