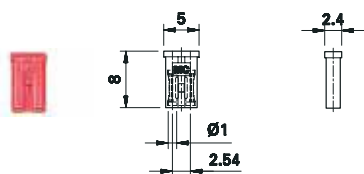


Type Type Type	Bestell-Nr. Order No. No. de Cde	Isolation Griffteil Insulation handle Isolation	Temperaturbereich Operating temperature Température	Metalteile / Oberfläche Metal parts / plating Partie métallique / traitement	Bemessungsstrom Rated current Intensité assignée	Steckweite Plug spacing Entraxe	
			°C		A	mm	

1:1

KB1-2,54/1
24.0053-*

PA

-40...80

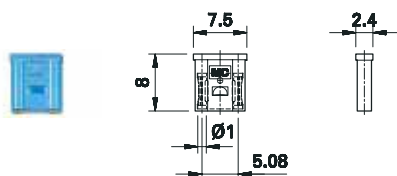
 Cu(Leg) ¹⁾
 Cu(alloy) ¹⁾
 Cu(alliage) ¹⁾

10

2,54

* Farben / Colours / Couleurs

22 23 24 28

1:1

KB1-5,08/1
24.0054-*

PA

-40...80

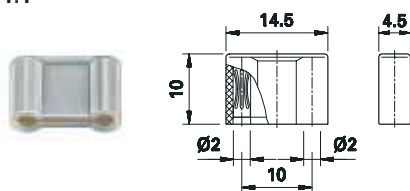
 Cu(Leg) ¹⁾
 Cu(alloy) ¹⁾
 Cu(alliage) ¹⁾

10

5,08

* Farben / Colours / Couleurs

22 23 24 28

1:1

KB2-10
24.0051-*

PA

-40...80

 Cu(Leg) ¹⁾
 Cu(alloy) ¹⁾
 Cu(alliage) ¹⁾

10

10

* Farben / Colours / Couleurs

22 23 24 28


¹⁾ Hartkupferlegierung, vergoldet

¹⁾ Hard-drawn copper alloy, gold plated

¹⁾ Alliage de cuivre dur, doré