

SCT036TS (mA output type)



Characteristic:

Safety lock buckle, easy installation, screw terminal output.

Product picture :(the printed words are for reference only, subject to the actual product)

Technical index:

- Mounting type: Free hanging (In-Line)
- Material of core: Laminated silicon steel
- Applicable standards: GB20840-2014
- Operating temperature: -25℃ ~+60℃
- Storage temperature: -30℃ ~+90℃
- Frequency range: 50Hz-60Hz
- Waterproof grade: IP00
- Dielectric strength: 3.5KV 50Hz 1min



Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)


Rated input	100		200		300		400		500		600		A
Rated output	50	100	50	100	50	100	50	100	50	100	50	100	mA
Turns ratio	1:2000	1:1000	1:4000	1:2000	1:6000	1:3000	1:8000	1:4000	1:10000	1:5000	1:12000	1:6000	—
Accuracy	0.5/0.2	0.5	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	0.5/0.2	%
Sampling resistance	20	10	20	10	20	10	20	10	20	10	20	10	Ω
Weight	310												g

TVS: Transient Voltage Suppressor (7.5V)


Current output type

Secondary is not allowed to open circuit

Dimensions (in mm±0.5) :

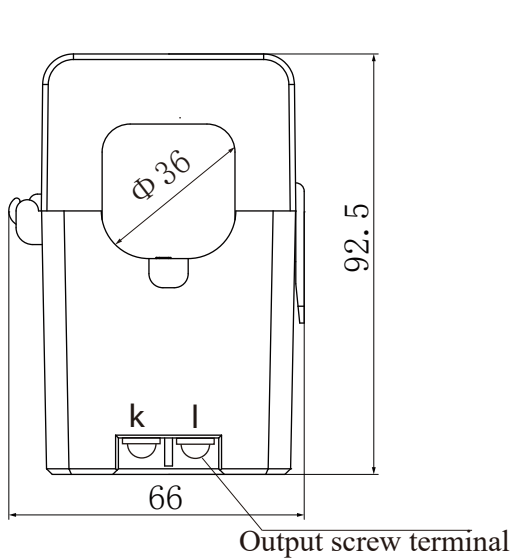

Front view

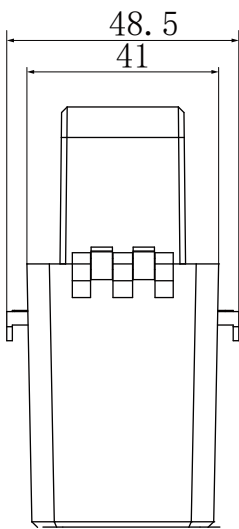

Side view

