




Anwendung / Application



4S Serielle RS-232 / 1P Parallel Multi I/O PCI Karte (Oxford Chip-Set)

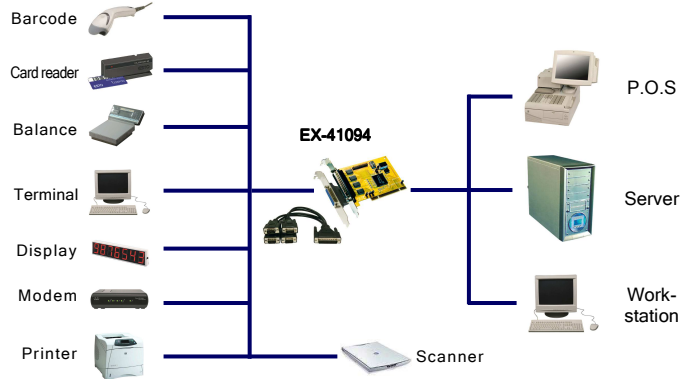

4S Serial RS-232 / 1P Parallel Multi I/O PCI Board (Oxford Chip-Set)

Beschreibung

Die EX-41094 PCI I/O Karte stellt vier serielle RS-232 High Performance UART 16C950 Ausgänge und einen Parallel SPP Ausgang zur Verfügung. Sie ist entwickelt worden um vier weiteren Seriellen Ports für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern. Die Karte ist voll Plug-and-Play kompatibel.

Description

The EX-41094 PCI I/O adapter provides four high performance 16C950-type UART RS-232 serial ports and one Parallel SPP port. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully Plug-and-Play compatible.

Merkmale

- Schnittstelle: RS-232 V.24 / Parallel Centronics SPP
- FIFO Buffer: 16C950 mit 128Byte
- I/O Adressen und Interrupt: wird vom System BIOS vergeben, IRQ Sharing
- Daten Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2 / Parity: none, even, odd, space, mark
- Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Unterstützt Mainboards mit 5V und 3.3V
- Windows WHQL Zertifiziert

Features

- Interface: RS-232 V.24 / Parallel Centronics SPP
- FIFO Buffer: 16C950 with 128Byte
- I/O addresses and Interrupt: Setting from the System BIOS with IRQ Sharing
- Data Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2 / Parity: none, even, odd, space, mark
- Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Support Mother-Board with 5V and 3.3V
- Windows WHQL certified

Spezifikationen

- **Chip-Set:** Oxford OX16PCI954
- **Datentransfer-Rate:** 50Baud bis 921.6KBaud
- **Anschlüsse:** 4 x 9 Pin D-SUB Seriell Stecker (mit Octopus Kabel)
1 x 25 Pin D-SUB Parallel Buchse
- **Hardwaresysteme:** PCI und PCI-X Slot, 32-Bit, 33Mhz
- **Treiber:** Win98SE/ NT 4.0/ ME/ 2000/ XP/ Vista/ 7/ 8 (32&64)
Linux
- **Betriebstemperatur:** 0° bis 55° Celsius
- **Lagertemperatur:** -40° bis 75° Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Stromversorgung:** 3,3 oder 5Volt über PCI Slot
- **Abmessung:** 120 x 76 mm
- **Gewicht:** 450g
- **Lieferumfang:** EX-41094, 1 x Octopus Kabel, 1 x Slot Kabel Parallel,
Treiber CD, Handbuch

Specifications

- **Chip-Set:** Oxford OX16PCI954
- **Data transfer rate:** 50Baud bis 921.6KBaud
- **Connectors:** 4 x 9 pin D-SUB serial connector (with Octopus cable)
1 x 25 Pin D-SUB Parallel female connector
- **Hardware system:** PCI and PCI-X Slot, 32-Bit, 33Mhz
- **Driver:** Win98SE/ NT 4.0/ ME/ 2000/ XP/ Vista/ 7/ 8 (32&64)
Linux
- **Operating Temperature:** 32° up to 131° Fahrenheit
- **Storage Temperature:** -40° up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Current Supply:** 3.3 or 5Volt via PCI slot
- **Size:** 120 x 76 mm
- **Weight:** 450g
- **Packaging contents:** EX-41094, 1 x Octopus cable, 1 x Slot cable Parallel,
Driver CD, Manual

System / OS



Geprüft / Approved



Verpackung / Packaging

