


SHIELDED COMPARTMENT

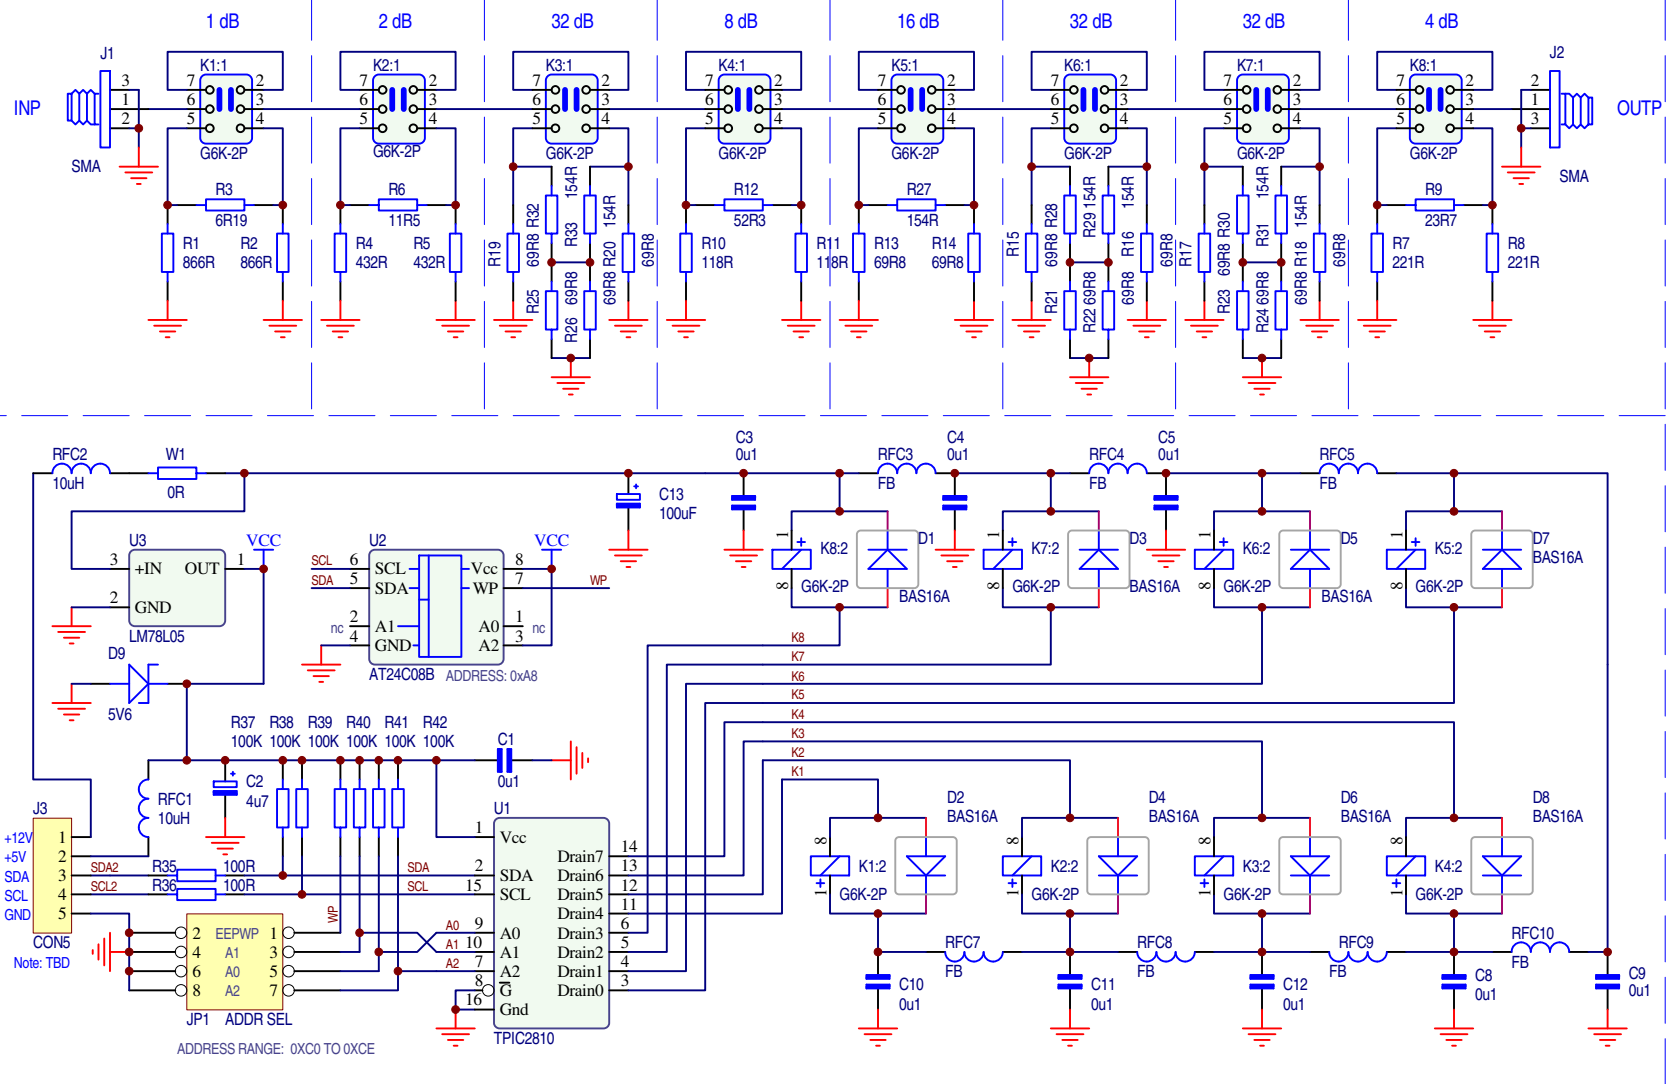

Note: Unless otherwise specified, all values are as follows:  
 resistor values are in Ohms, i.e. 0R47, 5R6, 220, 5K6, 22K  
 capacitor values are in Microfarads, i.e. 220p, 0u1, 2u2, 33  
 inductor values are in Microhenries, i.e. 0u22, 5u6, 68, 2m2

Last Used Components

C13	RFC10
D9	U3
J3	W1
K8	R42

Modified: GJO

Last Change: 10/05/08

Scale: 508

Approved: n/a

PCB Name: DDS\_ATT.PCB

By: GJO

Time: 17:55:46

File: DDS\_ATT.sch

Name:

DDS Generator

Prj. No.:

09037G

Title:

I2C Attenuator 0-127dB bis 250MHz

Date:

8-May-2010

Size:

A

Dw. No.:

09037G-DDS-ATT\_B-E01

Rev:

2

Sheet 1 of 1