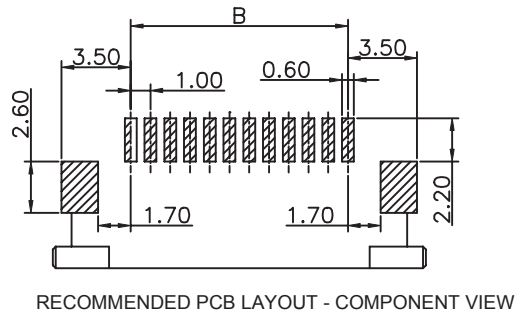
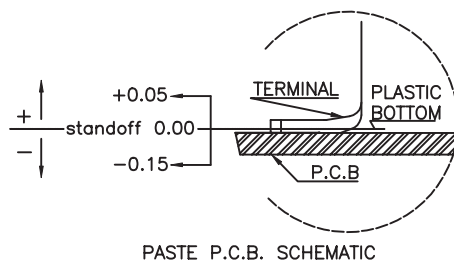
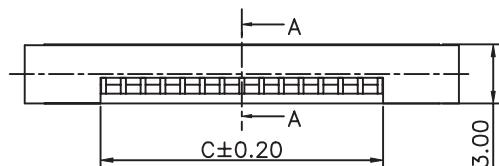
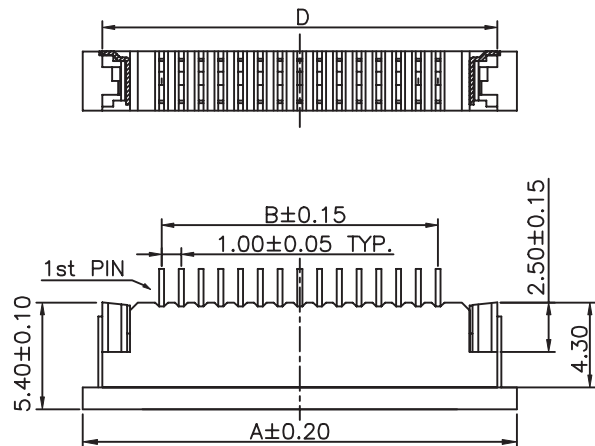



MATERIAL:
HOUSING MATERIAL: PPS
COLOR: BEIGE
ACTUATOR MATERIAL: PPS
COLOR: BROWN
CONTACT MATERIAL: PHOSPOR BRONZE
CONTACT PLATING: 100μ TIN OVER 50μ NI
QUALITY CLASS: 25 MATING CYCLES




ENVIRONNEMENTAL:
OPERATING TEMPERATURE: -25°C UP TO 85°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL:
CURRENT RATING: 1A
WORKING VOLTAGE: 125V
INSULATION RESISTANCE: >100MOHM
DIELECTRIC WITHSTANDING VOLT.: 500VAC/MN
CONTACT RESISTANCE: 20mOHM MAX

SOLDERING:
REFLOW PROCESS ONLY

DIMENSION:
A = B + 8.00
B = 1.00 x (NB PINS - 1)
C = B + 2.1
D = B + 6.00

RoHS Compliant							
G				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK	
F							
E							
D	29-JUL-08	INSERTION DEPTH	CH				
C	26-NOV-07	MODIFICATIONS	EC	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 1.0MM ZIF FPC HORIZONTAL BOTTOM CONTACT TYPE - TAPE & REEL PACKAGING	SIZE A4
B	14-MAR-07	CHARACTERISTIC	EC		SCALE:		
A	02-OCT-06	PDF	JP		SHEET: 1/2		
REV	DATE	FILE	BY		DRAW: PEARL	WERI PART NO: 6861 xx 14422	

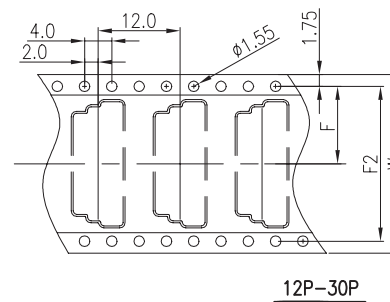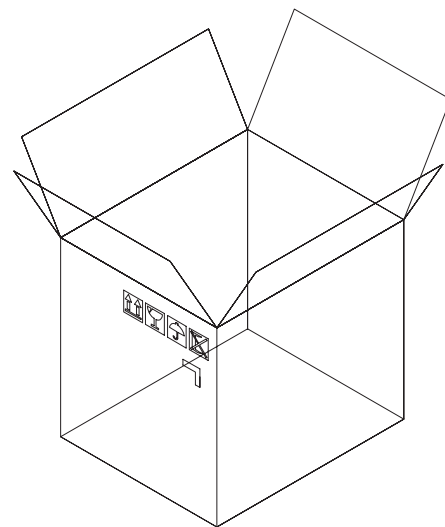

PIN數	W	F	F2	
04PIN 11PIN	24mm	11.5mm		0.30mm
12PIN 15PIN	32mm	14.2mm	28.4mm	0.30mm
16PIN 22PIN	44mm	20.2mm	40.4mm	0.30mm
24PIN 30PIN	56mm	26.2mm	52.4mm	0.30mm

NOTE:
1.10 sprocket hole pitch cumulative tolerance
2. Carrier camber is within 1 mm in 100mm

RoHS Compliant					GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15		DESCRIPTION: 1.0MM ZIF FPC HORIZONTAL BOTTOM CONTACT TYPE - TAPE & REEL PACKAGING WERI PART NO: 6861 xx 14422	SIZE A4
G								
F								
E								
D	29-JUL-08	INSERTION DEPTH	CH	APPROVAL: RJ	UNIT: MM			
C	26-NOV-07	MODIFICATIONS	EC		SCALE:			
B	14-MAR-07	CHARACTERISTIC	EC		SHEET: 2/2			
A	02-OCT-06	PDF	JP		DRAW: PEARL			
REV	DATE	FILE	BY					