


NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

REMARK

1. Glass Thk: 0.7mm
2. Film Type: Anti-Glare
3. Total Thk: 1.0 ± 0.1 mm
4. Linearity: $\pm 1.8\%$ or less
5. Transmittance: 80% or more
6. Resistance
 400<X<1200 ohm (Typ: 750 ohm)
 100<Y<700 ohm (Typ: 300 ohm)
7. Connector: FPC
8. General Tolerance : ± 0.3 mm


CIRCUIT DIAGRAM

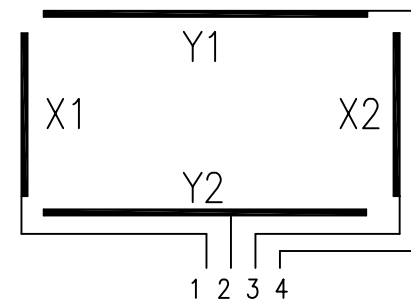

SIGNAL ASSIGNMENT

Pin No	Signal
1	X1
2	Y2
3	X2
4	Y1

Detail "AA" (Scale=3/1)

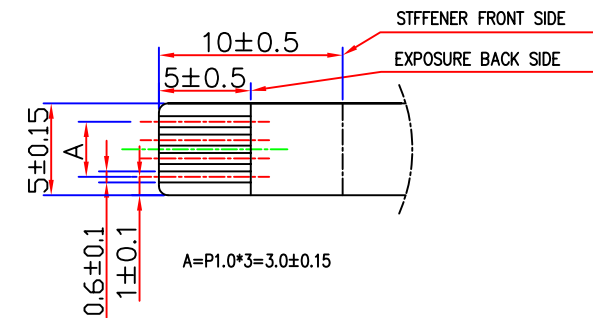

1		42.75 → 15.0	05.03.17	B. J. LEE	J. W. AHN
0		0.95 → 1.0 ± 0.1	05.03.15	B. J. LEE	J. W. AHN
REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED

APPROVE	UNIT	mm	PROJECTION	DRAWING NO.	REV.
CHECK	SCALE	NONE		HTO43A-NCOFD52-R	
DESIGN	DESCRIPTION			SHEET	
DRAW	4.3 TOUCH PANEL			1/1	

HantouchUSA
 Touch Screen Specialists