

teXet

TF-118

TF-100

1CH AUDIO/SPEAKER

EUA2011

AIC7134

FULL FUNCTION
16Mb FLASH 2Mx8Bit

PHOTO ONLY
8Mb FLASH 1Mx8Bit

FULL FUNCTION
SDRAM -4Mx16 bit (64M bit)

PHOTO ONLY
SDRAM -1Mx16 bit (16M bit)

SPI SD CARD

AML6210DP

Digital LCD

3 IN 1 Card
Reader

TWO USB
PORT

RTC

5VIN 2A

LDO AS1117-3.3

LDO AS1117

5v


5v

5v


3.3V

1.2V





R & L (OUT)

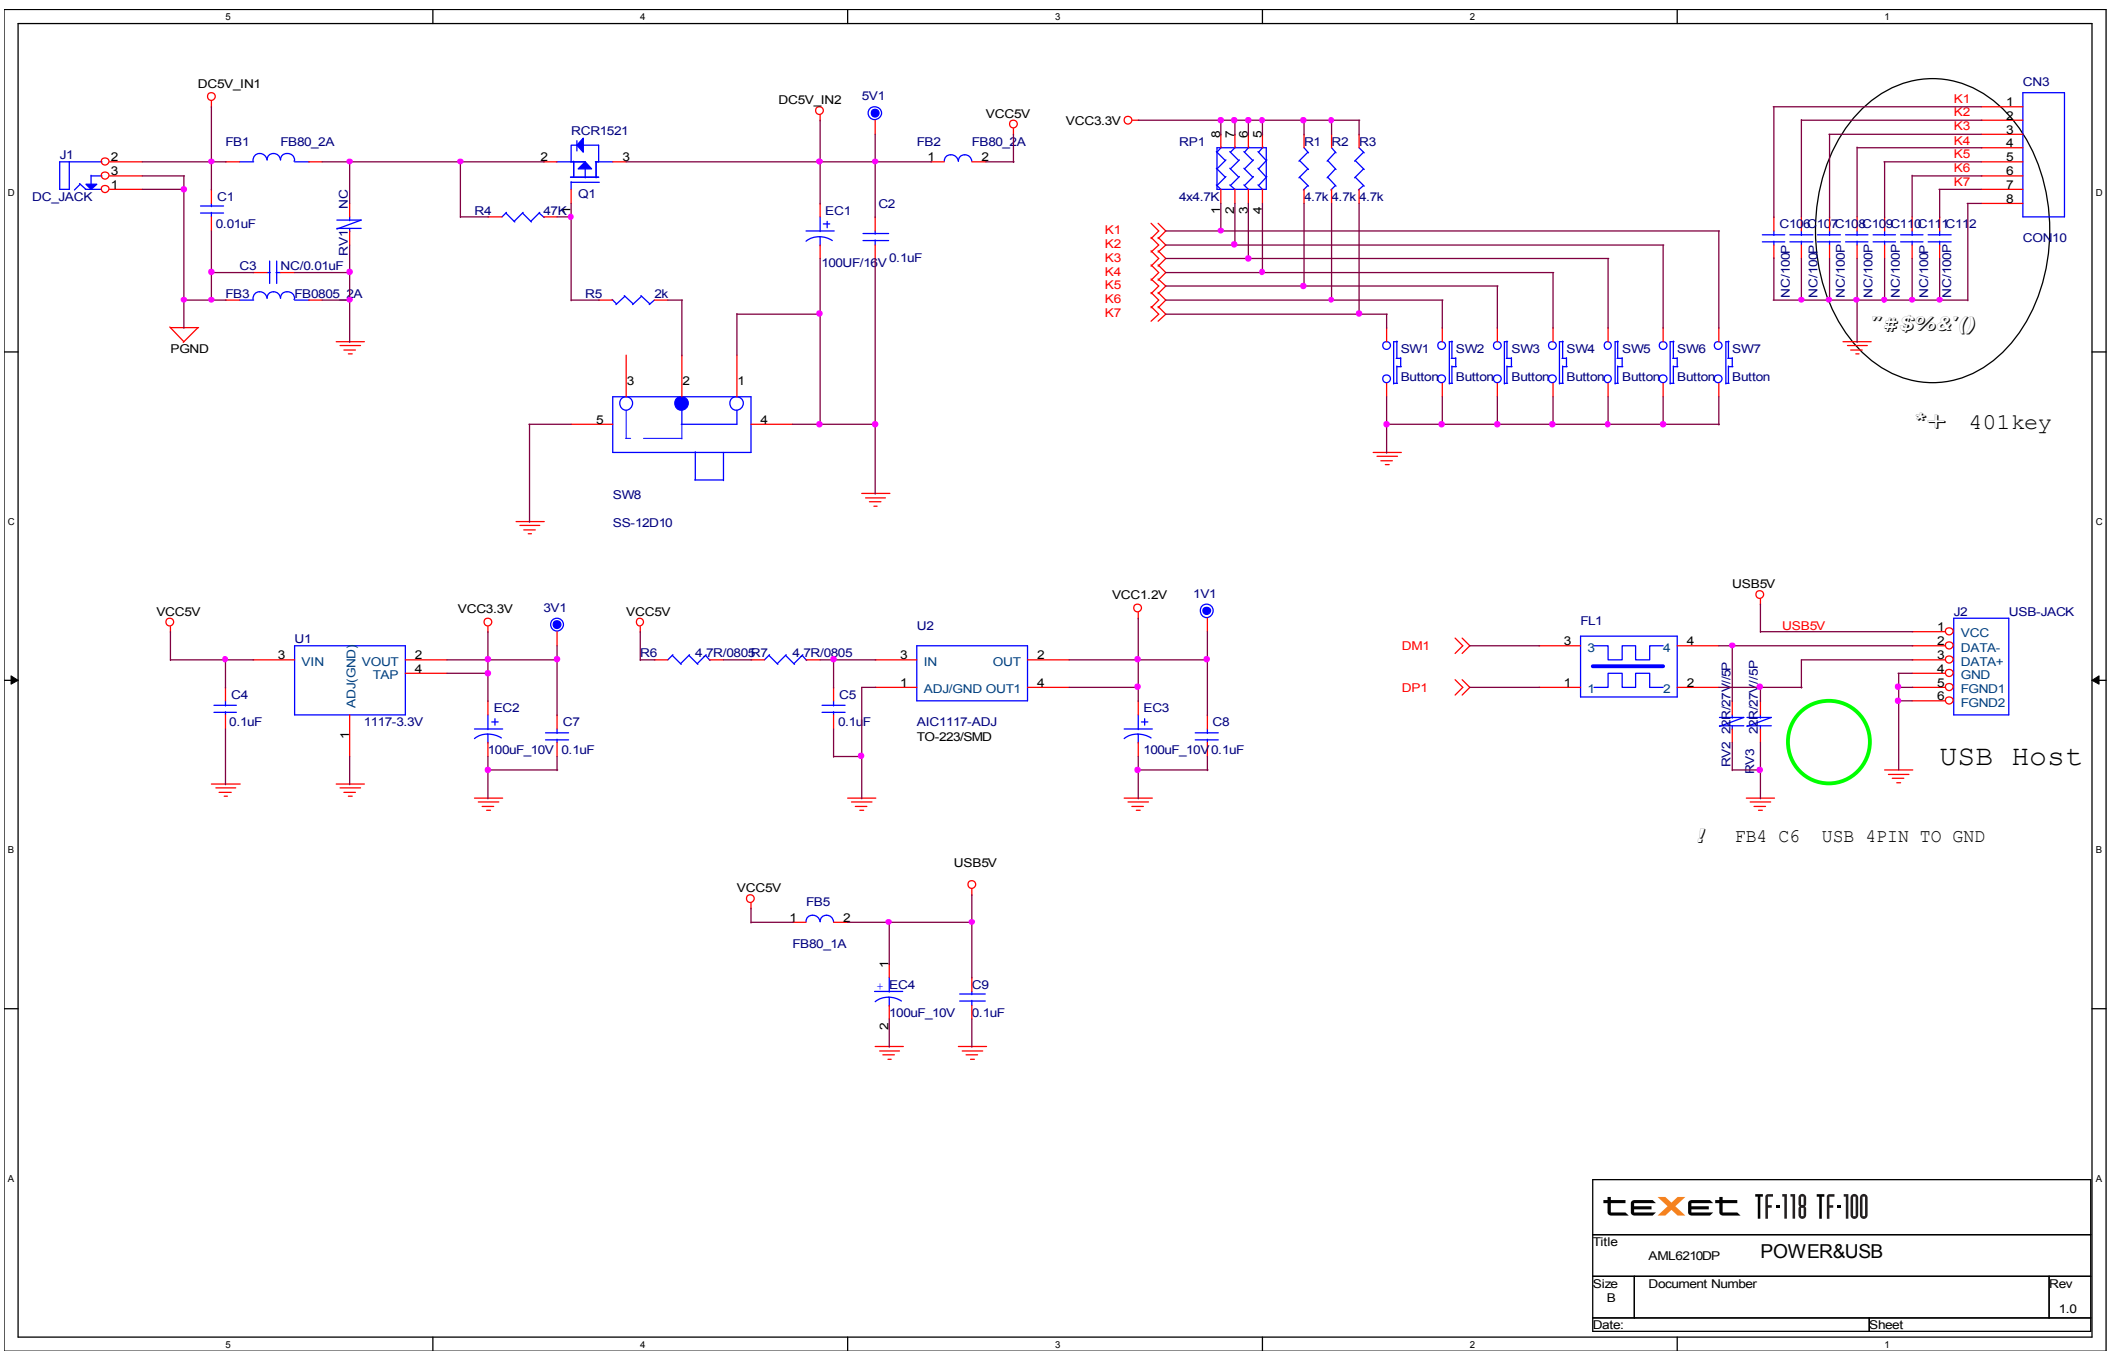






teXet TF-118 TF-100		
Title	AML6210DP POWER&USB	
Size B	Document Number	Rev 1.0
Date:	Sheet	

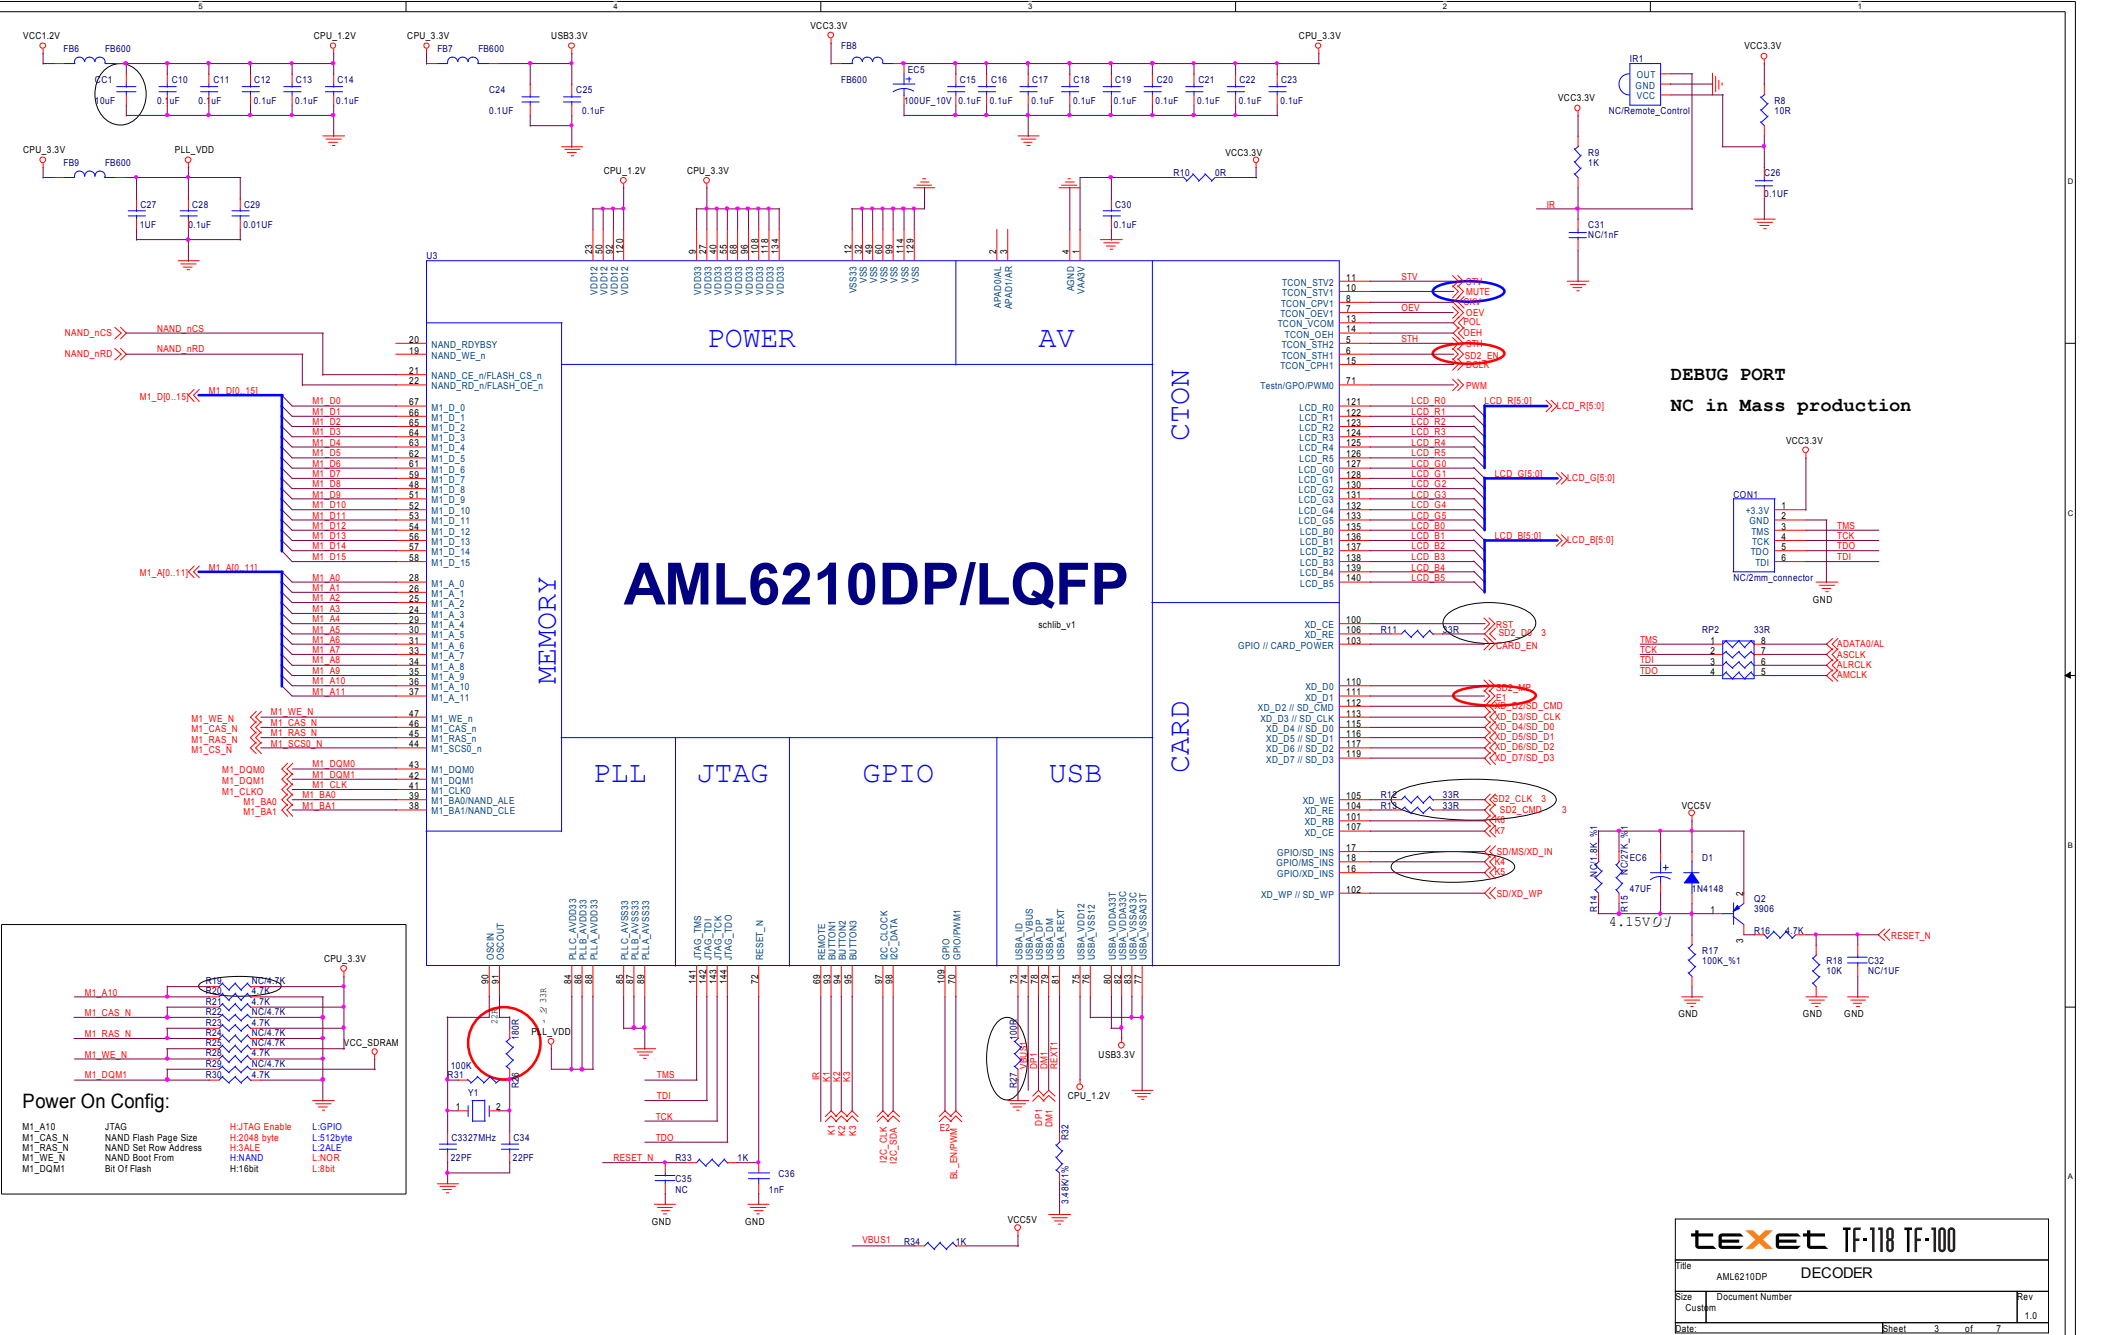

SDRAM

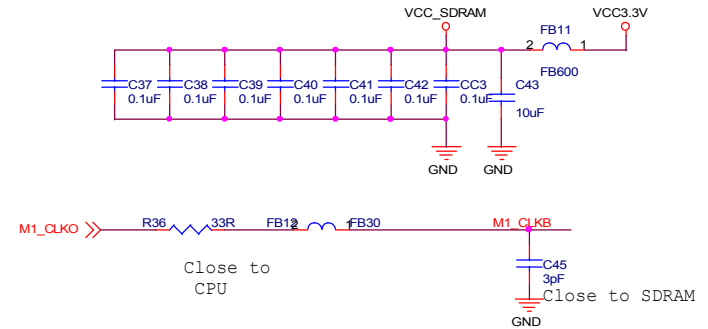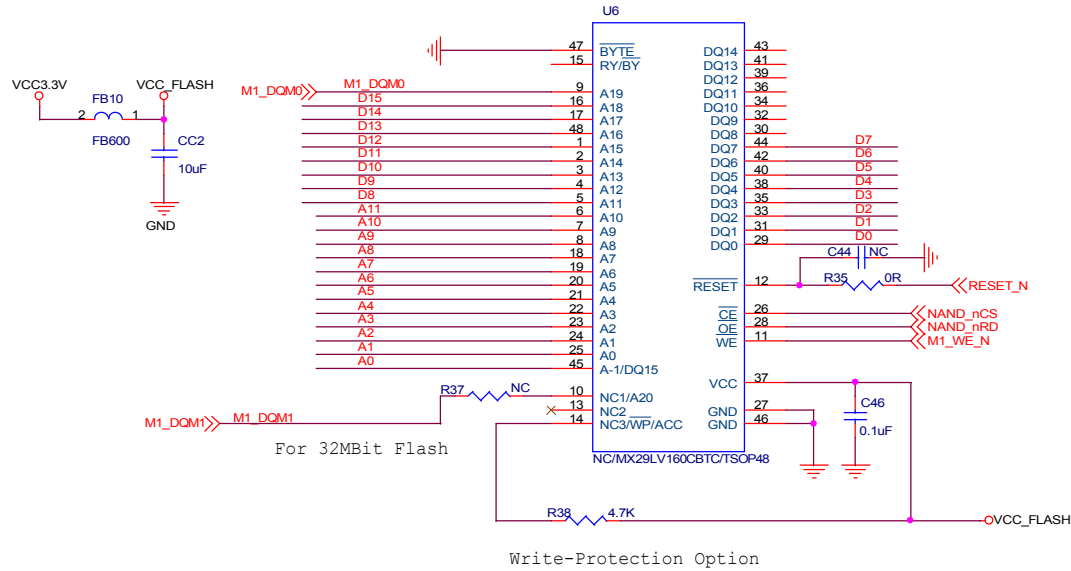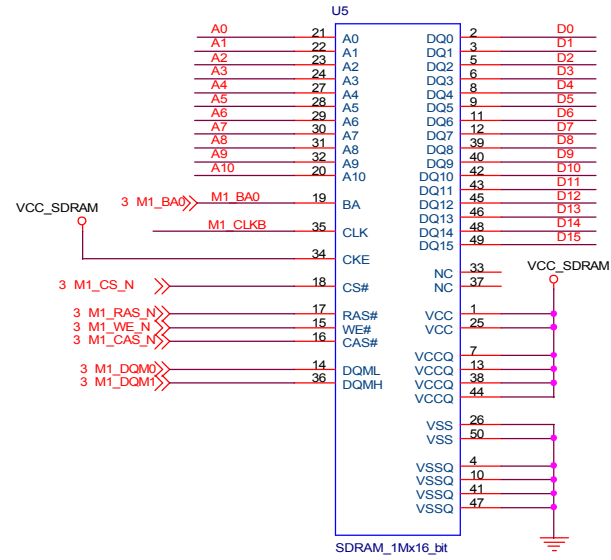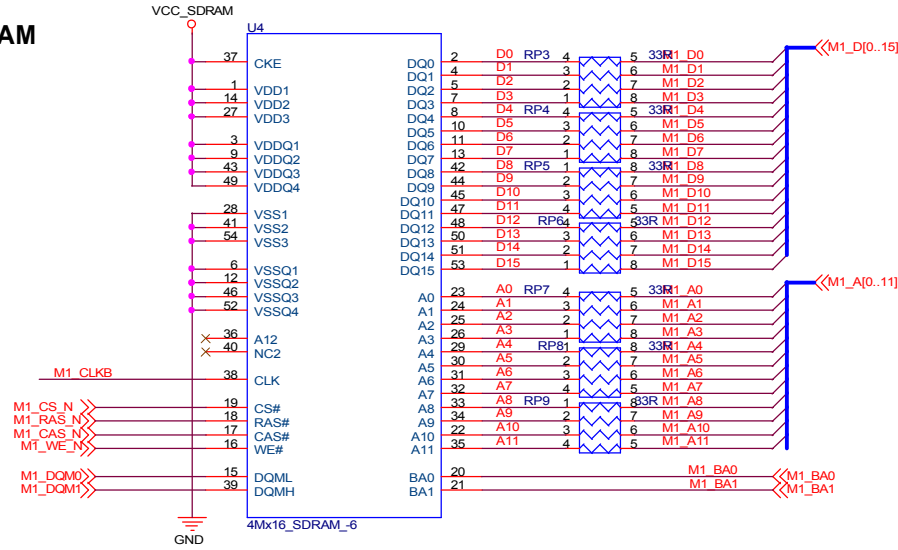


teXet TF-118 TF-100			
Title		FLASH&SDRAM	
Size B		Document Number	
Date:		Friday, January 15, 2010	
Sheet		4 of 7	
Rev		1.0	

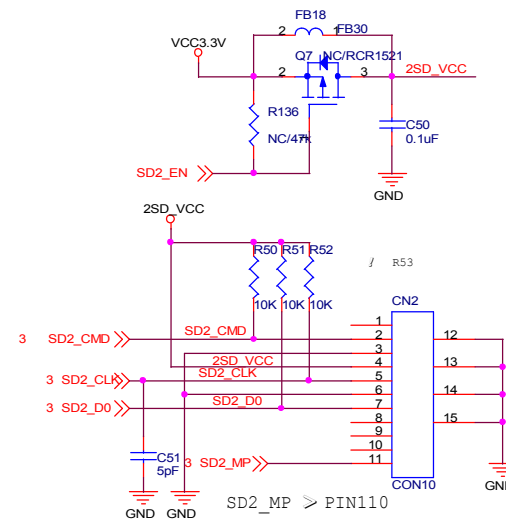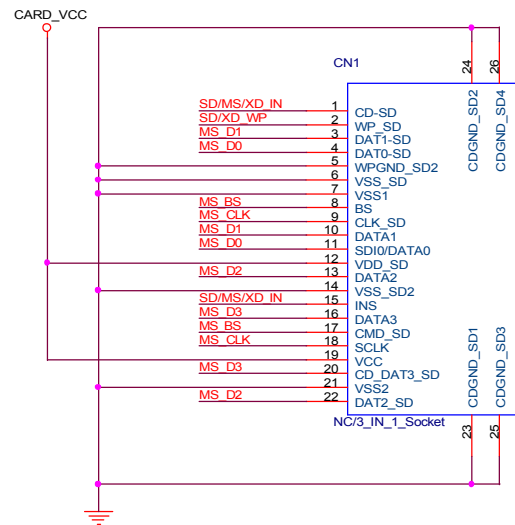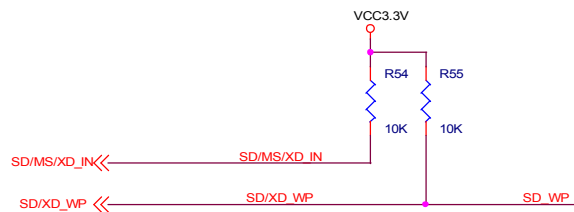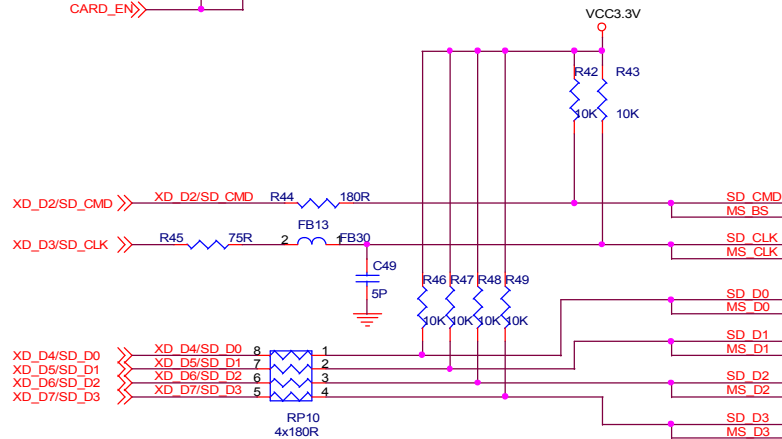
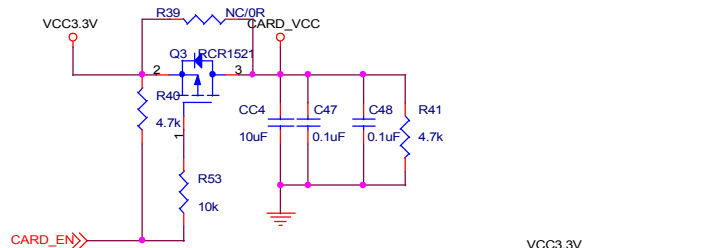


- 9 DAT2
1 CD/DAT3
2 CMD
3 VSS1
10 SD_IN
11 MP
4 VDD
5 CLK
6 VSS2
7 DAT0
8 DAT1

teXet TF-118 TF-100		
Title	AML6210DP CARD READER	
Size B	Document Number	Rev
Date:	Sheet 5 of 7	1.0

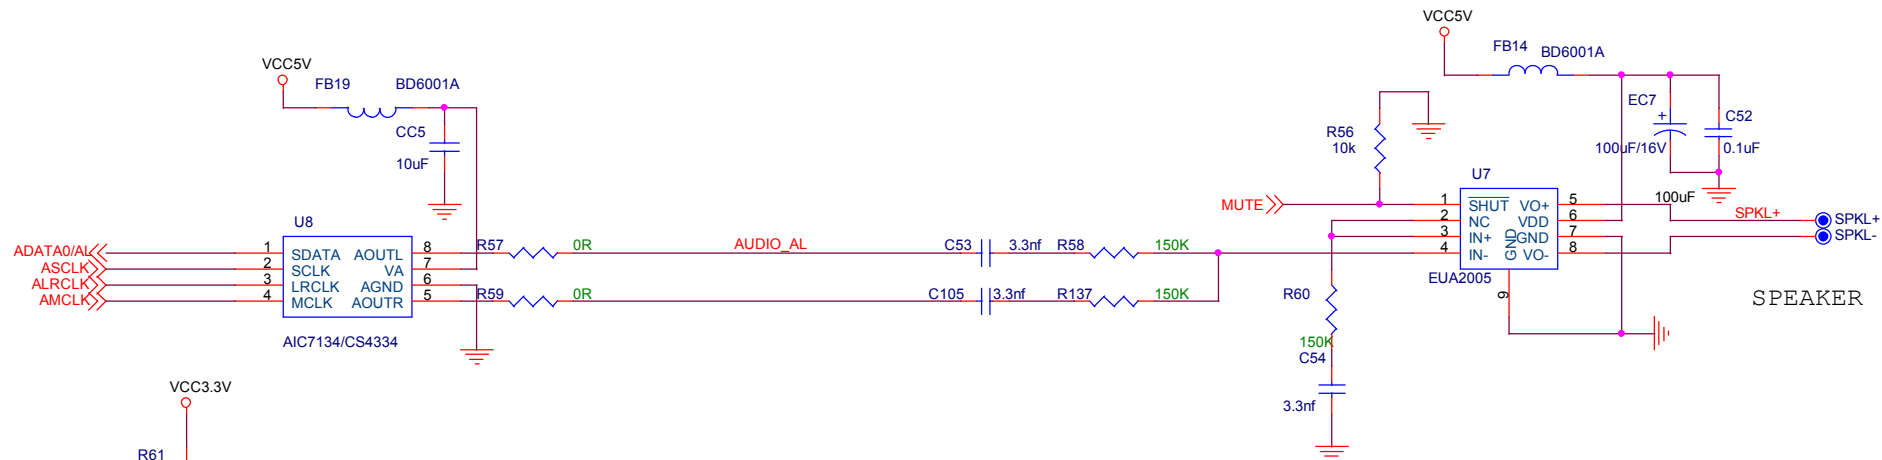

RTC Circuit

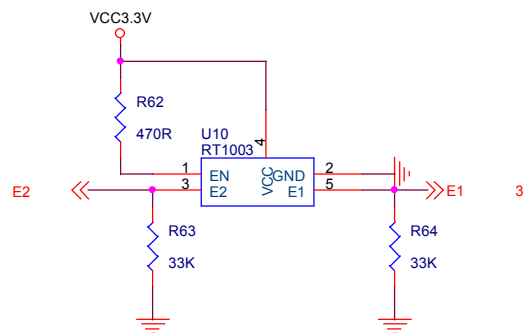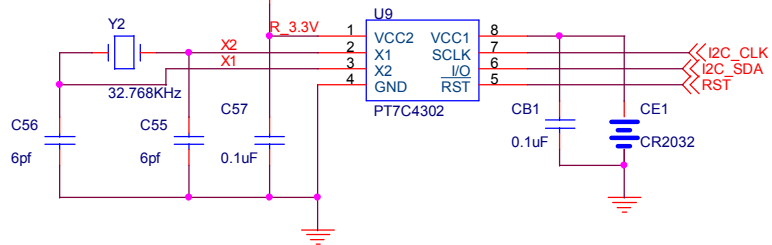

MOTION SENSOR

texet TF-118 TF-100		
Title		AML6210DP AUDIO&TOUCH KEY
Size	Document Number	Rev
Custom		1.0
Date:	Sheet 6 of 7	

