


ANALOG IN LOW  
 ANALOG IN HIGH  
 ANALOG RETURN OUT  
 REF INP  
 REF OUT  
 RUN-/HOLD  
 POWER COMMON  
 DISP TEST INP  
 DP IN 123.4  
 DP IN 12.34  
 DP IN 1234  
 POLARITY ENABLE IN  
 -5V OUT  
 -5V INP

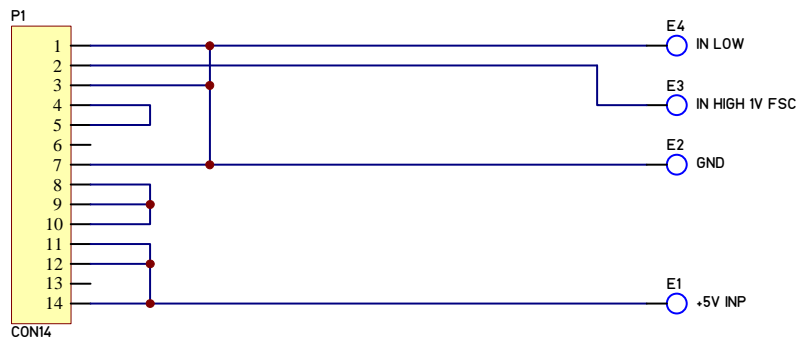

Unless otherwise specified, all values are as follows:  
 resistor values are in Ohms, i.e. 0R47, 5R6, 220, 5K6, 22K  
 capacitor values are in Microfarads, i.e. 220p, 0u1, 2u2, 33  
 inductor values are in Microhenries, i.e. 0u22, 5u6, 68, 2m2

PCB Name: *Main Board*

Title *DM-LX3 Minimal Wiring Diagram*

PCB Nr: *PCA-7265*

PCB Type: *N/A*

Used in *DM-LX3 DPM*

Repl.for *N/A*

Build No. *1*

This drawing is our property. Duplication,  
 unauthorized use of any kind is  
 prohibited.

Approval:

	Date	Name	Change Index	Change Notification Nr.	Date	Name
Drawn	<i>24-Mar-2015</i>	<i>GJO</i>				
Modified						
Checked						
<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Production	<input type="checkbox"/> BOM Done?				

Scale: *EL*

Prj. Nr

*15015*

Drw. Type: *PCB Schematic*

Size: *A*

Rev: *1*

Drw. Nr  
*4415-0023-2*

File: *Wiring.sch*

Sheet *1* of *2*