


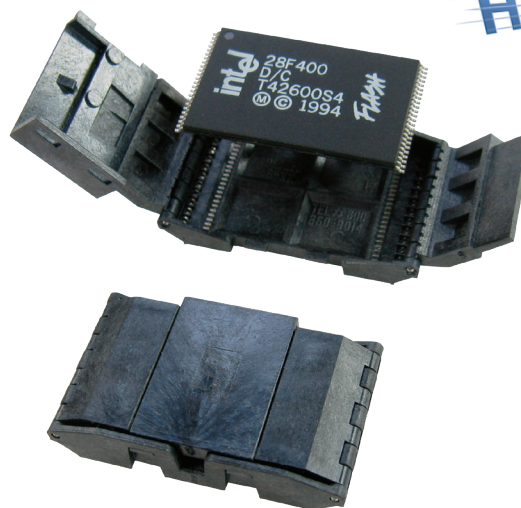

Features & Benefits

- For OEM, prototyping, programming and test applications
- Surface mount
- Zero insertion force
- Land-pad footprint common for package and socket
- Positive locking lid design
- Effortless loading and unloading
- High normal-force contacts
- Available without alignment pins for pick and place
- Available with alignment pins to facilitate hand placement
- Standard packaging is in trays or tape and reel configurations
- RoHS Compliant products available

Specifications

Electrical

- Contact resistance: 30 milliohm (maximum)
- Current rating: 0.5 amp
- Dielectric-withstanding voltage: 250 VAC
- Insulation resistance: 500 MΩ




Mechanical

- Contact material: Copper Alloy
- Minimum insertion/withdrawal cycles: 50


Environmental

- Flammability 94V-0
- Operating temperature: -55 °C to +105 °C



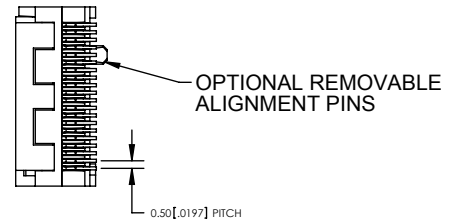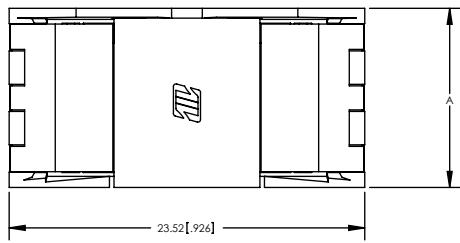

SOCKET LAND-PAD FOOTPRINT

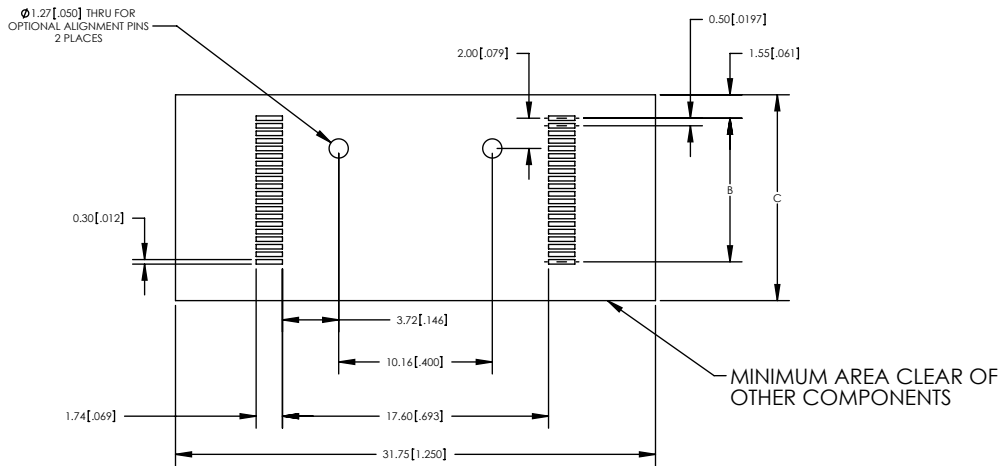


MILLIMETERS (INCHES)


DIMENSION CHART

PACKAGE	#LEADS	DIM A		DIM B		DIM C		MERITEC PART NUMBER		STANDARD PACKAGE QTY	
		mm	inches	mm	inches	mm	inches	WITHOUT ALIGNMENT PINS	WITH ALIGNMENT PINS	PER TRAY	TAPE & REEL
0.50 MM TSOP	40	11.85	.467	9.50	.374	13.61	.536	980020-40-P1	980020-40-P2	70	250*
	48	13.85	.545	11.50	.453	15.62	.615	980020-48-P1	980020-48-P2	63	250*
	56	15.85	.624	13.50	.531	17.63	.694	980020-56-P1	980020-56-P2	56	250*

* Note: when ordering tape and reel packaging, the part number should be followed by the letter "K."

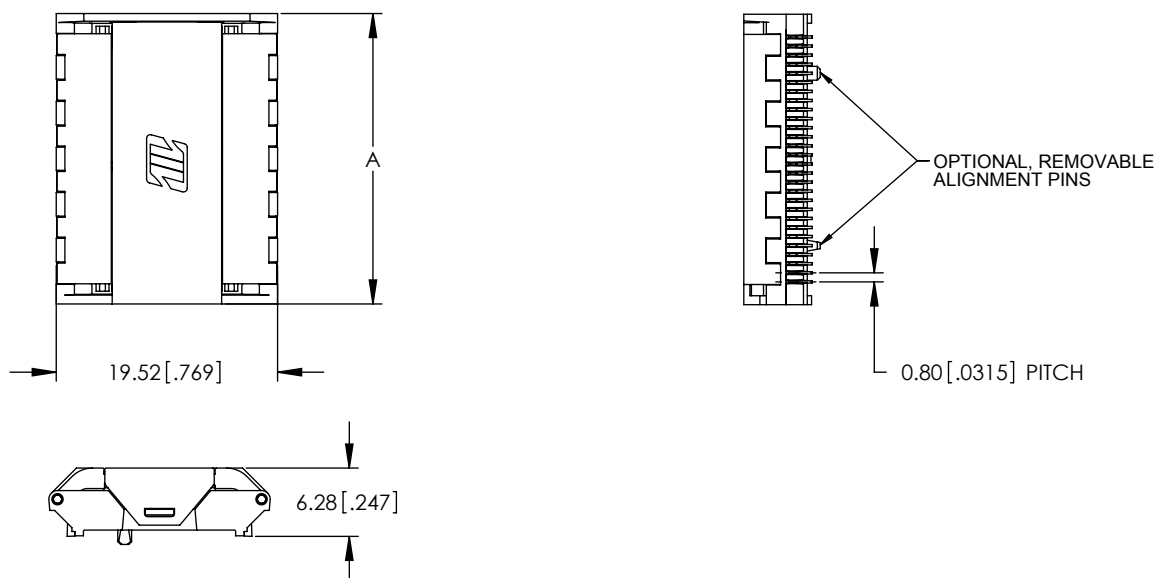


SOCKET LAND-PAD FOOTPRINT

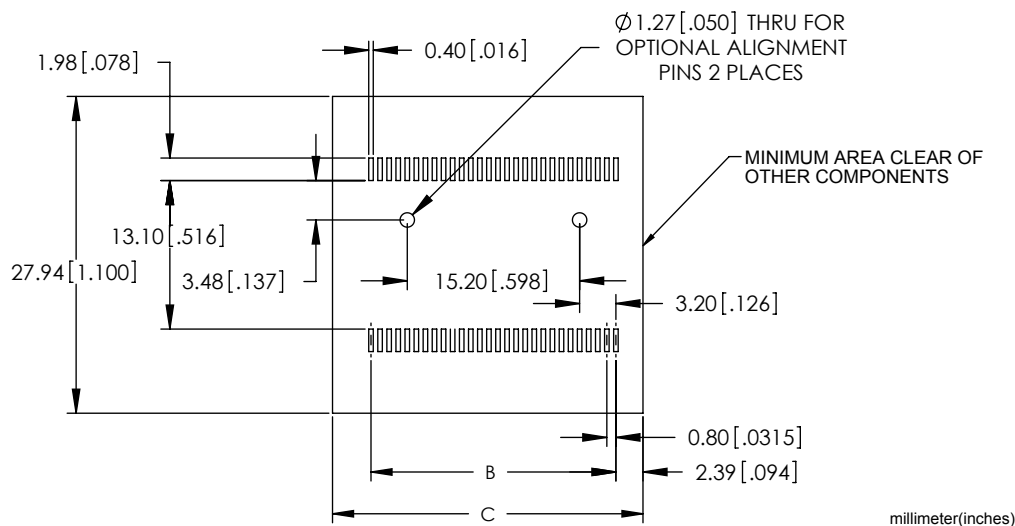


DIMENSION CHART

		DIM A		DIM B		DIM C		MERITEC PART NUMBER		STANDARD PACKAGE QTY	
PACKAGE	#LEADS	mm	inches	mm	inches	mm	inches	WITHOUT ALIGNMENT PINS	WITH ALIGNMENT PINS	PER TRAY	TAPE & REEL
0.80mm SSOP	56	25.60	1.008	21.60	.850	27.38	1.078	980022-56-P1	980022-56-P2	32	250*

* Note: when ordering tape and reel packaging, the part number should be followed by the letter "K".

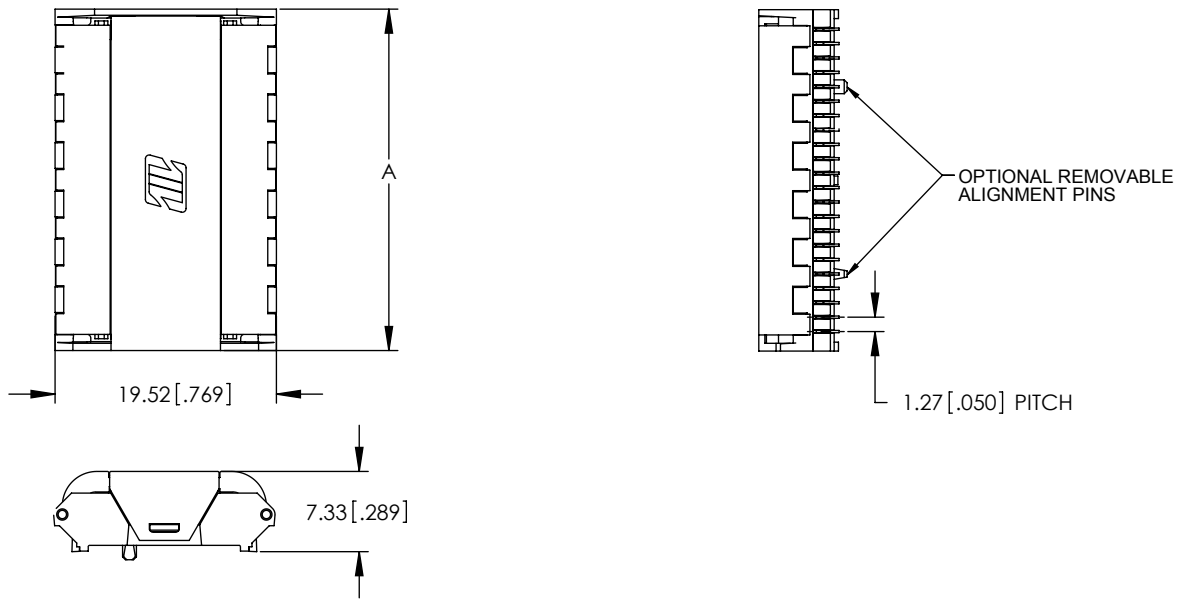

SOCKET LAND-PAD FOOTPRINT

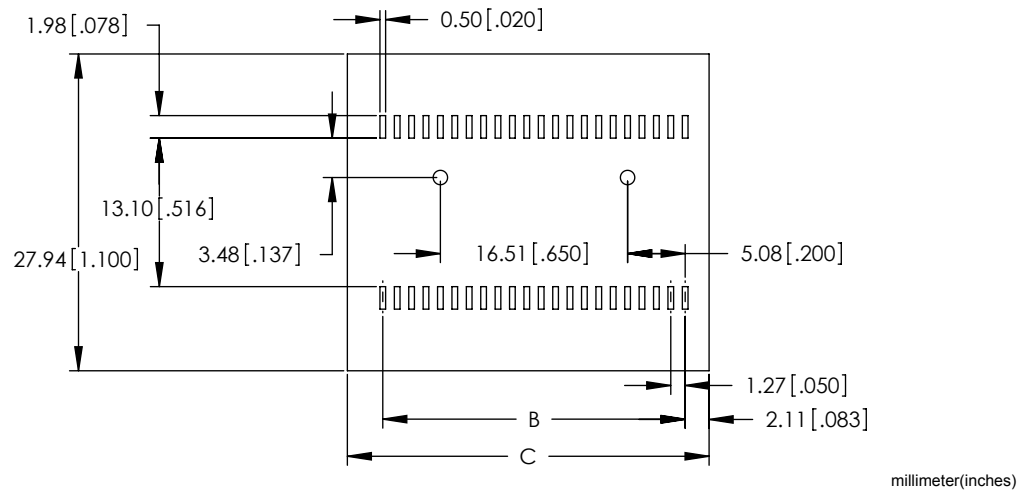

DIMENSION CHART

PACKAGE	#LEADS	DIM A		DIM B		DIM C		MERITEC PART NUMBER		STANDARD PACKAGE QTY	
		mm	inches	mm	inches	mm	inches	WITHOUT ALIGNMENT PINS	WITH ALIGNMENT PINS	PER TRAY	TAPE & REEL
1.27mm PSOP	44	30.10	1.185	26.67	1.050	31.90	1.256	980021-44-P1	980021-44-P2	32	250*

* Note: when ordering tape and reel packaging, the part number should be followed by the letter "K".

